
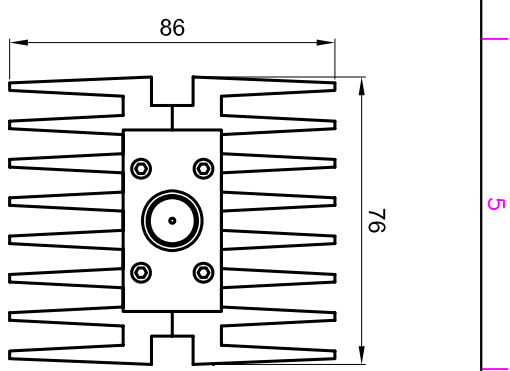


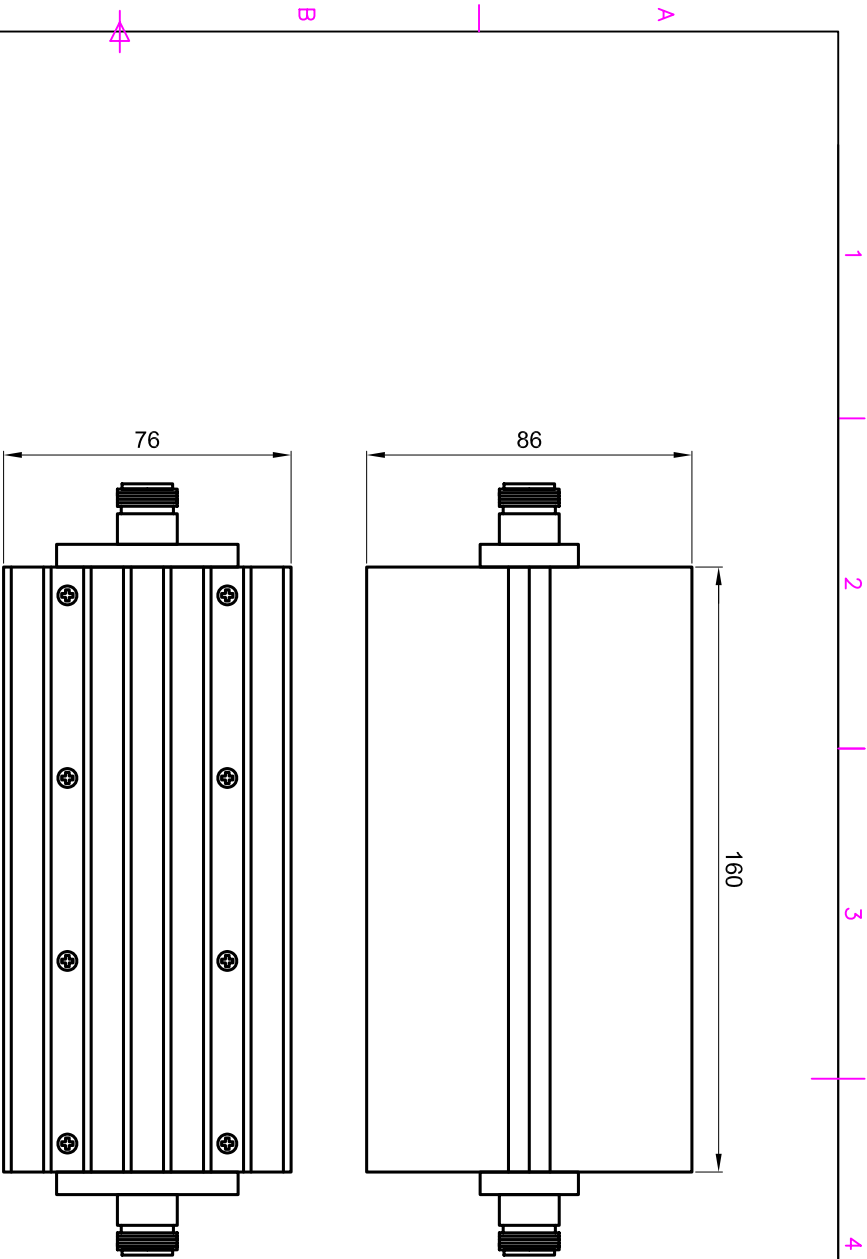

- Specification:
- 1. Nominal Impedance: 50Ω
 - 2. Frequency Range: DC-4GHz
 - 3. Nominal Attenuation & Error: 10±0.6dB@DC-2.5GHz, 10±0.8dB@2.5-4GHz
 - 4. VSWR: 1.25@DC-2.5GHz, 1.30@2.5-4GHz
 - 5. Power Rating: 100W (CW)
 - 6. Connector: Nf-Nf, Stainless Steel, gold plated beryllium copper contacts

参 考 信 息		制 图 / 校 核 / 审 核 / 材 料 检 查 表		图 号	525.0909
设计	DESIGNED_ ZYY	校对	CHECKED_ ZH	审核 - 日期	批准
BXT Technologies				10dB/100W/4GHz/Nf-Nf	1:2
RF Technologies				10A-1004-44B	EDITION SHEET
Tel:0591-83789500					
www.bxt-technologies.cn					