


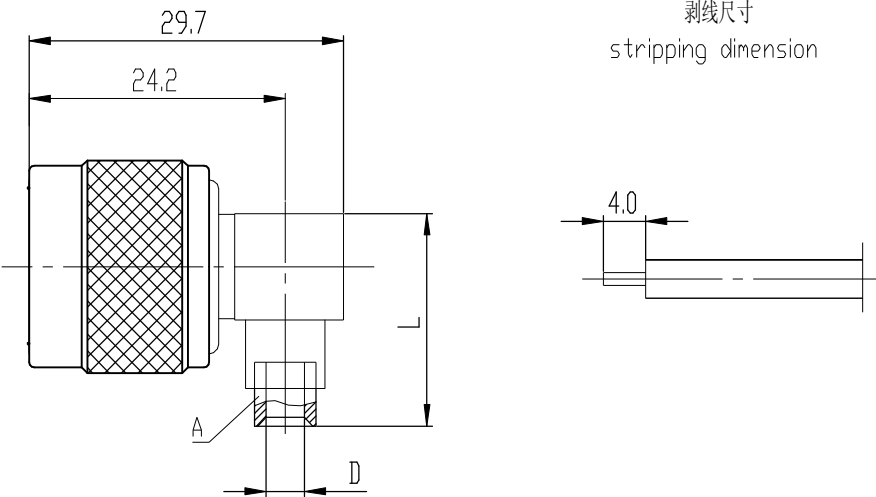

产品型号 type	零件 A part A	D	L	电缆型号 cable type
N-JWB3	黄铜, 镀金 brass, gold plated	∅3.6	20	SFT-50-3-1-RG402/U
N-JWB5A		∅6.4	19.5	670-250-SMT680-250

Electrical Characteristics:

- Characteristic Impedance: $50\ \Omega$
 - Frequency range: DC~11Ghz
 - Contact resistance
Center conductor: $\leq 1.0\ m\ \Omega$
Out conductor: $\leq 0.2\ m\ \Omega$
 - Insulation resistance: $\geq 5000M\ \Omega$
 - Insulator withstanding: 1500V
 - VSWR: ≤ 1.4
 - Durability: 500cycles
- Application: MIL-C-39012/1E

Material&Finishing

- Center contact:
Male: brass, gold plated
- Bodies and other metal parts:
brass, nickel plated
- Insulators: PTFE

主要性能指标:

- 特性阻抗: $50\ \Omega$
- 频率范围: DC~11Ghz
- 接触电阻:
中心导体: $\leq 1.0\ m\ \Omega$
外导体: $\leq 0.2\ m\ \Omega$
- 绝缘电阻: $\geq 5000M\ \Omega$
- 介质耐压: 1500V
- 电压驻波比: ≤ 1.4
- 插拔次数: 500次

执行标准: MIL-C-39012/1E

材料和镀层

- 中心接触件:
插针: 黄铜, 镀金
- 壳体和其它金属零件: 黄铜, 镀镍
- 绝缘子: 聚四氟乙烯
- 密封圈: 硅橡胶

4. Gasket: silicone rubber		SCALE	N-JWB3 N-JWB5A RF COAXIAL CONNECTOR	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE FRACTIONS DECIMALS ANGLES .X± .15 ±1° .XX± .05 .XXX±
		1.5:1		
	NAME	DATE	西安富士达科技股份有限公司 XI'AN FORSTAR S&T CO.,LTD.	
DRAWN				
CHECKED				
APPROVED				