


Uncontrolled Drawing

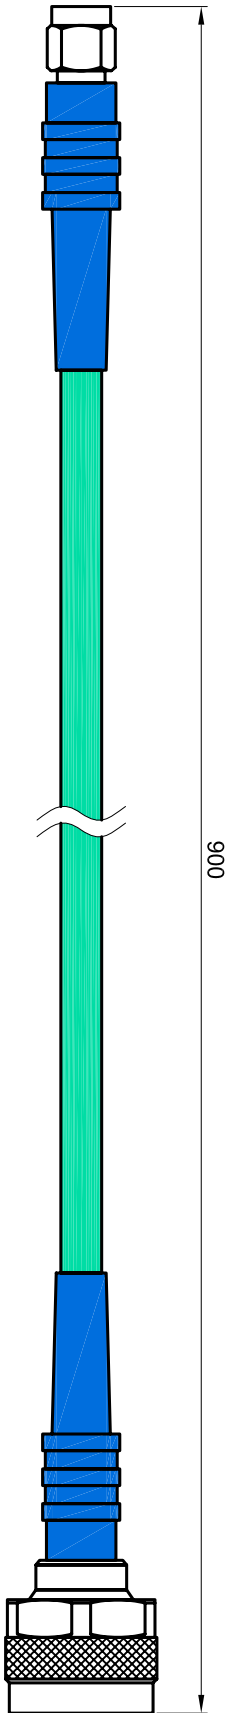

Type SMA male

Type N male

Specification:

- 1. Model: MC06-01-03-900
- 2. Nominal Impedance: 50Ω
- 3. Frequency Range: DC-6GHz, up to 8GHz
- 4. Insertion Loss: 0.80dB@DC-1GHz, 1.20dB@1-3GHz, 1.70dB@3-6GHz, 2.00dB@6-8GHz
- 5. VSWR: 1.15@DC-1GHz, 1.20@1-3GHz, 1.25@3-6GHz, 1.30@6-8GHz
- 6. Length: 0.9m
- 7. Connector: SMA male to N male
- 8. Power CW: 166W@6GHz

参 考 编 号	数 量	材 质 / 材 料	材 料 特 性 说 明	图 号	505.0330
材 料	材 料	材 料	材 料	材 料	材 料
DESIGNED_ZYY.SJH	CHECKED_ZH	APPROVED_	FILENAME	10/12/14	1:1
BXT Technologies			Test Cable Assembly		
Tel:0591-83789500			MC06-01-03-900		
www.bxt-technologies.cn			EDITION		
BXT			SHEET		
RF Technologies					