




This document contains proprietary information and such information may not be disclosed to others for any purposes, nor used for sales/marketing/procurement purposes without written permission

本文件包含专有信息，没有书面许可，该信息不能以任何形式披露给第三方，也不能用于任何目的购买、销售及采购。

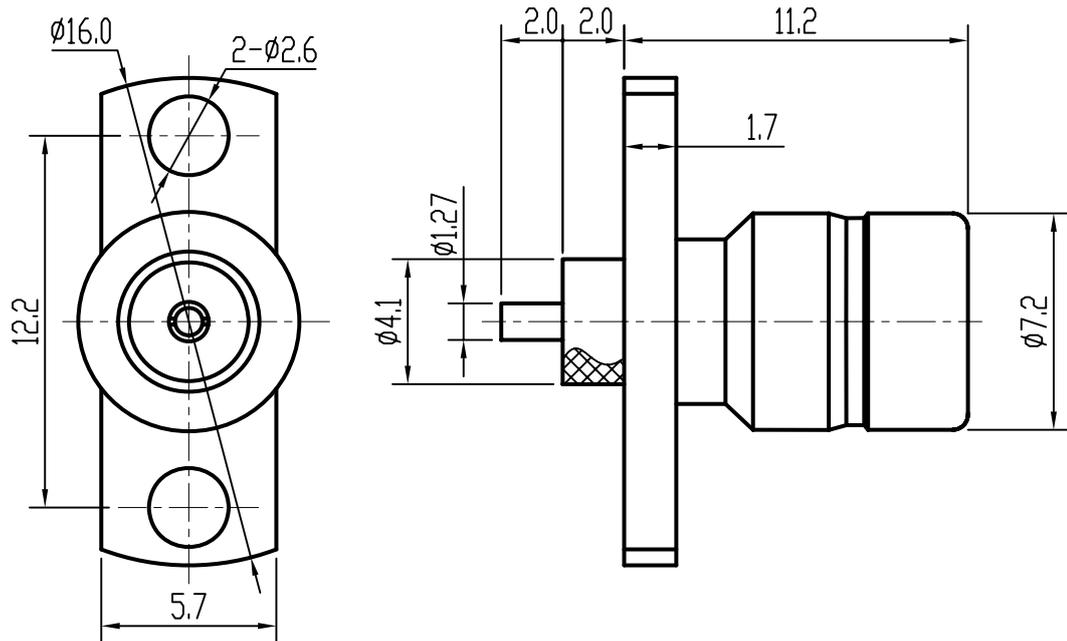

**Electrical Characteristics**

1. Characteristic Impedance: 50 Ω
2. Frequency range: DC~18.0GHz
3. Contact resistance  
Center conductor: ≤3.0 mΩ  
Out conductor: ≤2.0 mΩ
4. Insulation resistance: ≥5000MΩ
5. Insulator withstanding: 1000V
6. Durability: 200cycles

**Application: MIL-C-39012/55D**

**Material&Finishing**

1. Center contact :  
beryllium coper, gold plated
2. Body: brass, gold plated
3. Insulators: PTFE

**主要性能指标**

1. 特性阻抗: 50 Ω
2. 频率范围: DC~18.0GHz
3. 接触电阻:  
中心导体: ≤3.0 mΩ  
外导体: ≤2.0 mΩ
4. 绝缘电阻: ≥5000MΩ
5. 介质耐压: 1000V
6. 插拔次数: 200次

**执行标准: MIL-C-39012/55D**

**材料和镀层**

1. 中心接触件:  
镀青铜, 镀金
2. 壳体: 黄铜, 镀金
3. 绝缘子: 聚四氟乙烯

 	SCALE	CQA-KFD1	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE FRACTIONS DECIMALS ANGLES
	5:1		
	NAME	RF COAXIAL CONNECTOR	.X± .15 ±1°
	DATE		.XX± .05
DRAWN			.XXX±
CHECKED			
APPROVED			

西安富士达科技股份有限公司  
XI'AN FORSTAR S&T CO.,LTD.