


MW500-1679

3350 MHz to 4100 MHz

VOLTAGE CONTROLLED OSCILLATORS

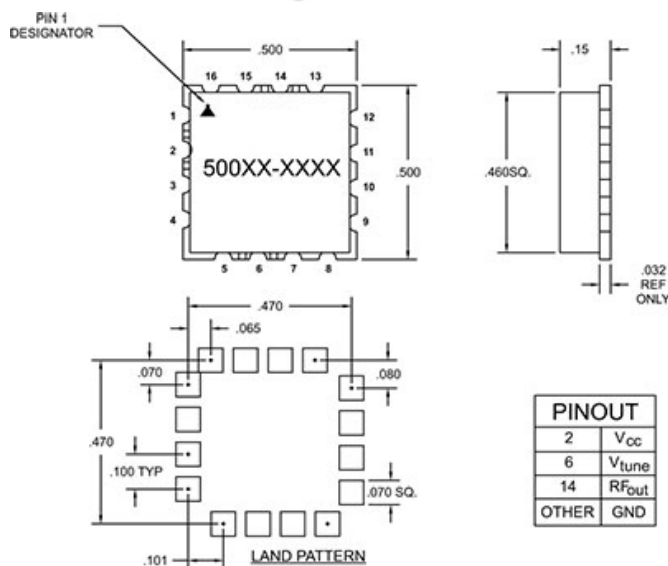

Specifications

Frequency	3350 MHz to 4100 MHz
Tuning Voltage	0.5/20 V
Power Output	6 +/- 3 dBm
Phase Noise	10 kHz Offset -95 (typ) dBc/Hz 100 kHz Offset -117 (typ) dBc/Hz
Frequency Pushing	5 MHz/V
Frequency Pulling	45 MHz
Harmonic Suppression	-15 (MAX)

Operating Specifications


Supply Voltage	12 Vcc
Supply Current	35 mA
Load Impedance	50
Operating Temperature	-40 to 85 °C

Notes



MERCURY COMMERCIAL ELECTRONICS

PIN 1
DESIGNATOR

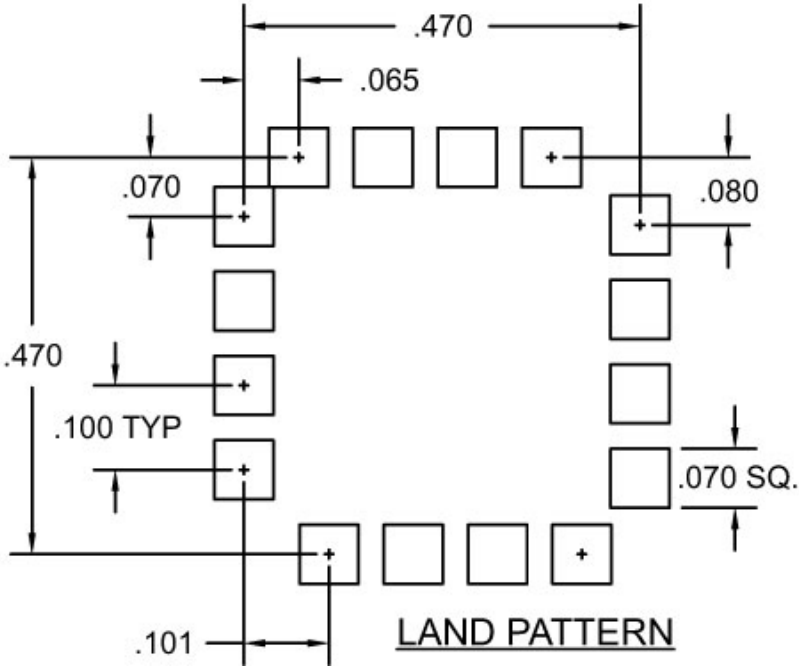

PINOUT	
2	V _{cc}
6	V _{tune}
14	RF _{out}
OTHER	GND