

All components used in this connector conform to RoHS standards.



Tolerances

1-20=+/-0.2
20-30=+/-0.3
30-40=+/-0.4
40-50=+/-0.5
50-100=+/-0.75
100-300=+/-1.5
Angles=+/-1


Dimensions are in Millimeters

Revisions		Approved	Date
Description/Approved/Date	Checked	M.H.	Date
	M.H.		
	Drawn	T.J.A.	03/28/08



NOTES (plating thickness in micro-inches):

1. Per QQ-B-626	6. Per ZZ-R-765	9. Nickel pl. 100 min. over copper strike
2. Per QQ-S-764	7. Per WW-1-799	10. Gold pl. 30 min. over nickel pl. 50 min. over copper strike
3. Per QQ-C-530	8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike	11. Gold pl. 30 min. over nickel pl. 50 min. over copper strike
4. Per QQ-B-750		

Approved by:
Date:

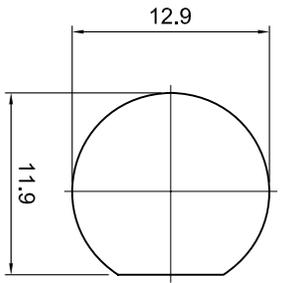

RECOMMENDED MOUNTING HOLE

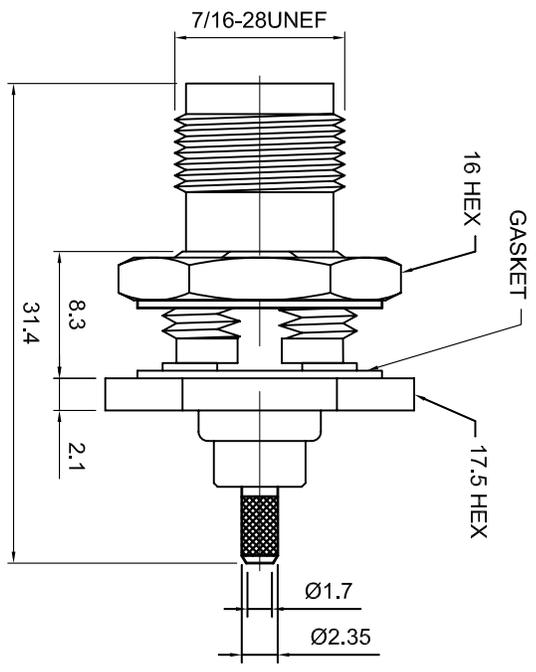

ITEM	MATERIAL	FINISH
Connector Body	Brass, Note 1	Nickel, Note 9
Center Contact: RPFemale	Brass, Note 1	Gold, Note 11
Insulation	Teflon, Note 5	None
Ferrule	Annealed Copper, Note 7	Same as body
Gasket	--	--
Hex Nut	Brass, Note 1	Same as body
Lock Washer	Brass, Note 1	Same as body



Lighthouse Technologies, Inc.
9511 Ridgely Court, Suite B
San Diego, California 92123
Part Number:
LT-TSRF13RNT-316-X1

Description RP TNC rear mount bulkhead crimp jack, 3.5 max panel		
Scale 2:1	Drawing No.	File Name TSRF13RNT-316-X1