


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

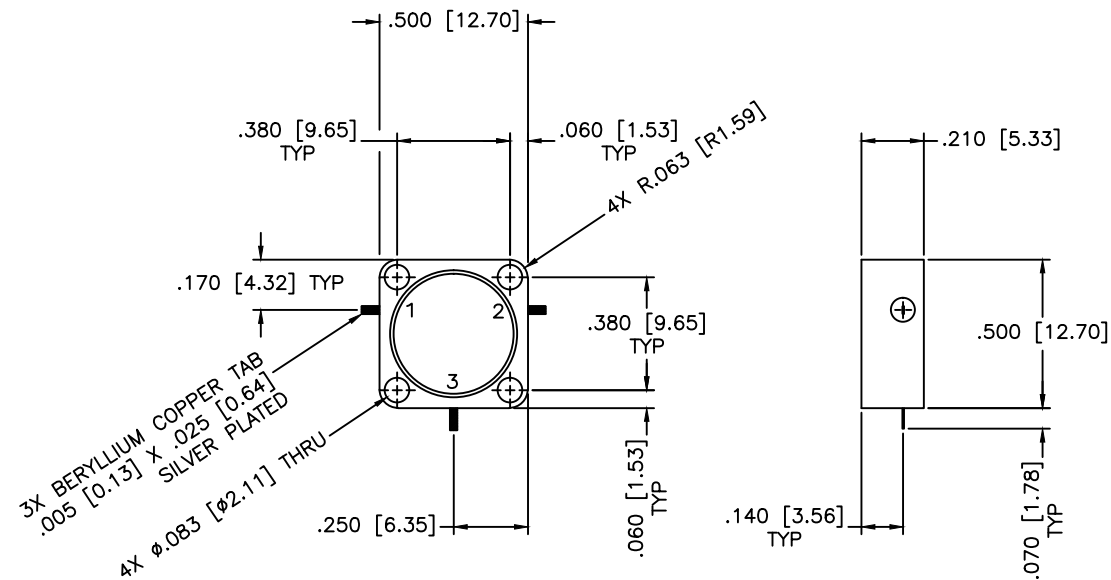

SPECIFICATIONS

Frequency Range: 12.75–13.25 GHz
Insertion Loss: 0.5dB Max.
Isolation: 20dB Min.
VSWR: 1.25:1 Max.
Power: 25W Avg. 200W Peak
Operating Temperature: –40°C to +85°C

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
				SHEET:	N/A
DRAWN: Paiboon Luekhamhan DATE: 06-21-2010 APPROVED: T. Nguyen DATE: 06-21-2010		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .01 \pm .005$ ANGLE: $\pm 1/2^\circ$			
		DRAWING TITLE: DROP-IN CIRCULATOR PART NO.: MC-44			
		CAGE CODE:	SIZE:	REV:	DWG. NO.
		OD2L5	N/A	N/A	84960
		DO NOT SCALE THE DRAWING			