


剥线尺寸
stripping dimension

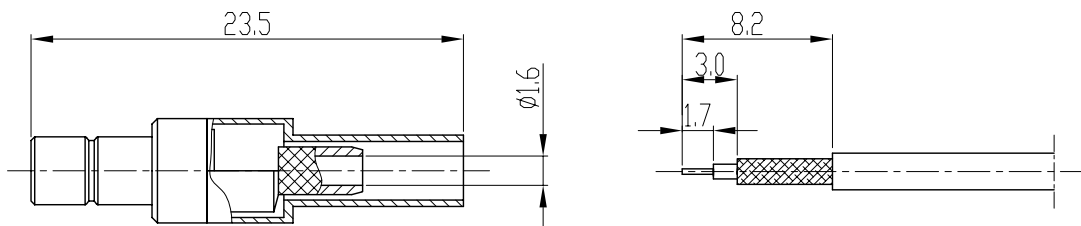

产品型号 type	电缆型号 cable type
SMB-J3	SFF-50-1.5-1、RG316/U

Electrical Characteristics:

1. Characteristic Impedance: $50\ \Omega$
2. Frequency range: DC~3Ghz
3. Contact resistance
Center conductor: $\leq 6.0\ m\Omega$
Out conductor: $\leq 1.0\ m\Omega$
4. Insulation resistance: $\geq 1000M\ \Omega$
5. Insulator withstanding: 750V
6. VSWR: ≤ 1.4
7. Durability: 500cycles

Application: MIL-C-39012/68A

Material&Finishing

1. Center contact:
Male: phosphor bronze, gold plated
2. Body: brass, gold plated
3. Crimp ferrule: copper, nickel plated
4. Insulators: PTFE

主要性能指标:

1. 特性阻抗: $50\ \Omega$
2. 频率范围: DC~3Ghz
3. 接触电阻:
中心导体: $\leq 6.0\ m\Omega$
外导体: $\leq 1.0\ m\Omega$
4. 绝缘电阻: $\geq 1000M\ \Omega$
5. 介质耐压: 750V
6. 电压驻波比: ≤ 1.4
7. 插拔次数: 500次

执行标准: MIL-C-39012/68A

材料和镀层

1. 中心接触件:
插针: 锡磷青铜, 镀金
2. 壳体: 黄铜, 镀金
3. 线夹: 黄铜, 镀镍
4. 绝缘子: 聚四氟乙烯

		SCALE	
		2.5:1	
	NAME	DATE	
DRAWN			
CHECKED			
APPROVED			

SMB-J3
RF COAXIAL CONNECTOR

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE mm, TOLERANCES ARE
FRACTIONS DECIMALS ANGLES
.X $\pm$.15 $\pm 1^\circ$
.XX $\pm$.05
.XXX $\pm$

西安富士达科技股份有限公司
XI'AN FORSTAR S&T CO.,LTD.