


Ceramic Loads

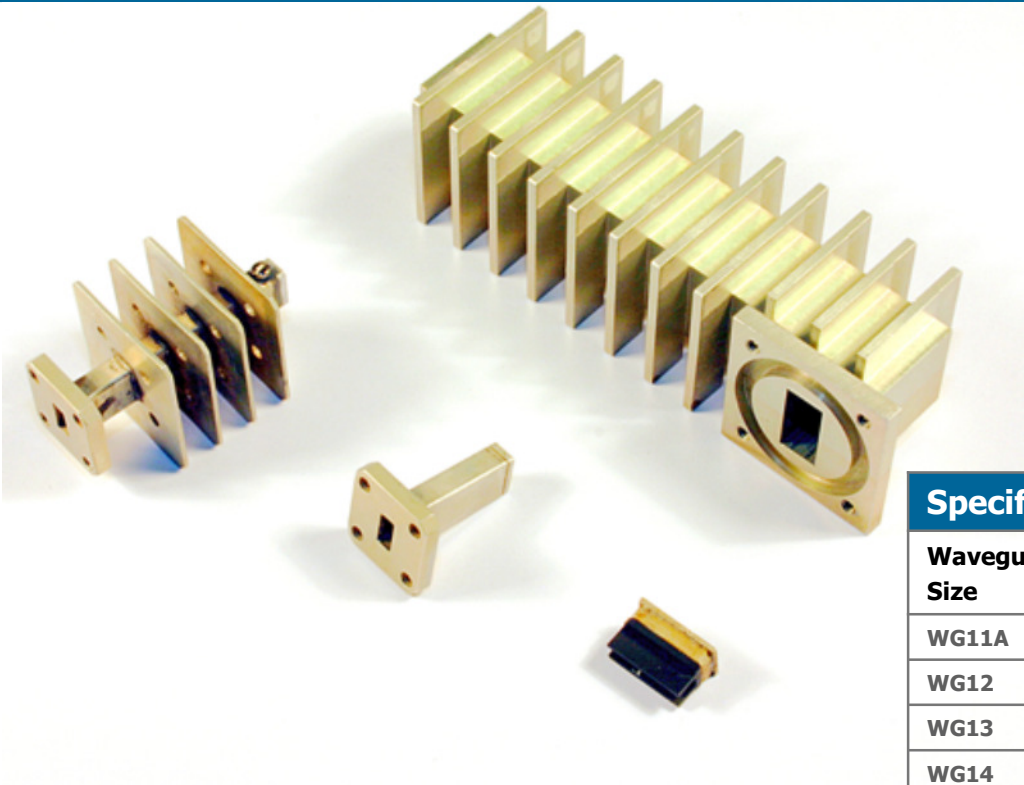

- MESL offers a range of full band ceramic loads
- Either conduction cooled or finned for air cooled option

Specification				
Waveguide Size		Frequency Range (GHz)	Average Power (Watts)	Maximum VSWR
WG11A	WR229	3.3 – 4.9	150	1.15
WG12	WR187	3.95 – 5.85	100	1.15
WG13	WR159	4.9 – 7.05	80	1.15
WG14	WR137	5.85 – 8.2	70	1.15
WG15	WR112	7.05 – 10.0	40	1.15
WG16	WR90	8.2 – 12.4	30	1.15
WG17	WR75	10.0 – 15.0	25	1.15
WG18	WR62	12.4 – 18.0	20	1.15
WG19	WR51	15.0 – 22.0	18	1.15
WG20	WR42	18.0 – 26.5	15	1.15
WG21	WR34	22.0 – 33.0	12	1.15
WG22	WR28	26.5 – 40.0	10	1.15