

8MP20-9500/T750-P/P — *Mini-Pack*®

◆ Features:

- Ultra Low Profile Package
- Weight Reduction of 72% on Standard Design
- Volume Reduced by 72.5% on Standard Design
- Exceptional Ultimate Stopband Performance
- Designs from 6 to 18 GHz Available
- 4 to 10 Section Designs




◆ Specifications:

Center Frequency: 9500 MHz
 Insertion Loss at f_0 : 1.0 dB maximum
 -3 dB Bandwidth: 750 MHz
 Return Loss: 14 dB minimum
 Rejection at 9000 MHz: 35 dB minimum


Rejection at 10,000 MHz: 35 dB minimum
 Operating Temperature: -40° C to +85° C
 Dimensions: 1.178" x 0.475" x 0.17"
 Weight: 2.9 Grams

◆ Applications:

- Avionic
- Marine
- Radar
- Missile Guidance
- High Frequency Synthesizers

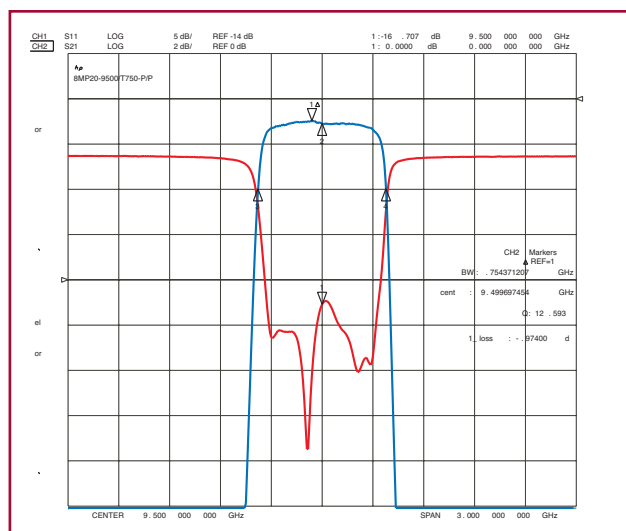

Attenuation Return Loss

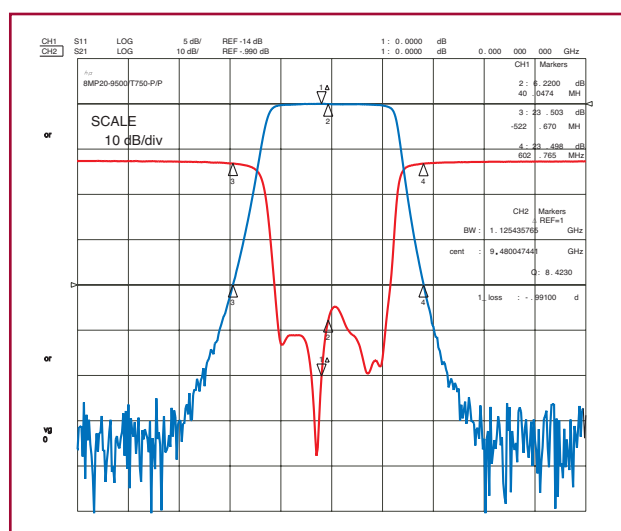

Insertion Return Loss

www.klmicrowave.com
 Phone: 410-749-2424 • FAX: 443-260-2268
 Email: sales@klmicrowave.com



www.klfilterwizard.com
 2250 Northwood Drive
 Salisbury, MD 21804