



BNC Twinax Jack Connector Solder Attachment 4 Hole Flange  
Solder Cup Terminal, .500 inch Threaded Hole Spacing

**TECHNICAL DATA SHEET**

**PE4324**

**BNC Twinax Jack Connector Solder Attachment 4 Hole Flange Solder Cup Terminal, .500 inch Threaded Hole Spacing**

**Configuration**

|                                          |                 |
|------------------------------------------|-----------------|
| Connector                                | BNC Twinax Jack |
| Connector Interface Type                 | Solder Cup      |
| Cable Attachment Method (Shield/Contact) | Solder          |
| Body Style                               | Straight        |
| Mount Method                             | 4 Hole Flange   |

**Electrical Specifications**

|                 |    |
|-----------------|----|
| Impedance, Ohms | 78 |
|-----------------|----|

**Mechanical Specifications**

**Size**

|                     |               |
|---------------------|---------------|
| Length, in [mm]     | 1.03 [26.16]  |
| Width/Dia., in [mm] | 0.687 [17]    |
| Height, in [mm]     | 0.687 [17.45] |
| Weight, lbs [g]     | 0.013 [5.9]   |

**Connector**

|                              |                 |
|------------------------------|-----------------|
| Type                         | BNC Twinax Jack |
| Contact Material and Plating | Silver          |
| Body Material and Plating    | Brass, Nickel   |
| Dielectric Type              | PTFE            |

**Compliance Certifications** (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

|                |     |
|----------------|-----|
| RoHS Compliant | Yes |
|----------------|-----|

**Plotted and Other Data**

|        |                            |
|--------|----------------------------|
| Notes: | Values at 25 °C, sea level |
|--------|----------------------------|

URL: <http://www.pasternack.com/bnc-twinax-jack-standard-solder-cup-terminal-connector-pe4324-p.aspx>


BNC Twinax Jack Connector Solder Attachment 4 Hole Flange Solder Cup Terminal, .500 inch Threaded Hole Spacing from Pasternack Enterprises has same day shipment for domestic and International orders. We maintain 99% availability of the industry's broadest selection of RF, microwave and fiber optic products.

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



# PE4324 CAD Drawing

BNC Twinax Jack Connector Solder Attachment 4 Hole Flange  
Solder Cup Terminal, .500 inch Threaded Hole Spacing

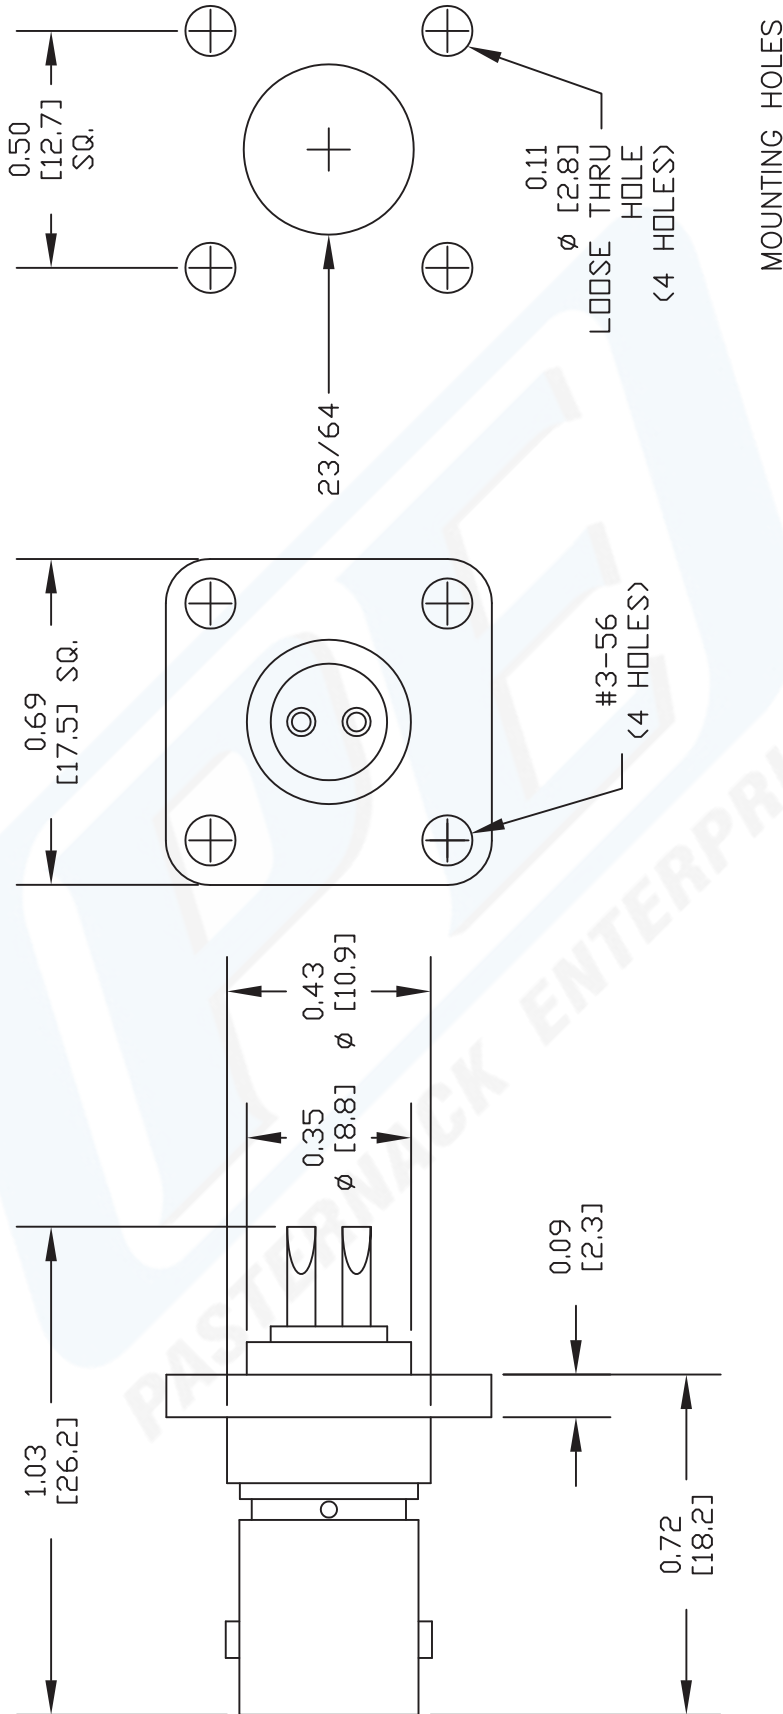

- NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
  2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
  3. DIMENSIONS ARE IN INCHES [mm].
  4. FITS MIL-C-17 AND EQUIVALENT CABLES.

DWG TITLE

**PE4324**

FSCM NO. 53919

CAD FILE 020513

SCALE N/A

SIZE A

2231

**PE PASTERNAK®**

Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: [www.pasternack.com](http://www.pasternack.com) | E-Mail: [sales@pasternack.com](mailto:sales@pasternack.com)