
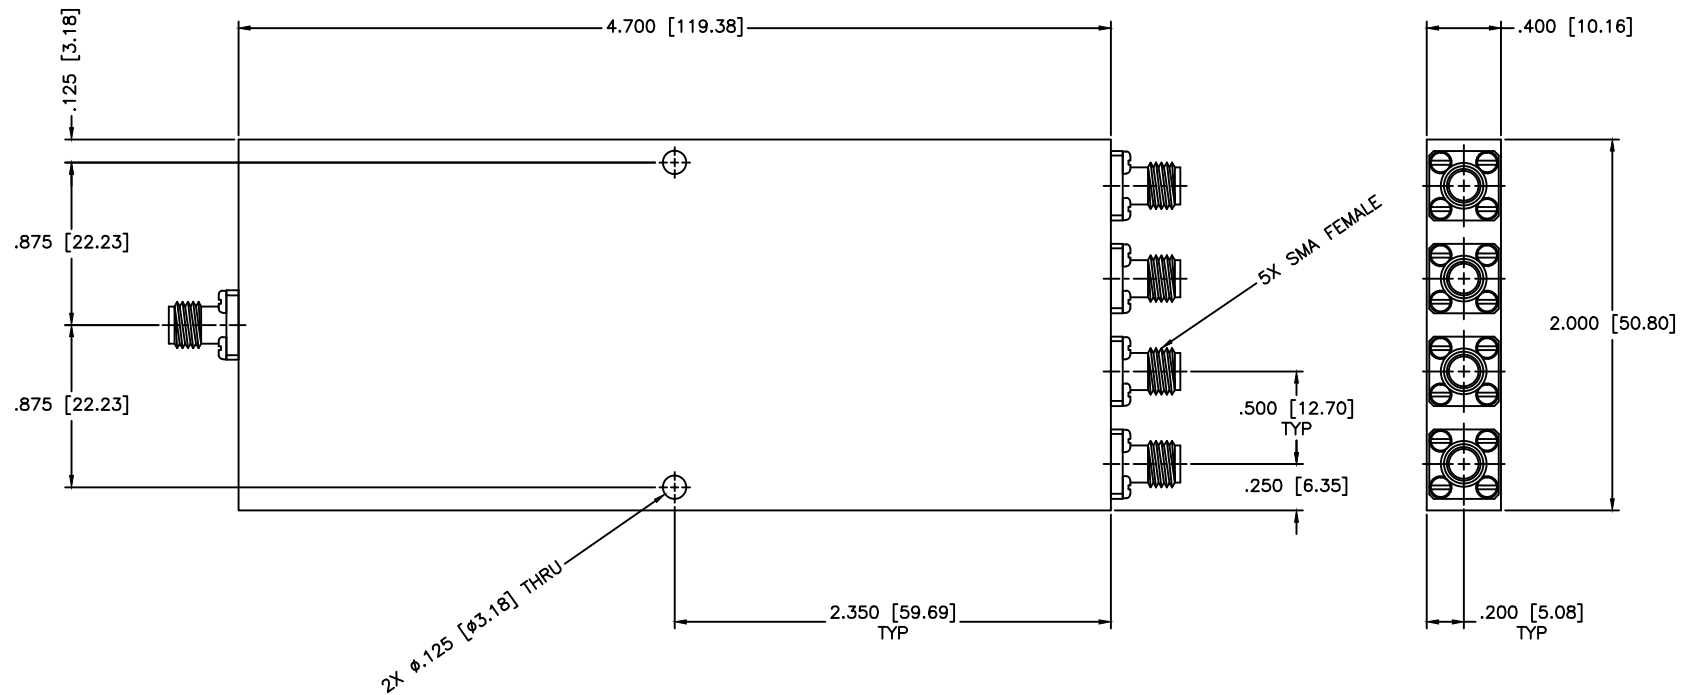


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED



SPECIFICATIONS

Frequency Range: 2–12 GHz
 VSWR: 1.50:1 Max.
 Amplitude Balance: ± 0.4 dB Max.
 Phase Balance: ± 5 Deg. Max.
 Insertion Loss: 1.9 dB Max.
 Isolation: 17 dB Min.
 Power: 10W (VSWR @ 1.2)

MATERIAL:		 MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: 4-WAY POWER DIVIDER	
DRAWN: Paiboon Luekhamhan		DATE: 06-29-1999		PART NO. PS4-101	
APPROVED: T. Nguyen		DATE: 06-29-1999		DWG NO. 81340	
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE REPRODUCED OR TRANSMITTED IN ANY FORM WITHOUT PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		CAGE CODE: OD2L5	
		THIRD ANGLE PROJECTION 		SIZE: A REV: N/A DO NOT SCALE THE DRAWING	