
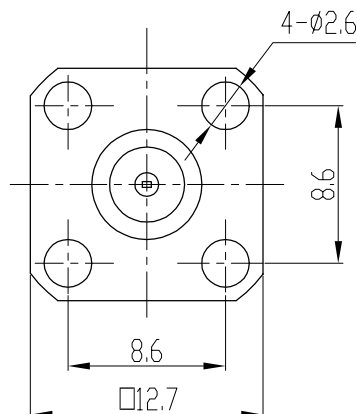


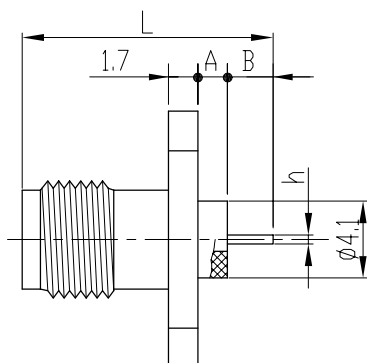

产品型号 type	L	L1	L2	h
SMA-KFD13	16.1	4.0	2.6	0.5X0.2
SMA-KFD39	12.1	0	2.6	0.5X0.2
SMA-KFD335	13.0	2	1.5	1.0X0.2
SMA-KFD32	16.1	0	2.5	1.3X0.2
SMA-KFD39A	12.1	0	2.6	1.0X0.2
SMA-KFD253	15.7	3.2	3.0	1.3X0.2

Electrical Characteristics:

- Characteristic Impedance: 50 Ω
- Frequency range: DC~18Ghz
- Contact resistance
Center conductor: $\leq 3.0 \text{ m}\Omega$
Out conductor: $\leq 2.0 \text{ m}\Omega$
- Insulation resistance: $\geq 5000 \text{ M}\Omega$
- Insulator withstanding: 1000V
- Durability: 500cycles

Application: MIL-C-39012/55D

Material&Finishing

- Center contact :
Female: beryllium, gold plated
- Body: brass, gold plated
- Insulators: PTFE

主要性能指标:

- 特性阻抗: 50 Ω
- 频率范围: DC~18Ghz
- 接触电阻:
中心导体: $\leq 3.0 \text{ m}\Omega$
外导体: $\leq 2.0 \text{ m}\Omega$
- 绝缘电阻: $\geq 5000 \text{ M}\Omega$
- 介质耐压: 1000V
- 插拔次数: 500次

执行标准: MIL-C-39012/55D

材料和镀层

- 中心接触件:
插孔: 铍青铜, 镀金
- 壳体: 黄铜, 镀金
- 绝缘子: 聚四氟乙烯

		SCALE	
		2.5:1	
	NAME	DATE	
DRAWN			
CHECKED			
APPROVED			

SMA-KFD13
RF COAXIAL CONNECTOR

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE mm, TOLERANCES ARE
FRACTIONS DECIMALS ANGLES
.X $\pm$.15 $\pm 1^\circ$
.XX $\pm$.05
.XXX $\pm$

西安富士达科技股份有限公司
XI'AN FORSTAR S&T CO.,LTD.