
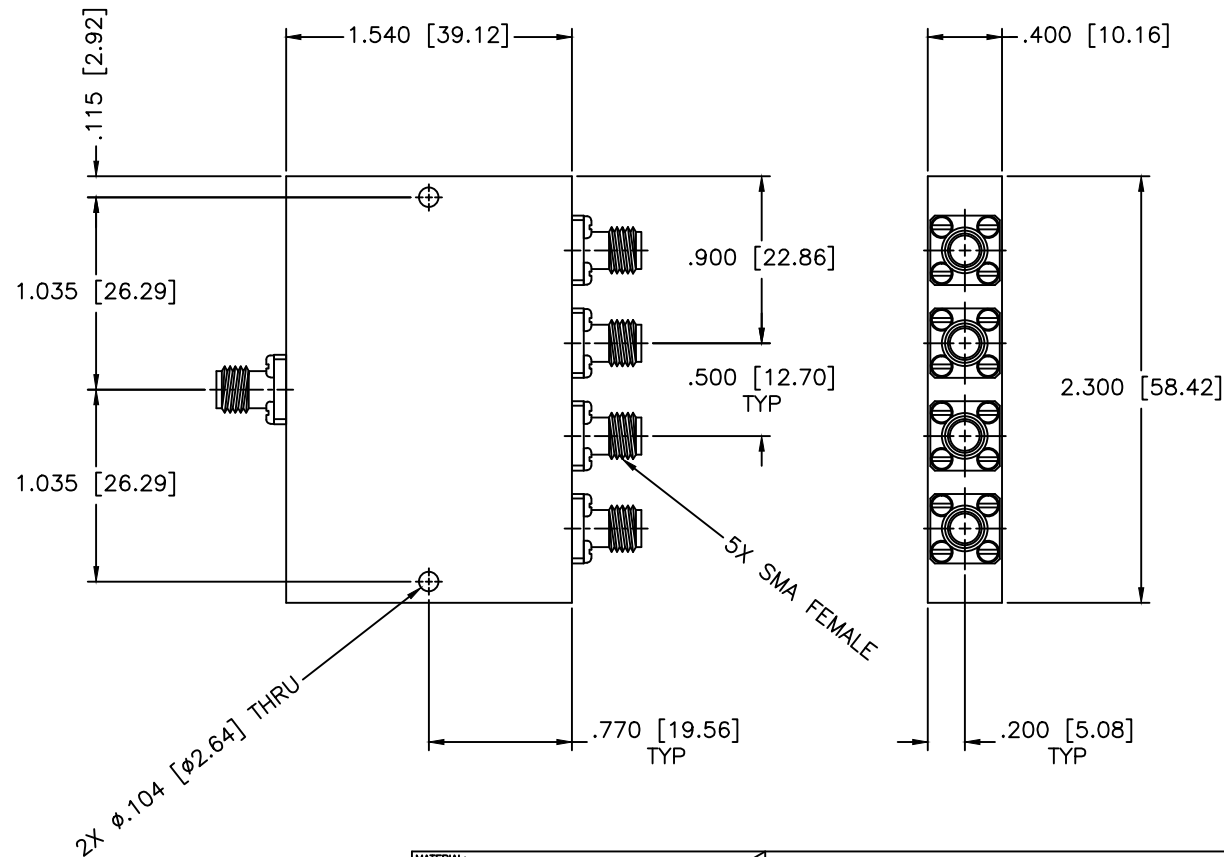


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED



SPECIFICATIONS

Frequency Range: 6.7–7.075 GHz
 Insertion Loss: 0.8dB Max.
 Isolation: 19dB Min.
 VSWR Input/Output: 1.50:1/1.40:1 Max.
 Amplitude Balance: ± 0.3 dB Max.
 Phase Balance: ± 6 Deg. Max.
 Power: 30 Watts (Load vswr@1.2)

MATERIAL:  MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
		SHEET: N/A	
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: 4-WAY POWER DIVIDER	
		PART NO. PS4-102	
DRAWN: Paiboon Luekhamhan	DATE: 06-29-1999	CAGE CODE: OD2L5	SIZE: A REV: N/A DO NOT SCALE THE DRAWING
APPROVED: T. Nguyen	DATE: 06-29-1999	THIRD ANGLE PROJECTION 	DWG NO. 81006