


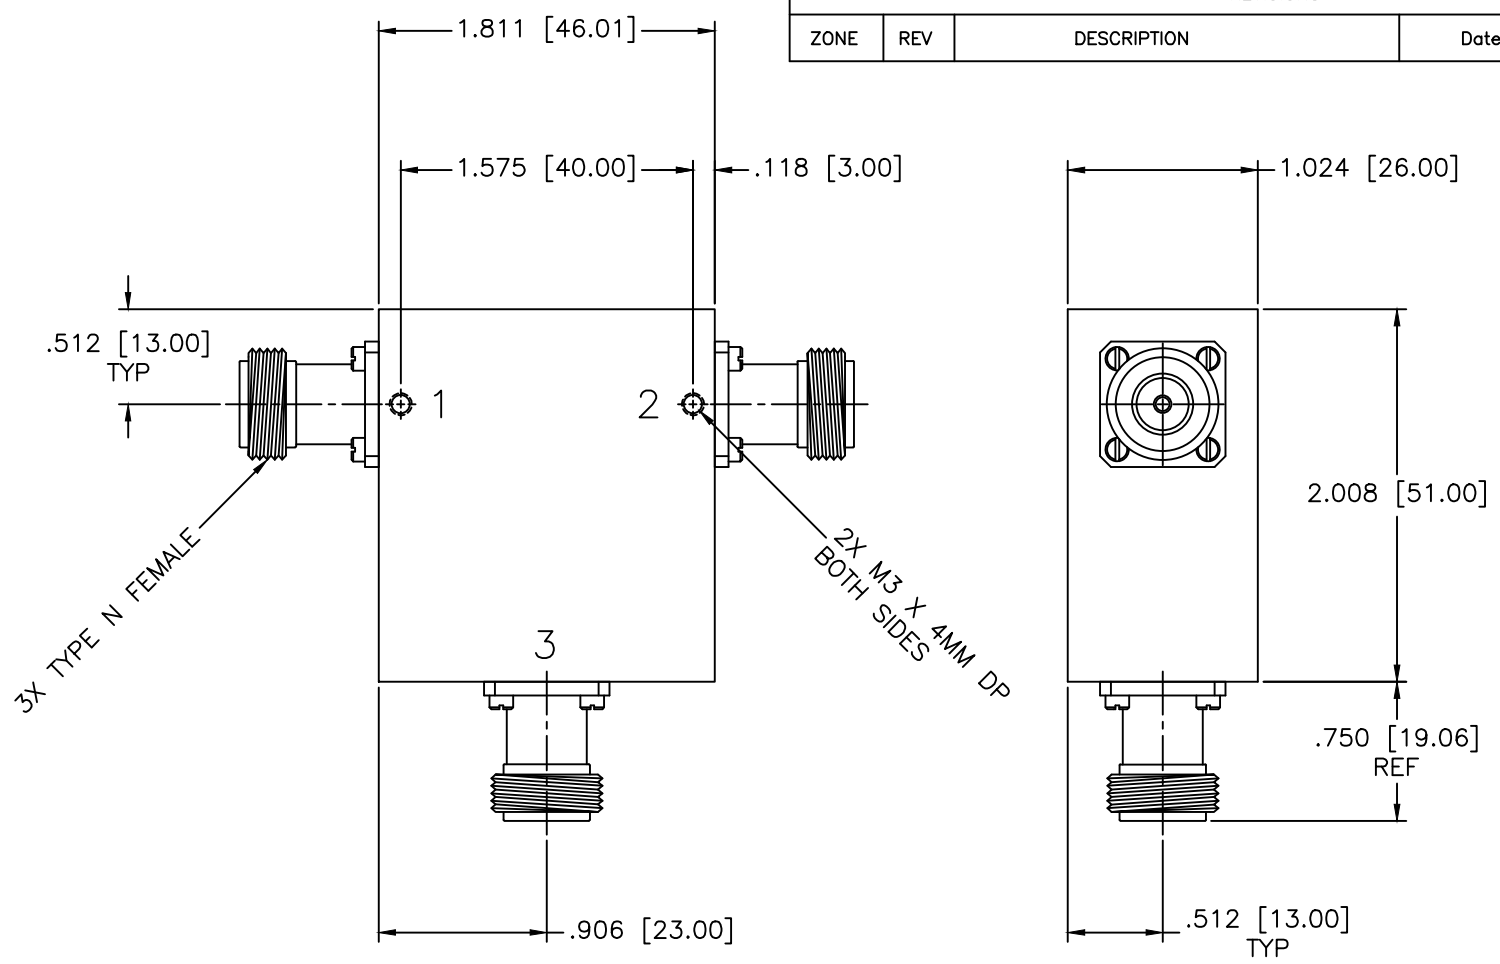

REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

SPECIFICATIONS

Frequency Range: 450–550 MHz
 VSWR: 1.25:1 Max.
 Average Power: 200 Watts
 Insertion Loss: 0.30dB Max.
 Isolation: 20dB Min.
 Operating Temperature: –15°C to +60°C

MATERIAL: DRAWN: Paiboon Luekhamhan APPROVED: T. Nguyen		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A SHEET: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2° THIRD ANGLE PROJECTION		
		DRAWING TITLE: COAXIAL CIRCULATOR PART NO.: CS-183/NF		
		DATE: 02-10-2012 DATE: 10-06-2011	CAGE CODE: 0D2L5 SIZE: A REV: N/A DO NOT SCALE THE DRAWING	DWG NO.: 85997