




Amplitude (dB)

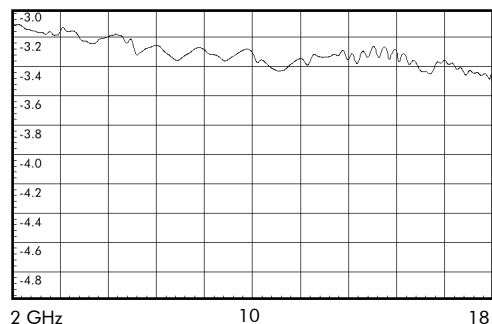


Phase (deg.)

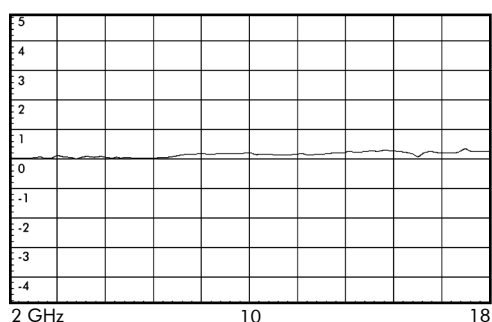

Return Loss (dB)

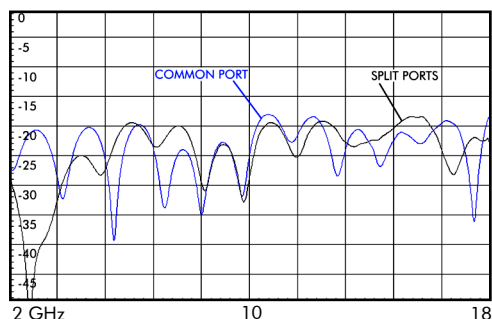

Isolation (dB)

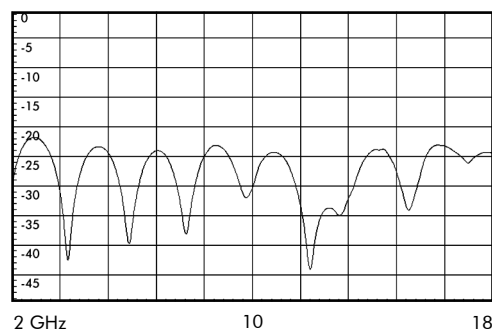

ELECTRICAL SPECIFICATIONS

Frequency Range.....	2,000~18,000 MHz
Insertion Loss.....	1.0 dB, max.
Input Power.....	10 Watts, max.
Input/Output VSWR.....	1.5:1, max.
Isolation.....	18 dB, min.
Phase Balance.....	5 deg., max.
Amplitude Balance.....	0.4 dB, max.
Connection Interface.....	SMA-Female


FEATURES

All units serialized with test data provided.

Compact form factor.

Wide frequency response.

MECHANICAL OUTLINE

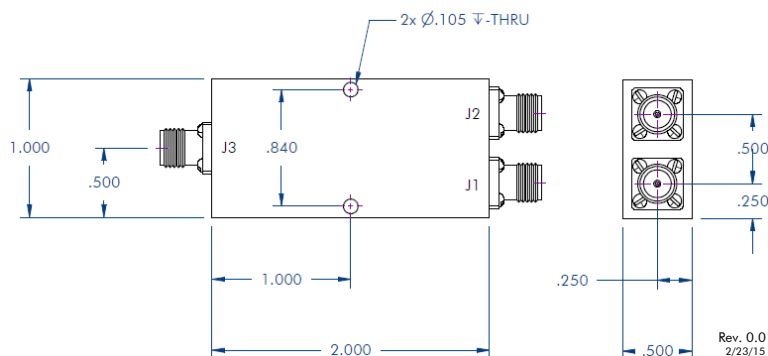

Electrical data, mechanical outline, specification and product photo are representative. Unit-to-unit performance and appearance may vary. Specifications contained herein are subject to change without notice. This document does not constitute a contract of any kind.

Short-Runs
Custom Work
Production

WERBEL MICROWAVE, LLC

51 Chestnut Street, Livingston, New Jersey 07039
Tel. (973) 900-2480 – Fax (973) 716-9430 – Sales@WerbelMicrowave.com
www.WerbelMicrowave.com

