

1.0 PERFORMANCE: (sea level)
 1.1 FREQUENCY RANGE: DC-11 GHz
 1.2 NOMINAL IMPEDANCE: 50 OHMS
 1.3 DWV: 1,000 Vrms @ 60 Hz
 1.4 TEMPERATURE RANGE: -40 TO +165°C


2.0 MATERIALS:
 2.1 DIELECTRIC: PTFE
 2.2 CONTACT: BeCu
 2.3 BODY/NUT: SS-303
 2.4 LOCKWASHER: SS-303
 2.5 O-RING: SI RUBBER

4.0 MECHANICAL
 4.1 INTERFACE PER MIL-STD-348
 4.2 CONTACT RETENTION:
 6 LBS MIN AXIAL
 TORQUE: N/A
 4.3 DURABILITY: 1000 CYCLES

DWG NO. OL-0410-49-1		REV. A
PART NUMBER 0410-49-PJ	BODY PASSIVATE	CONTACT Au/Ni

PLATING PER SAN-TRON SPEC. 7.3.1-8

3.0 FINISHES: SEE TABLE

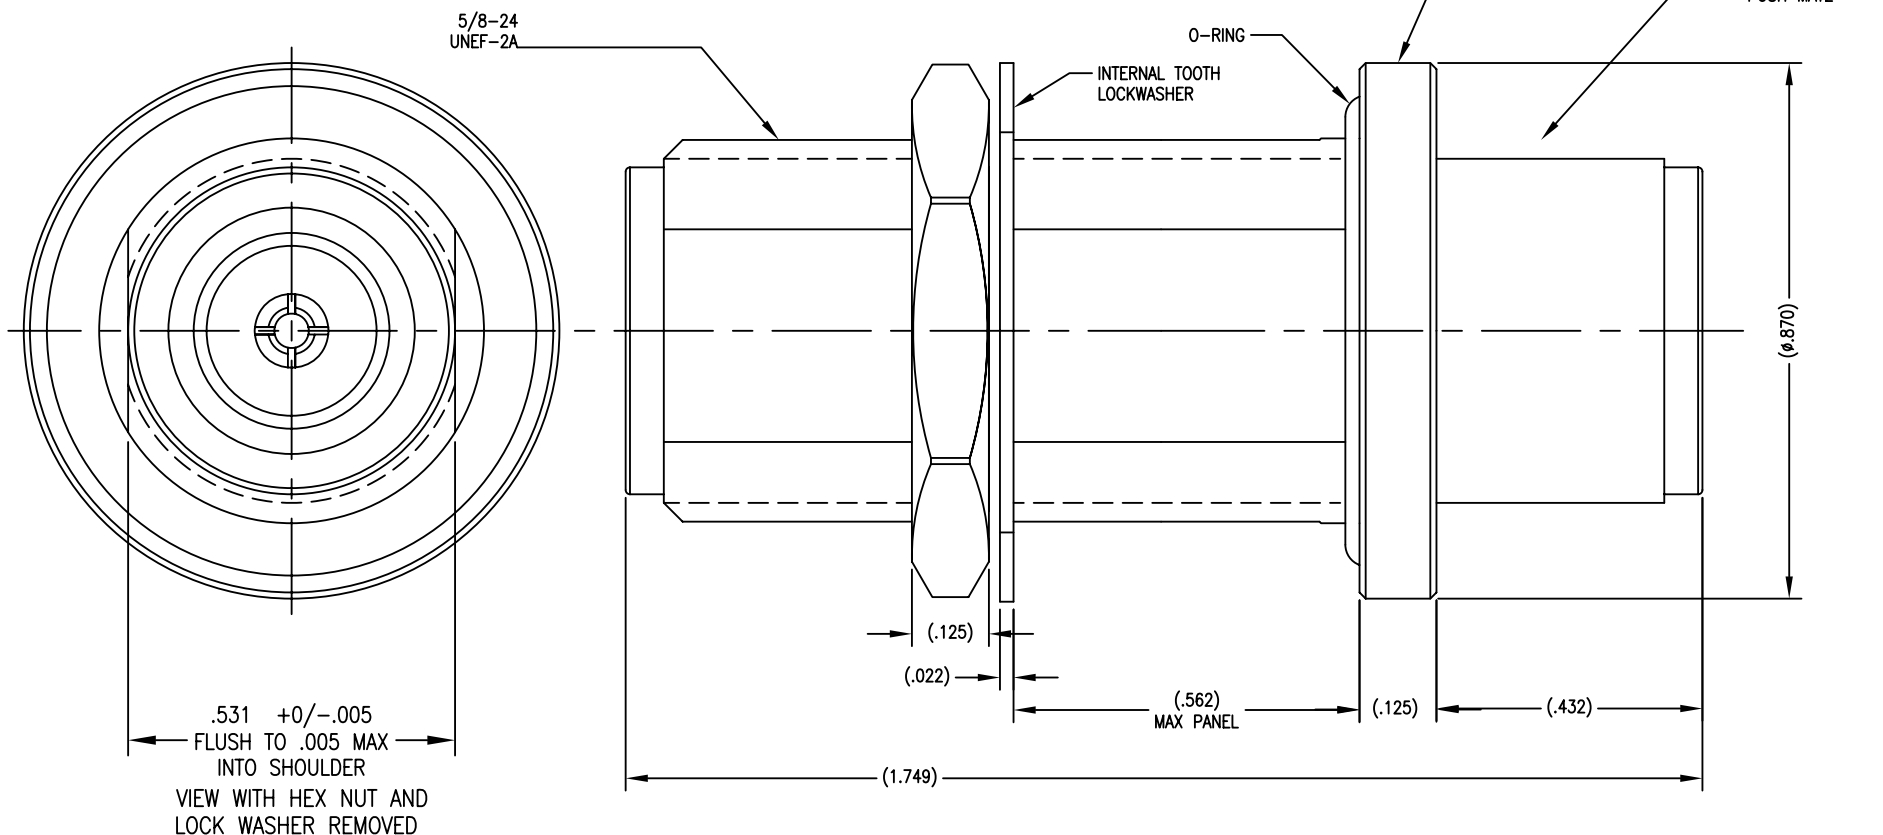

DO NOT SCALE DRAWING

				THIS DRAWING CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO SAN-TRON, INC. IT MUST NOT BE REPRODUCED OR DISCLOSED TO OTHERS OR USED IN ANY OTHER WAY, IN WHOLE OR PART EXCEPT AS AUTHORIZED IN WRITING BY SAN-TRON, INC.				SAN-TRON, INC. 4 NEWBURYPORT TPK. IPSWICH MA USA 01938 TEL: 978 - 356 -1585 FAX: 978 - 356 -1573 WWW.santron.com E MAIL: santron@santron.com			
				UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS ARE IN INCHES. ALL DIMENSIONS ARE AFTER PLATING. .XXX= ±.005 ALL MACHINED SURFACES $\sqrt{64}$ MAX. .XX= ±.01 ANG.±1/2° FRACTIONAL= ±1/64 ◎.004 MAX. TIR. ⊥ AXIS .001				TITLE N ADAPTER, N (F) - N (F), STRAIGHT BULKHEAD MOUNT			
A RELEASE TO PRODUCTION				NEW	4/28/10	TMW	FSH	MATERIAL: SEE NOTES			
2 PRELIMINARY: DO NOT MFG					4/19/10	✗	✗	FINISH: SEE TABLE			
Rev.	Revisions			Disp.	Date	Dwn.	Appd.	CAGE CODE: 50896			
		Ref.: SK-	REMOVE ALL BURRS AND SHARP EDGES .005 MAX.	INTERPRET PER ASME Y14.5M-1994				DWG NO. OL-0410-49-1			
				THIRD ANGLE PROJECTION				SCALE X:X			
				DWN	JTH	3/30/10		REV. A			
				CHKD	SJS	4/29/10					
				APPR	FSH	4/30/10					