
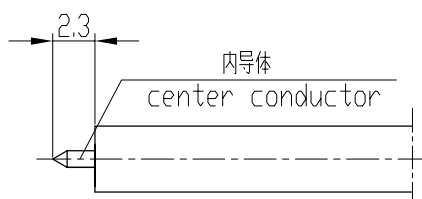


剥线尺寸
stripping dimension



产品型号 type	电缆型号 cable type
SMA-JB3B	SFT-50-3-1-RG402/U

Electrical Characteristics:

- Characteristic Impedance: $50\ \Omega$
- Frequency range: DC~18GHz
- Contact resistance
Center conductor: $\leq 3.0\ m\Omega$
Out conductor: $\leq 2.0\ m\Omega$
- Insulation resistance: $\geq 5000M\ \Omega$
- Insulator withstanding: 1000V
- VSWR: ≤ 1.3
- Durability: 500cycles

Application: MIL-C-39012/55D

Material&Finishing

- Center contact :
Male: brass, gold plated
- Bodies: brass, gold plated
- Insulators: PTFE


主要性能指标:

- 特性阻抗: $50\ \Omega$
- 频率范围: DC~18GHz
- 接触电阻:
中心导体: $\leq 3.0\ m\Omega$
外导体: $\leq 2.0\ m\Omega$
- 绝缘电阻: $\geq 5000M\ \Omega$
- 介质耐压: 1000V
- 电压驻波比: ≤ 1.3
- 插拔次数: 500次

执行标准: MIL-C-39012/55D

材料和镀层

- 中心接触件:
插针: 黄铜, 镀金
- 壳体: 黄铜, 镀金
- 绝缘子: 聚四氟乙烯

		SCALE		SMA-JB3B RF COAXIAL CONNECTOR	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE FRACTIONS DECIMALS ANGLES .X± .15 ±1° .XX± .05 .XXX±
		2.5:1			
	NAME	DATE	西安富士达科技股份有限公司 XI'AN FORSTAR S&T CO.,LTD.		
DRAWN					
CHECKED					
APPROVED					