



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

Product Specifications Approval Sheet

Product Description: SAW Filter 763 MHz SMD 3.8X3.8 mm

TST Part No.: TA1130A

Customer Part No.: _____

Customer signature required

Company: _____

Division: _____

Approved by : _____

Date: _____

Checked by: _____ Bob Chau 

Approved by: _____ Francis Chen 

Date: _____ 11, 25, 2009

1. Customer signed back is required before TST can proceed with sample build and receive orders.
2. Orders received without customer signed back will be regarded as agreement on the specifications.
3. Any specifications changes must be approved upon by both parties and a new revision of specifications shall be released to reflect the changes.



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,

Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

SAW Filter 763 MHz

MODEL NO.:TA1130A

REV. NO.:1

A. MAXIMUM RATING:


1. Input Power Level: +5 dBm
2. DC Voltage : 3V
3. Operating Temperature: 10°C to +50°C
4. Storage Temperature: -20°C to +85°C

RoHS Compliant
Lead free
Lead-free soldering

B. ELECTRICAL CHARACTERISTICS:

Item	Unit	Min.	Type.	Max.	Note
Center Frequency Fc	MHz	-	763	-	-
Insertion Loss (758~768 MHz) IL	dB	-	1.3	3	-
Amplitude Ripple (758~768 MHz)	dB	-	0.3	1.5	-
Return Loss (758~768 MHz)	dB	10	15	-	-
Attenuation (Reference level from 0 dB)					
0 ~ 708 MHz	dB	30	41	-	-
788 ~ 798 MHz	dB	52	61	-	-
873 ~ 973 MHz	dB	40	43	-	-
1200 ~ 2000 MHz	dB	25	45	-	-

C.OUTLINE DRAWING:

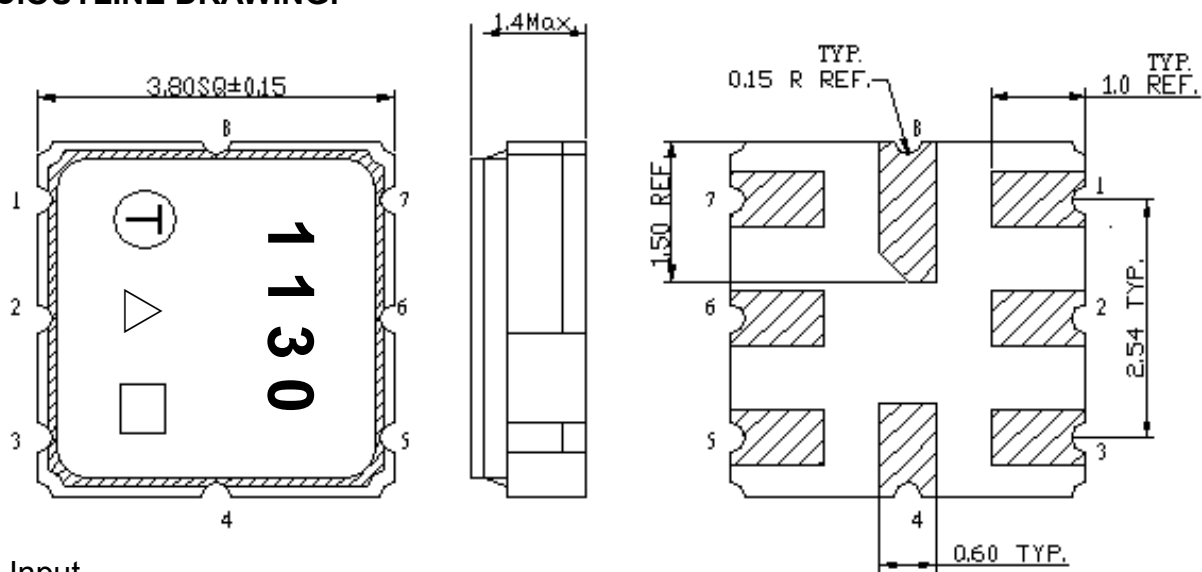

2 : Input

6: Output

1,3,4,5,7,8: Ground

△ : Year Code


□ : Date Code(W01->A, W02->B,...,W27->a,...,W52->z)

Unit: mm


Product Year Code

Year	2009 2013	2010 2014	2011 2015	2012 2016
Product Code	A	a	A	a



D. MEASUREMENT CIRCUIT:

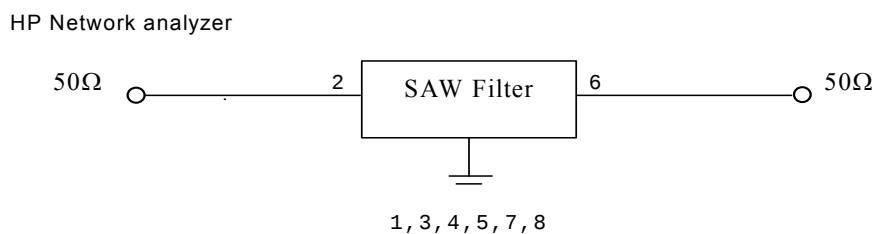

E. PCB Footprint:

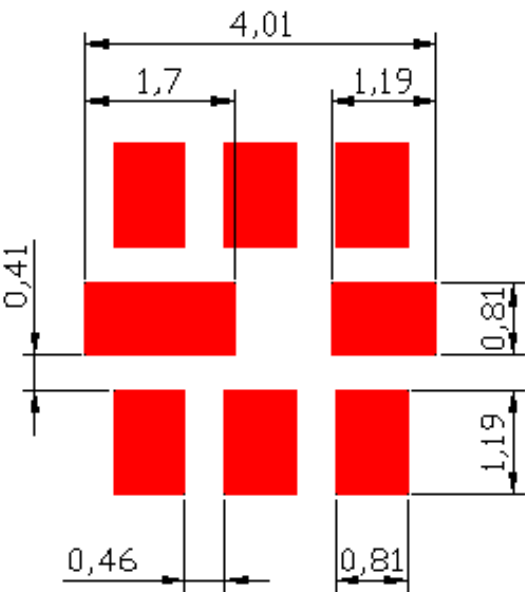


F. Frequency Characteristics :

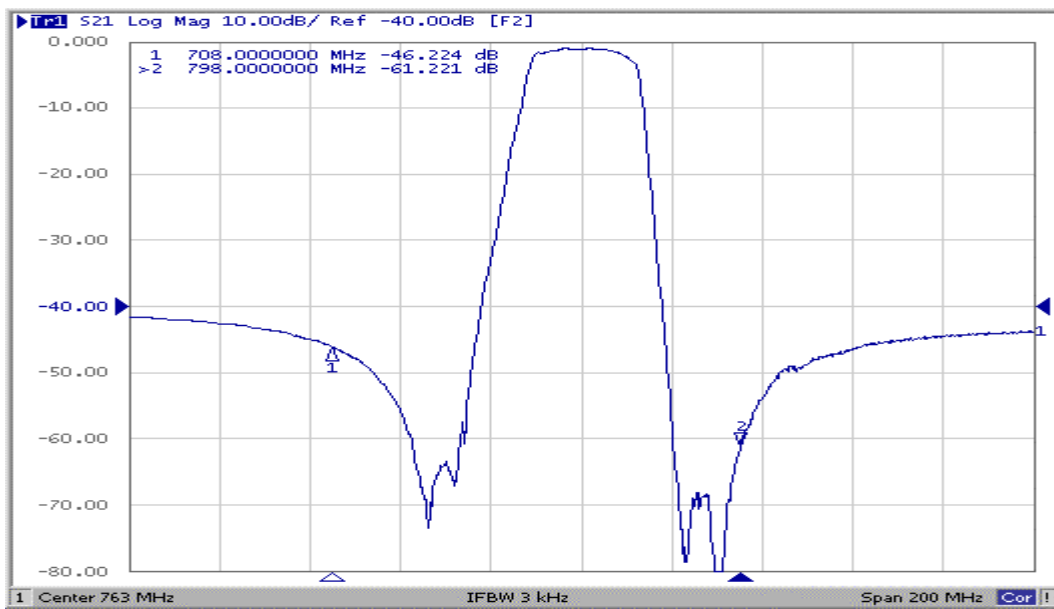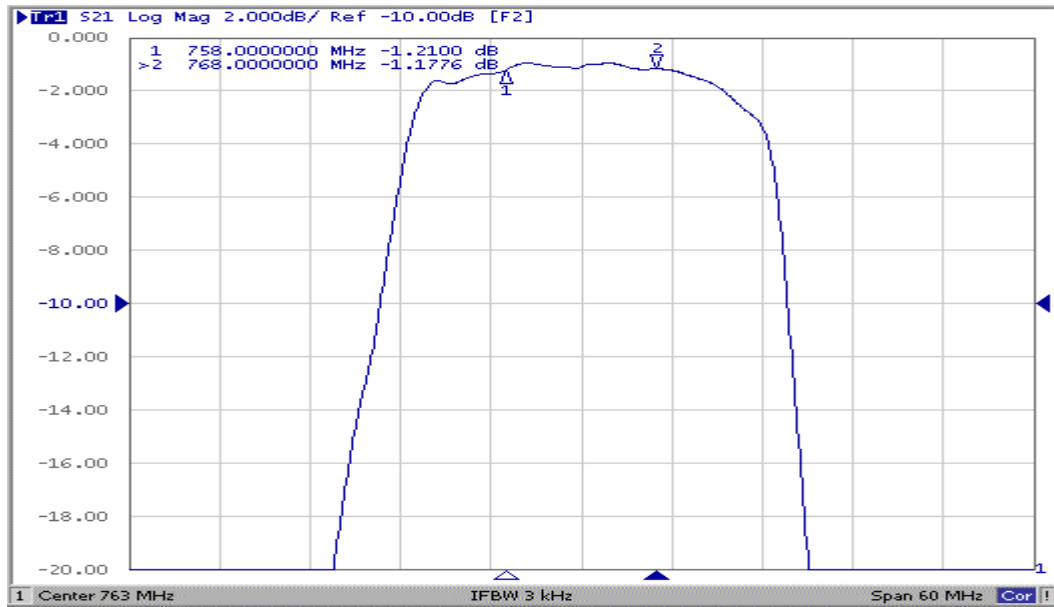


Reflection Functions :

S11

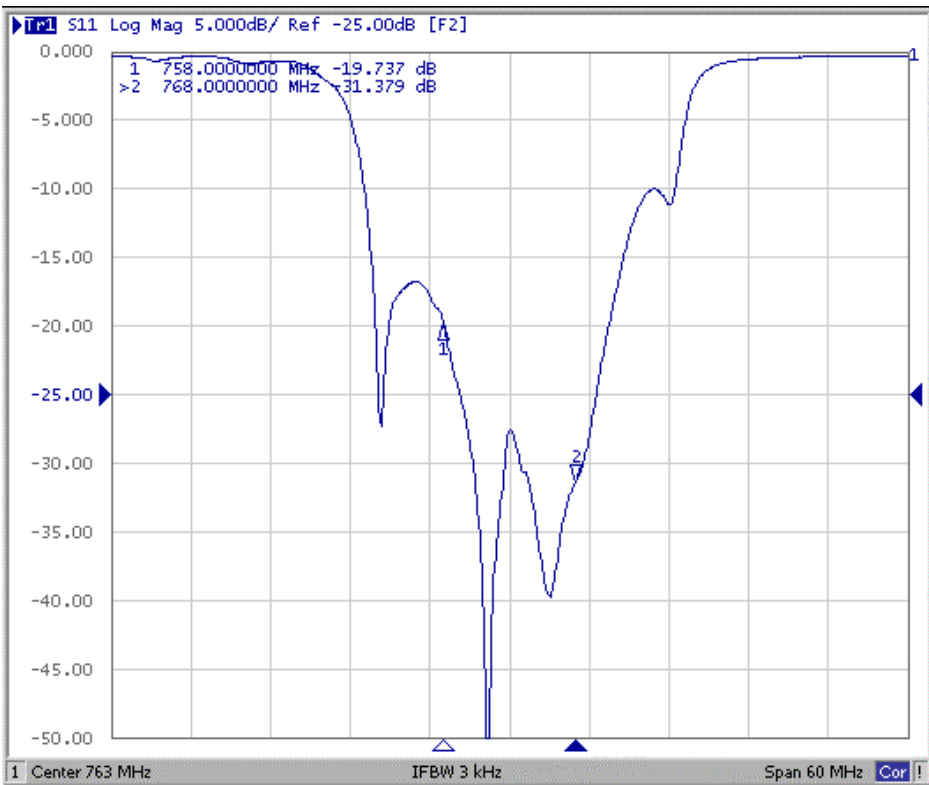


S22

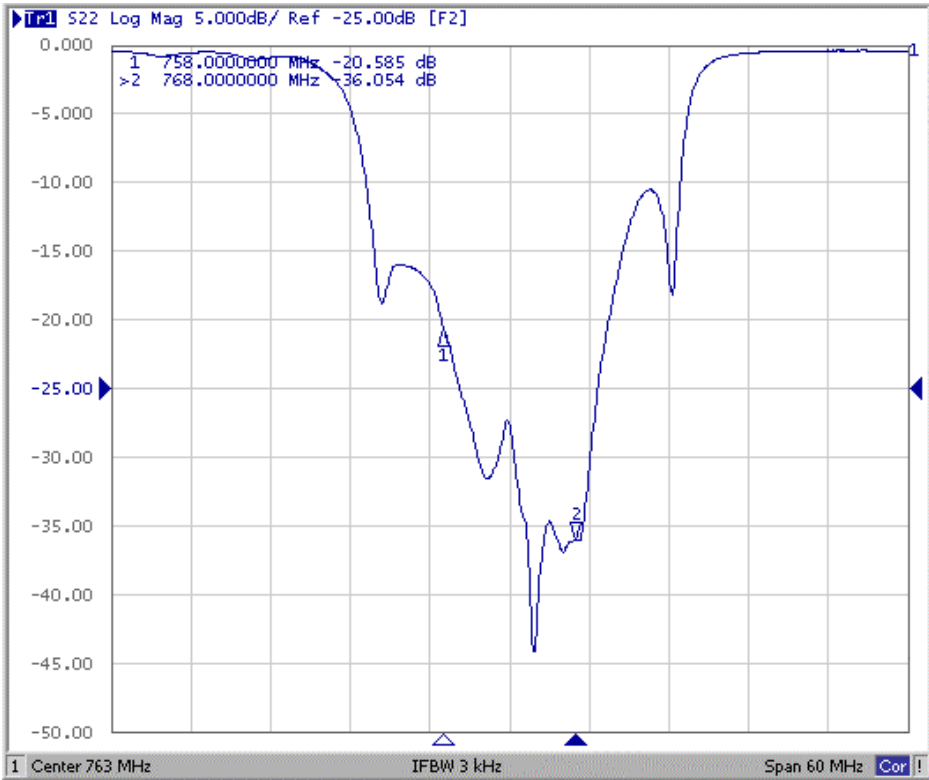


G. PACKING:

1. REEL DIMENSION

(Reel Count : 7"=1000 ; 13"=3000)

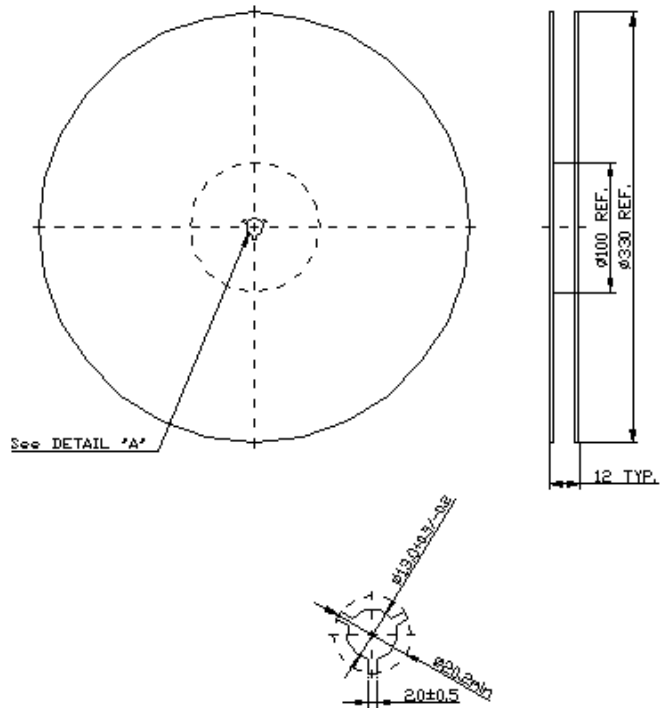

2.TAPE DIMENSION

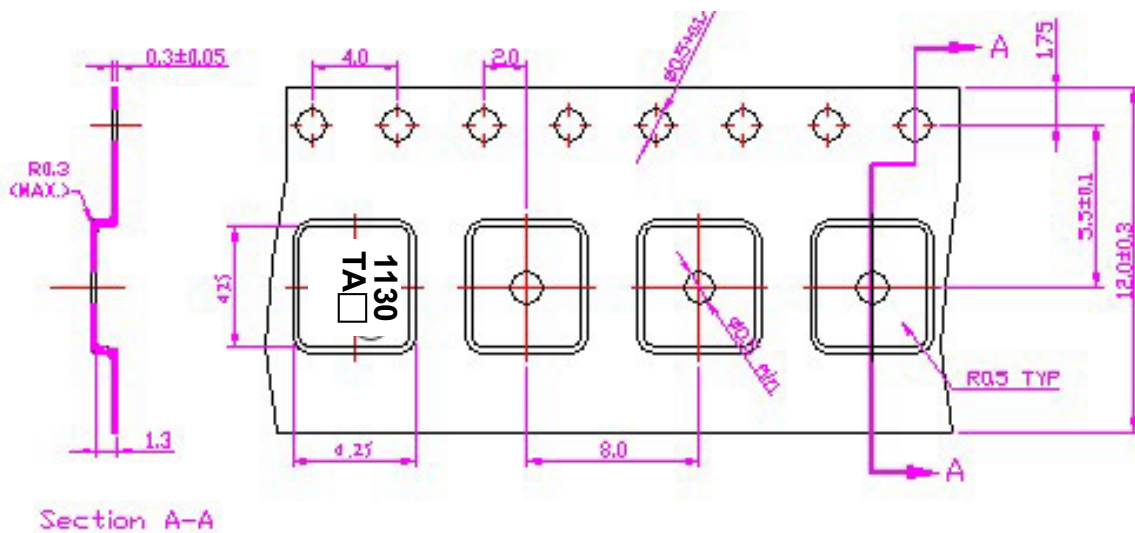

Direction of Feed



H. RECOMMENDED REFLOW PROFILE :

