


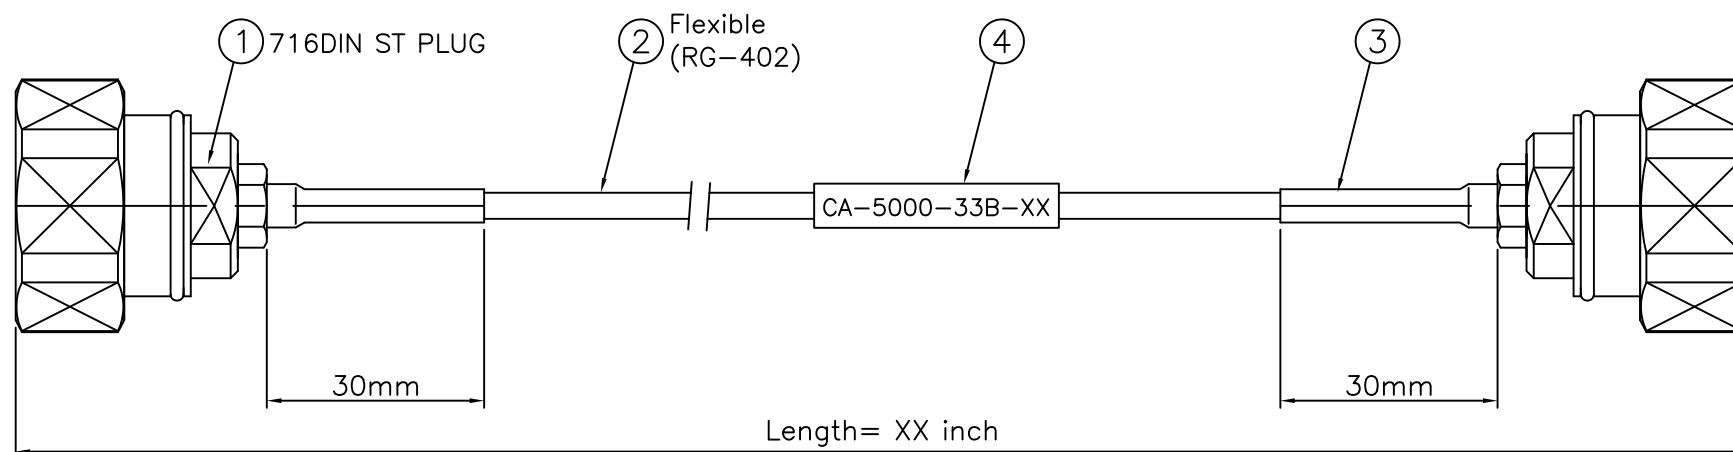

P/N	L (inch)	LOSS(dB)
-05	5	0.2dB
-06	6	0.2dB
-07	7	0.3dB
-08	8	0.3dB
-09	9	0.3dB
-10	10	0.4dB
-11	11	0.4dB
-12	12	0.4dB
-13	13	0.4dB
-14	14	0.5dB

P/N	L (inch)	LOSS(dB)
-15	15	0.5dB
-16	16	0.5dB
-17	17	0.5dB
-18	18	0.6dB
-19	19	0.6dB
-20	20	0.6dB
-22	22	0.7dB
-24	24	0.7dB
-30	30	0.9dB

SPECIFICATIONS

Impedance ; 50ohm

Frequency range ; 500 ~ 3,000 MHz

V.S.W.R ; 1.30:1 max @ 500 ~ 3,000 MHz

Insertion loss ; SEE Table @ 500 ~ 3,000 MHz

PIM ; (2x20w)-156dBc

				Drawn: T. P 4/10/14	Title: CABLE ASSEMBLY 7/16 M-7/16 M, RG402										
				Checked: D. H 4/10/14											
Description	Ecn.No	Date	Rev	Approved: S. K 4/10/14											
 Tel:877-777-8432 www.vidaRF.com				Unless otherwise specified dimensions are in millimeters, dimensions in [] are in inches for customer reference only. Unless Otherwise Specified tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°					Cage Code		Part No: CA-5000-33B-XX				
									6KQ83						
				View:		 		Size:		Scale:		Sheet:		Rev:	
								B4		4:1		1/1		A	