



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

Product Specifications Approval Sheet

Issued Date: Feb, 06, 2012

Product Description: SAW Filter 954.5MHz SMD 3.0X3.0 mm(BW=1MHz)

TST Part No.: TA1458A

Customer Part No.: _____

Customer signature required
Company: _____
Division: _____
Approved by : _____
Date: _____

Checked by: Paul Ni *Paul Ni*

Approved by: Francis Chen *Francis Chen*

Date: 2012/02/06

1. Customer signed back is required before TST can proceed with sample build and receive orders.
2. Orders received without customer signed back will be regarded as agreement on the specifications.
3. Any specifications changes must be approved upon by both parties and a new revision of specifications shall be released to reflect the changes.



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,

Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

SAW Filter 954.5 MHz

MODEL NO.:TA1458A

REV. NO : 1.0

A. MAXIMUM RATING:

1. Input Power Level: 10 dBm
2. DC Voltage : 6V
3. Operating Temperature: -40°C to +85°C
4. Storage Temperature: -40°C to +85°C

RoHS Compliant
Lead free
Lead-free soldering

Electrostatic Sensitive Device



B. ELECTRICAL CHARACTERISTICS:

Item	Unit	Min.	Typ.	Max.
Center frequency Fc	MHz	-	954.5	-
3dB BW	MHz	-	2.15	-
Minimum insertion loss IL(min)				
Exclude loss in matching elements *1)	dB	-	2.6	3.6
Incl. loss of matching elements(Q=90) *2)	dB	-	2.9	3.9
Passband (relative to IL _{min}) *1)				
954.00 ~ 955.00 MHz	dB	-	0.4	3.0
Attenuation (relative to IL _{min}) *1)				
15.000 ~ 870.00 MHz	dB	39	47	-
870.00 ~ 935.00 MHz	dB	36	44	-
935.00 ~ 943.00 MHz	dB	34	41	-
943.00 ~ 952.00 MHz	dB	17	24	-
957.00 ~ 963.00 MHz	dB	10	15	-
963.00 ~ 981.00 MHz	dB	22	28	-
981.00 ~ 1000.0 MHz	dB	36	42	-
1000.0 ~ 2000.0 MHz	dB	38	44	-
2000.0 ~ 2500.0 MHz	dB	55	69	-
Impedance at Fc, Input *1) Z _{in} = R _{in} //C _{in} Z _s	Ω	568Ω//1.12pF		
Impedance at Fc, Output *1) Z _{out} = R _{out} //C _{out} Z _L	Ω	568Ω//1.12pF		

*1) : The matching circuit is ideal by simulation.

*2) : The matching circuit is real by actual passive components.
0805 Coilcraft CS series chip conductor is used for inductor.
0402 muRata GRM series is used for capacitor.


C. Frequency Characteristics :

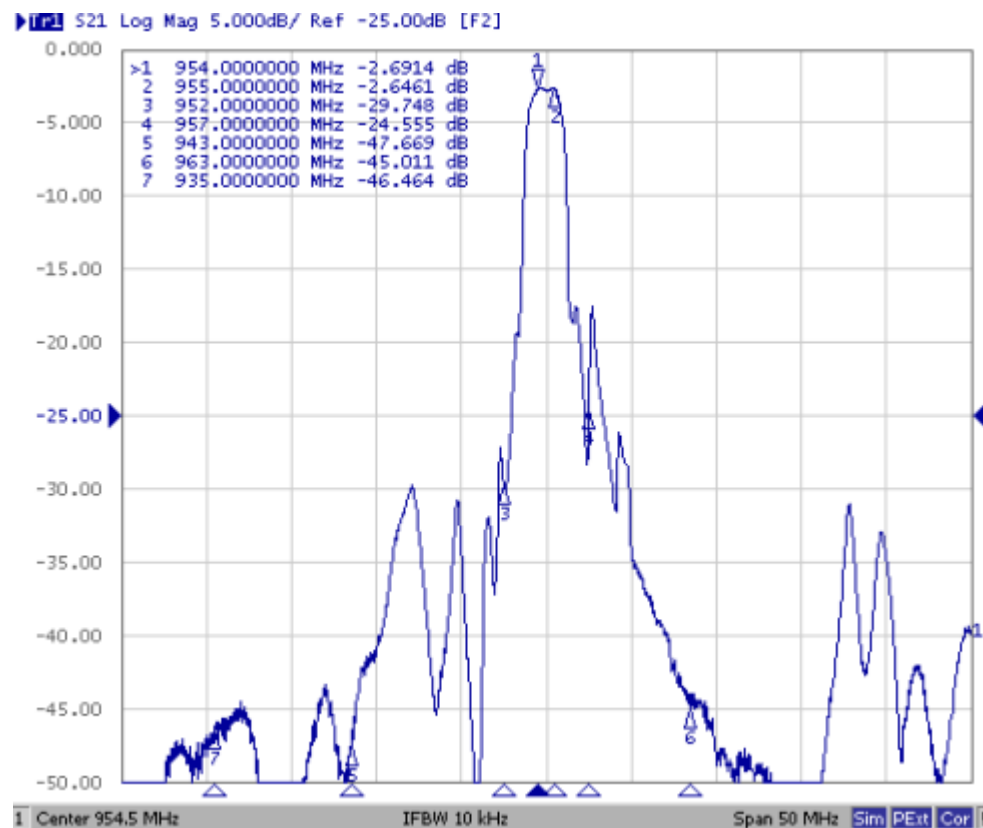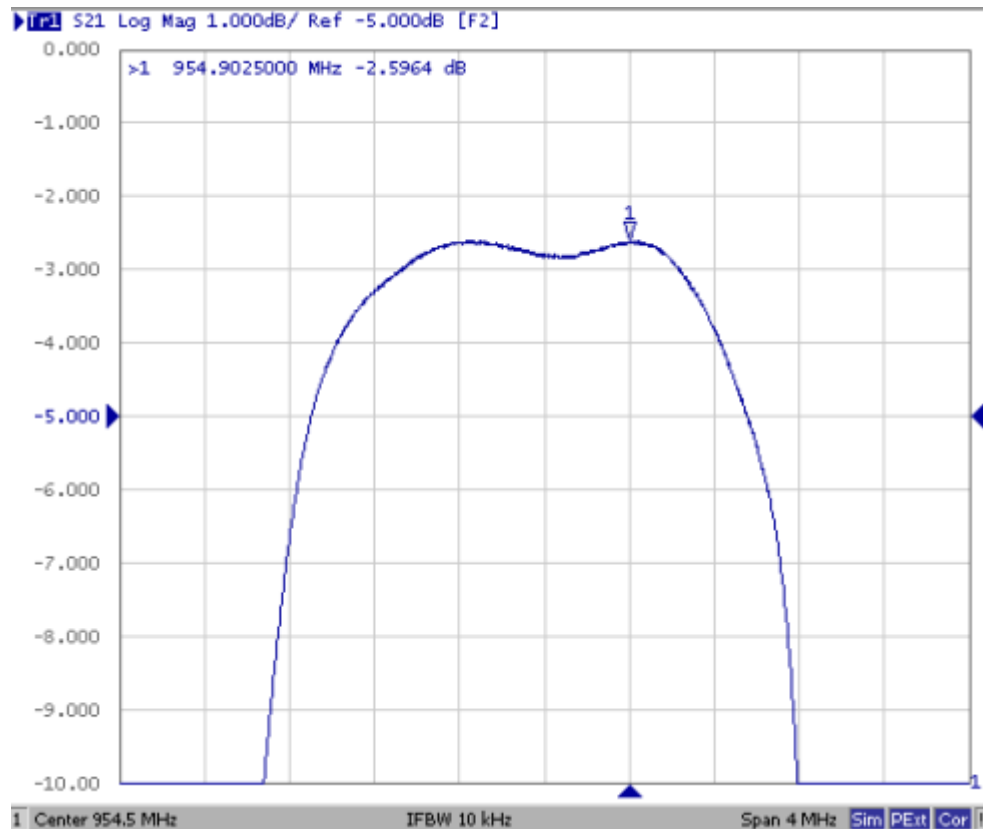



D. MEASUREMENT CIRCUIT:


The matching circuit is ideal by simulation

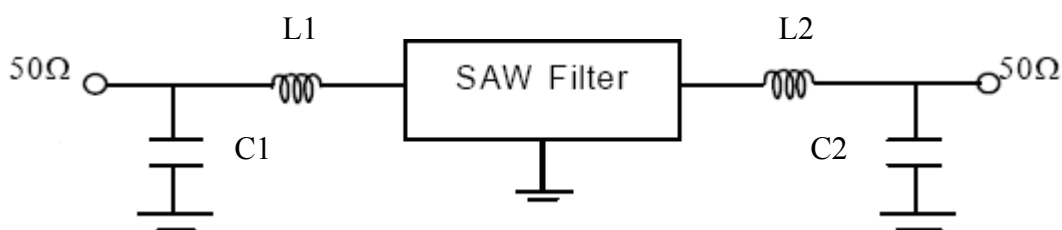

L1 : 27nH , L2 : 27nH (Ideal value)

C1 : 2pF , C2 : 2pF (Ideal value)


E.OUTLINE DRAWING:

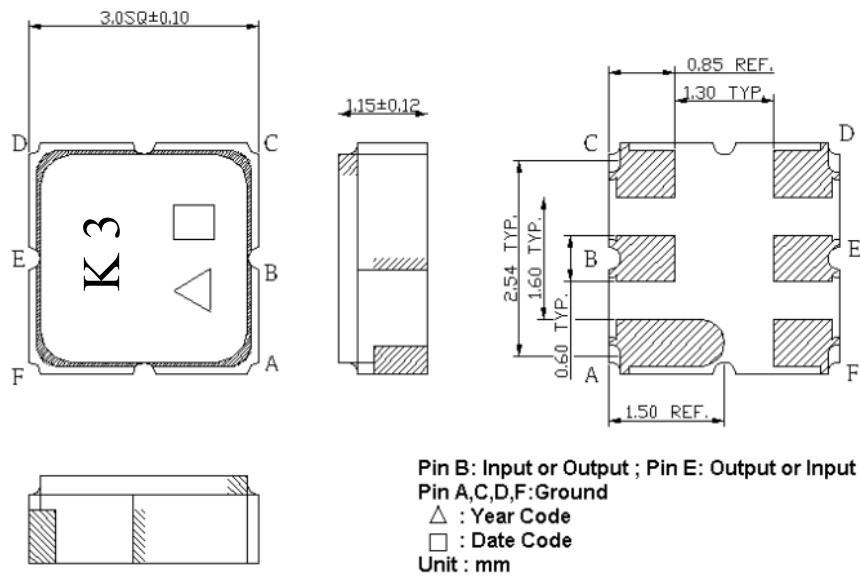

△ : Year Code (2012->2, ..., 2019->9)


□ : Date Code (Follow the table from planner each year)

F. PCB Footprint:

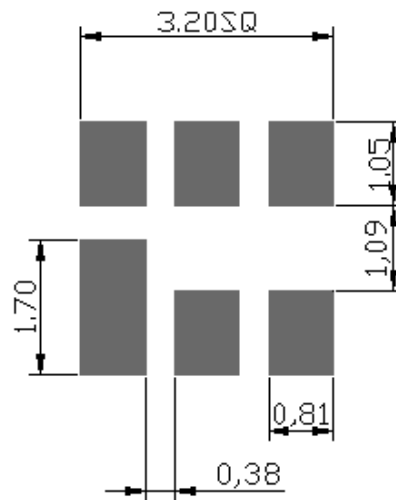


G. PACKING:

1. REEL DIMENSION

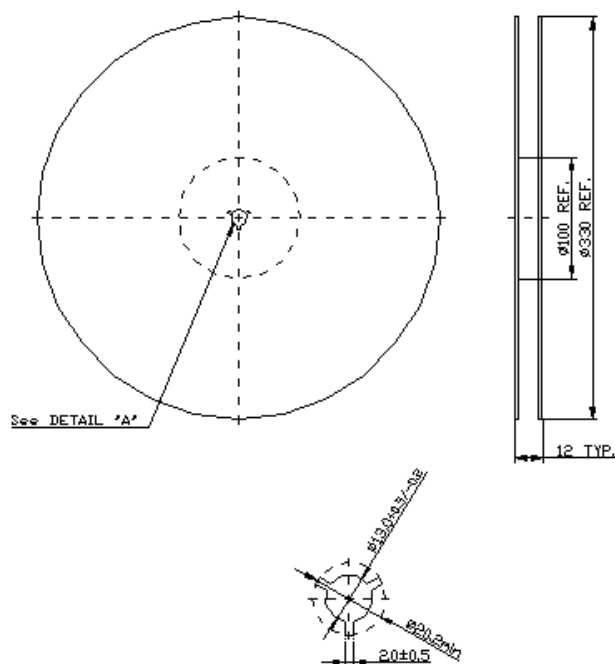

2. TAPE DIMENSION

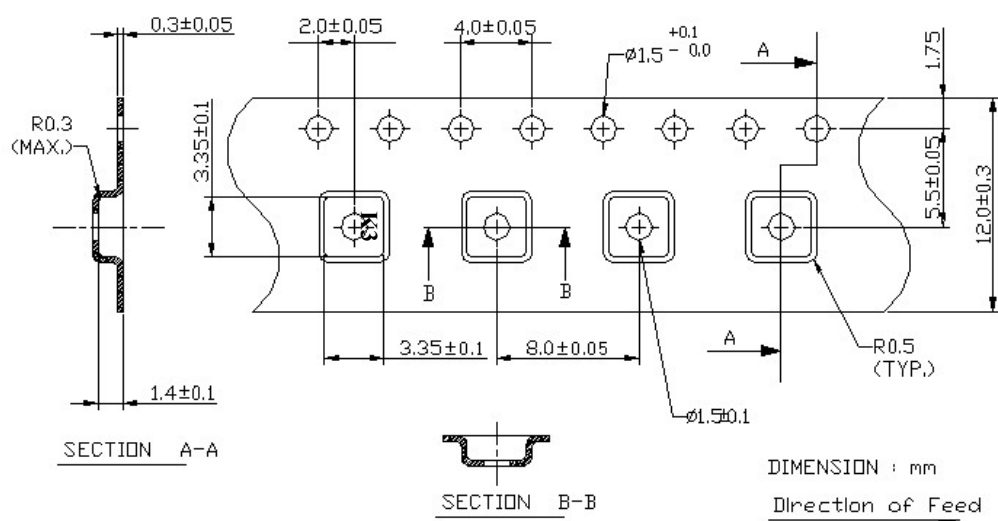

H. RECOMMENDED REFLOW PROFILE :

