

# Type-N/BNC Adaptenuator

50Ω 0.5W 6dB DC to 2000 MHz


## Maximum Ratings

Operating Temperature -55°C to 100°C

Storage Temperature -55°C to 150°C

Permanent damage may occur if any of these limits are exceeded.


## Outline Drawing

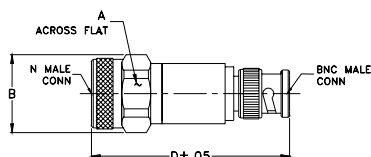

## Outline Dimensions (inch mm)

| A     | B     | D     | wt    |
|-------|-------|-------|-------|
| .812  | .88   | 2.25  | grams |
| 20.62 | 22.35 | 57.15 | 63.8  |

## Electrical Schematic

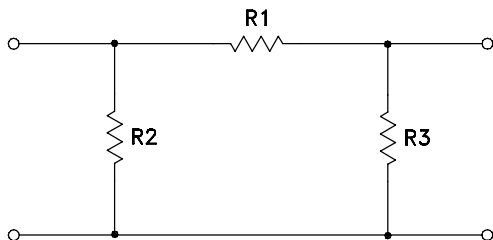

## Features

- improved interface matching
- wideband, DC to 2000 MHz, useable to 4000 MHz
- excellent VSWR, 1.1:1 typ.
- excellent flatness,  $\pm 0.1$  dB typ.
- rugged unibody construction

## Applications

- instrumentation
- provides attenuation and connector type change
- minimizes hardware

NM-BM-6



CASE STYLE: DJ865

| Connectors      | Model             |
|-----------------|-------------------|
| Conn1<br>N-Male | Conn2<br>BNC-Male |
|                 | NM-BM-6           |



## Electrical Specifications

| FREQ.<br>(MHz) | ATTENUATION (dB) |      |      |                |      |                |      | VSWR (:1)     |      |                |      |                |      |     | MAX.<br>INPUT<br>POWER<br>(W) |
|----------------|------------------|------|------|----------------|------|----------------|------|---------------|------|----------------|------|----------------|------|-----|-------------------------------|
|                | Flatness*        |      |      |                |      |                |      |               |      |                |      |                |      |     |                               |
|                | DC-500<br>MHz    |      |      | DC-1000<br>MHz |      | DC-2000<br>MHz |      | DC-500<br>MHz |      | DC-1000<br>MHz |      | DC-2000<br>MHz |      |     |                               |
|                | Nom.             | Typ. | Max. | Typ.           | Max. | Typ.           | Max. | Typ.          | Max. | Typ.           | Max. | Typ.           | Max. |     |                               |
| DC-2000        | 6±0.3            | 0.05 | 0.15 | 0.15           | 0.25 | 0.20           | 0.25 | 1.1           | 1.2  | 1.1            | 1.2  | 1.2            | 1.25 | 0.5 |                               |

\*Flatness defined as peak to peak attenuation over band divided by 2.

## Typical Performance Data

| FREQUENCY<br>(MHz) | ATTENUATION<br>(dB) | VSWR<br>(:1) |        |
|--------------------|---------------------|--------------|--------|
|                    |                     | BNC-Male     | N-Male |
| 1.00               | 5.99                | 1.00         | 1.00   |
| 5.00               | 5.98                | 1.00         | 1.00   |
| 10.00              | 5.98                | 1.00         | 1.00   |
| 50.00              | 5.99                | 1.00         | 1.01   |
| 100.00             | 6.01                | 1.01         | 1.01   |
| 500.00             | 6.05                | 1.03         | 1.04   |
| 1000.00            | 6.08                | 1.06         | 1.06   |
| 1500.00            | 6.12                | 1.07         | 1.08   |
| 1700.00            | 6.13                | 1.06         | 1.08   |
| 2000.00            | 6.16                | 1.05         | 1.06   |

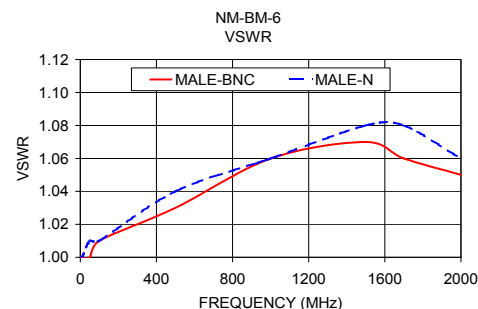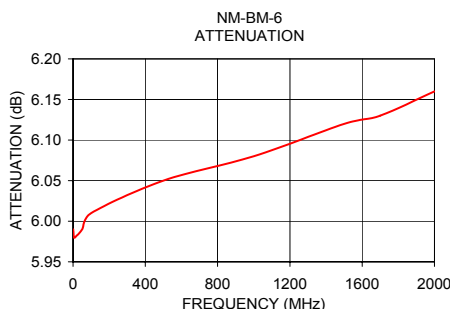

## Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/VCLStore/terms.jsp](http://www.minicircuits.com/VCLStore/terms.jsp)



[www.minicircuits.com](http://www.minicircuits.com) P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. C  
M151107  
EE-9890  
NM-BM-6  
URJ/TD/CP/AM  
150911  
Page 1 of 1