


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

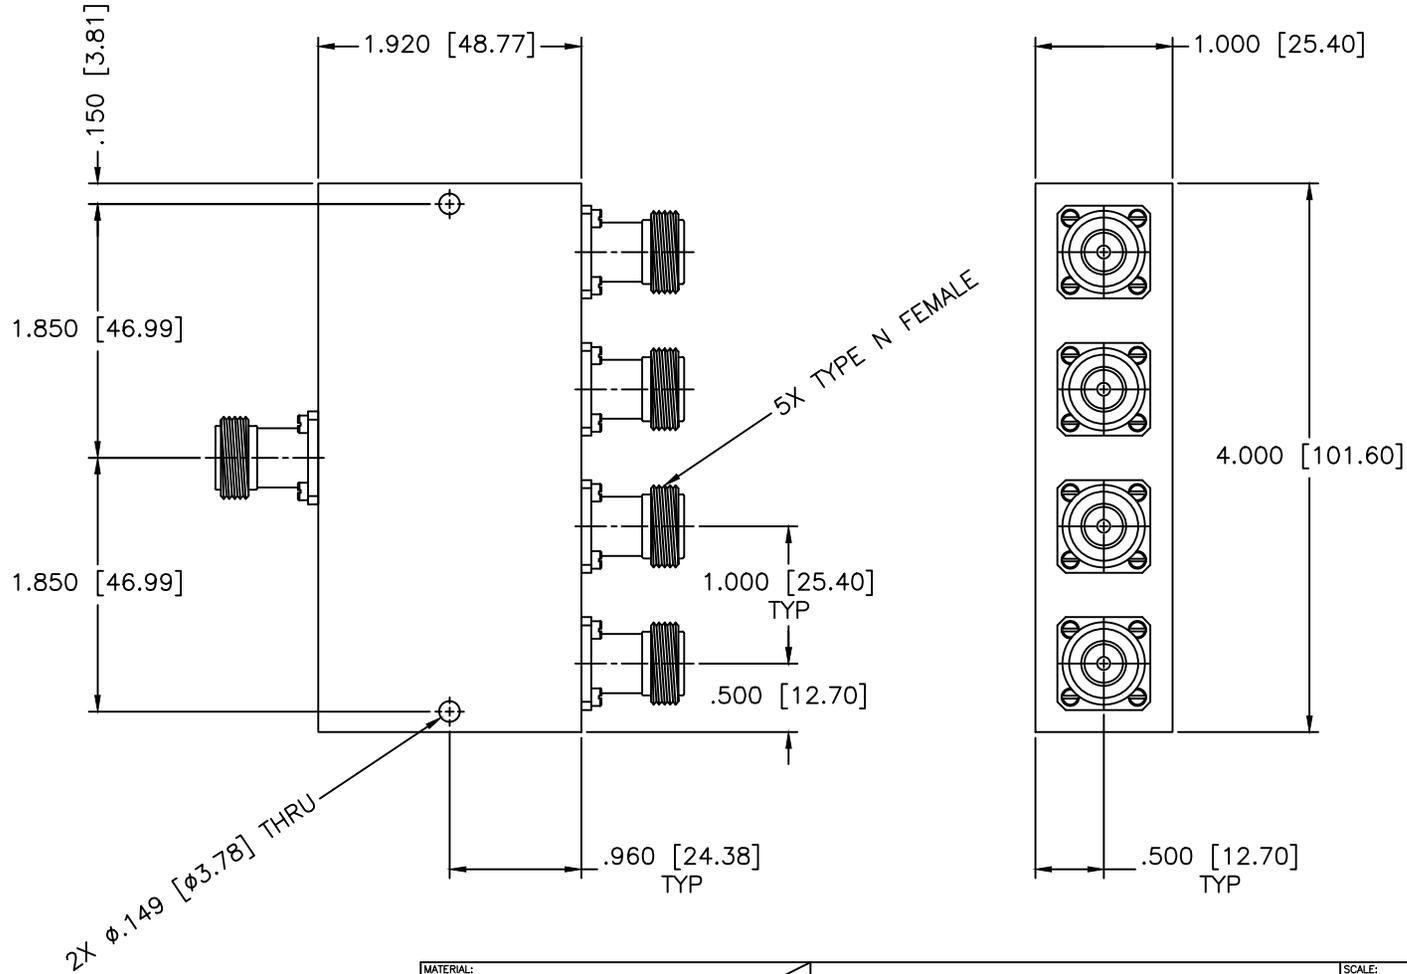

SPECIFICATIONS

Frequency Range: 0.8–3 GHz
 Insertion Loss: 1.0dB Max.
 Isolation: 17dB Min.
 VSWR In/Out: 1.55:1/1.45:1 Max.
 Power: 20W CW
 Amplitude Balance: ±0.5dB Max.
 Phase Balance: ±8 Deg. Max.

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
					SHEET: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°	DRAWING TITLE: 4-WAY POWER DIVIDER		
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	PART NO. PS4-155/NF		
DRAWN: Paiboon Luekhamhan DATE: 05-18-2005	APPROVED: T. Nguyen DATE: 05-18-2005	THIRD ANGLE PROJECTION 	CAGE CODE: OD2L5	SIZE: A REV: N/A	DWG NO. 32333
				DO NOT SCALE THE DRAWING	