

| MECHANICAL CHARACTERISTICS | |
|--|---------------------------|
| INTERFACE | MIL-STD-348, FIGURE 310-1 |
| IN ACCORDANCE WITH THE INTENT OF SLANT SHEET | MIL-PRF-39012/55 REF. |
| RECOMMENDED MATING TORQUE | 9 IN-LBS. NOM. |
| COUPLING PROOF TORQUE | 15 IN-LBS. MIN. |
| COUPLING NUT RETENTION | 60 LBS. MIN. |
| FORCE TO ENGAGE | 2 IN-LBS. MAX. |
| FORCE TO DISENGAGE | 2 IN-LBS. MIN. |
| DURABILITY | 500 CYCLES MIN. |
| AXIAL CONTACT RETENTION (FROM INTERFACE) | 6 LBS. MIN. |
| AXIAL CONTACT RETENTION (FROM CABLE) | 6 LBS. MIN. |
| CENTER CONTACT INSERTION (FROM CABLE) | 3 LBS. MAX |
| CENTER CONTACT WITHDRAW (FROM CABLE) | 1 OZ. MIN. |
| CABLE RETENTION | 10 LBS. MIN. |
| MASS | 2.46 GRAMS NOM. |
| | |

ELECTRICAL CHARACTERISTICS

| | |
|---------------------------------|-------------------------------|
| IMPEDANCE | 50 Ohms NOM. |
| MAXIMUM FREQUENCY | 24.5 GHz |
| VSWR DC - 18 GHz | 1.16:1 MAX. |
| 18 - 24.5 GHz | 1.20:1 MAX. |
| INSERTION LOSS | 0.03 \sqrt{f} (GHz) dB MAX. |
| DIELECTRIC WITHSTANDING VOLTAGE | 1200 Vrms MIN. |
| INSULATION RESISTANCE | 5000 MegaOhms MIN. |
| RF LEAKAGE DC - 18 GHz | -90 dB MIN. |
| CORONA | 300 Vrms MIN. @ 70,000 FEET |
| RF HIGH POTENTIAL | 800 Vrms MIN. |
| CONTACT RESISTANCE (INNER) | 3.0 MilliOhms MAX. |
| CONTACT RESISTANCE (OUTER) | 2.0 MilliOhms MAX. |
| | |

ENVIRONMENTAL CHARACTERISTICS

| | |
|-----------------------|--|
| OPERATING TEMPERATURE | -28°C TO 165°C |
| VIBRATION | MIL-STD-202, METHOD 204, CONDITION D |
| MECHANICAL SHOCK | MIL-STD-202, METHOD 213, CONDITION I |
| THERMAL SHOCK | MIL-STD-202, METHOD 107, CONDITION B |
| CORROSION | MIL-STD-202, METHOD 101, CONDITION B, 5% |
| MOISTURE RESISTANCE | MIL-STD-202, METHOD 106, (NO VIBRATION) |
| | |

MATERIALS AND FINISH



| | |
|--------------|--|
| COUPLING NUT | STEEL, CORROSION RESISTANT, PER ASTM-A-582, UNS NO. S30300, PASSIVATE PER ASTM-A-967 |
| CONTACT | BERYLLIUM COPPER, ASTM-B-196, GOLD PLATED PER MIL-DTL-45204, OVER NICKEL PLATE PER AMS-QQ-N-290 |
| SNAP RING | BERYLLIUM COPPER, PER ASTM-B-197 |
| INSULATOR | TFE FLUOROCARBON PER ASTM-D-1710 |
| GASKET | FLUORCARBON ELASTOMER, (VITON) PER AMS-R-83485 |
| BODY | STEEL, CORROSION RESISTANT, PER ASTM-A-582, UNS NO. S30300, GOLD PLATE PER MIL-DTL-45204, OVER NICKEL PLATE PER AMS-QQ-N-290 |
| | |

APPLICATION

| | |
|--------------|-------------------|
| CABLE(S) | 142A SERIES CABLE |
| INSTALLATION | PER CONFIGURATOR |

THIS DRAWING IS PROPRIETARY AND CONFIDENTIAL.

| REV. | DESCRIPTION | DATE | BY | APPVD |
|------|---------------------|------------|-----|-------|
| 1 | PRELIMINARY RELEASE | 12/16/2008 | MJM | RS |

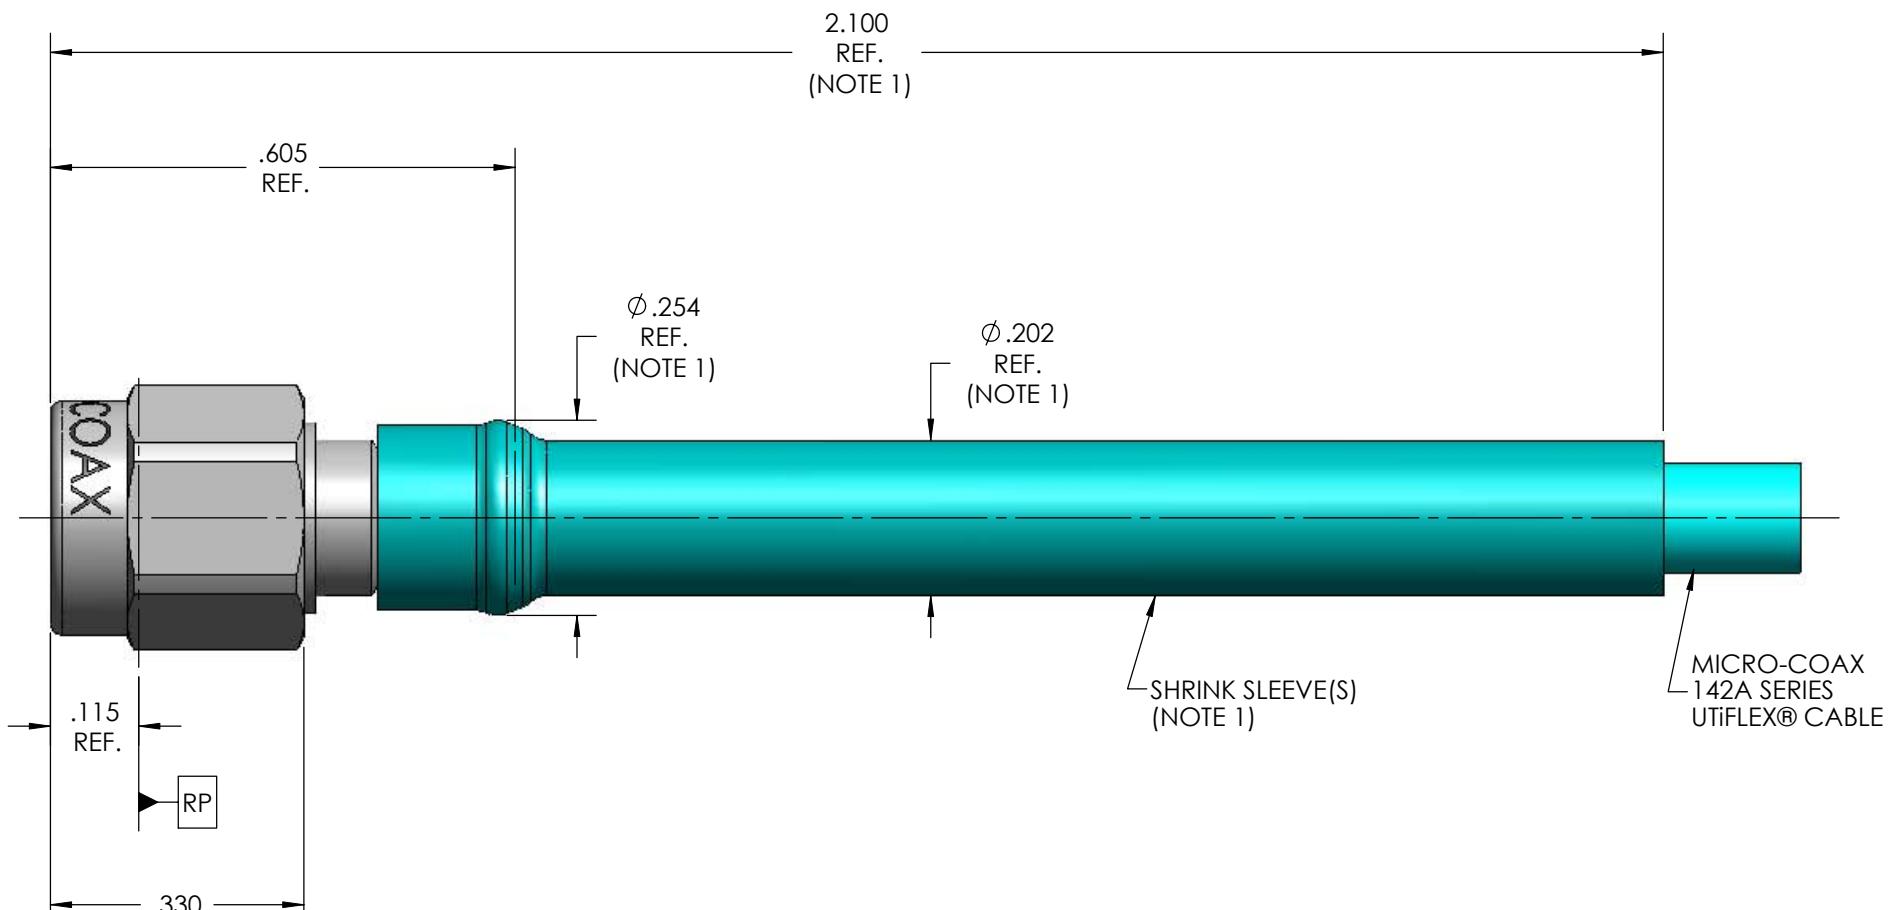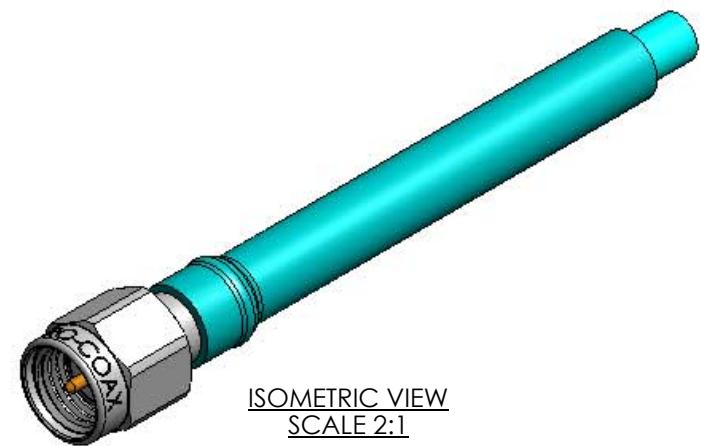

NOTE:

1. MARKER LOCATION ON THIS DRAWING IS FOR REFERENCE ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE.

| | | |
|---|----------|--|
| THIS SPECIFICATION IS THE PROPERTY OF MICRO-COAX, INC. AND MAY NOT BE USED OR COPIED WITHOUT THE EXPRESS WRITTEN PERMISSION OF MICRO-COAX, INC. | INITIALS | DATE |
| | DWN. MJM | 12/16/08 |
| | CHKD. | |
| | APPVD. | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED | TITLE | |
| .XX | ± .02 | SMA PLUG, DIRECT SOLDER, VITON, 142A SERIES |
| XXX | ± .005 | ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED. |
| XXXX | ± .0010 | SCREW THDS. TO BE IN ACCORD WITH ANSI B1.1-1989. |
| ANGLES | ± 2° | FSCM NO. 64639 |
| | | SIZE B |
| | | SCALE 4:1 |
| | | SHEET NO. 1 OF 1 |
| | | DRAWING NO. SD904513 |
| | | REV. 1 |

MICRO-COAX®

Leading the way in transmission line solutions.

Copyright Micro-Coax, Inc.

SPECIFICATION DRAWING