


1.0 PERFORMANCE
 1.1 FREQUENCY RANGE: DC-11 GHz
 1.2 VOLTAGE RATING: 500Vrms (sea level)
 1.3 NOMINAL IMPEDANCE: 50 OHMS
 1.4 DWV: 1000 Vrms, 60 Hz (sea level)
 1.5 TEMPERATURE RANGE: -65 / +165°C

2.0 MATERIALS
 2.1 SOCKET CONTACT: BeCu
 2.2 DIELECTRIC: PTFE
 2.3 RETAINING RING: PHOSPHOR BRONZE
 2.4 ALL OTHER METAL PARTS: BRASS
 2.5 GASKET: SILICONE RUBBER
 3.0 FINISHES: SEE TABLE

4.0 MECHANICAL
 4.1 CONTACT RETENTION: 6 LBS MIN
 4.2 INTERFACES PER MIL-STD-348

DWG NO.	OL-0410-41-1		REV.	A
PART NUMBER	BODY	CONTACT		
0410-41-AG	ALBALOY	GOLD/Cu		

PLATING PER SAN-TRON SPEC. 7.3.1-8

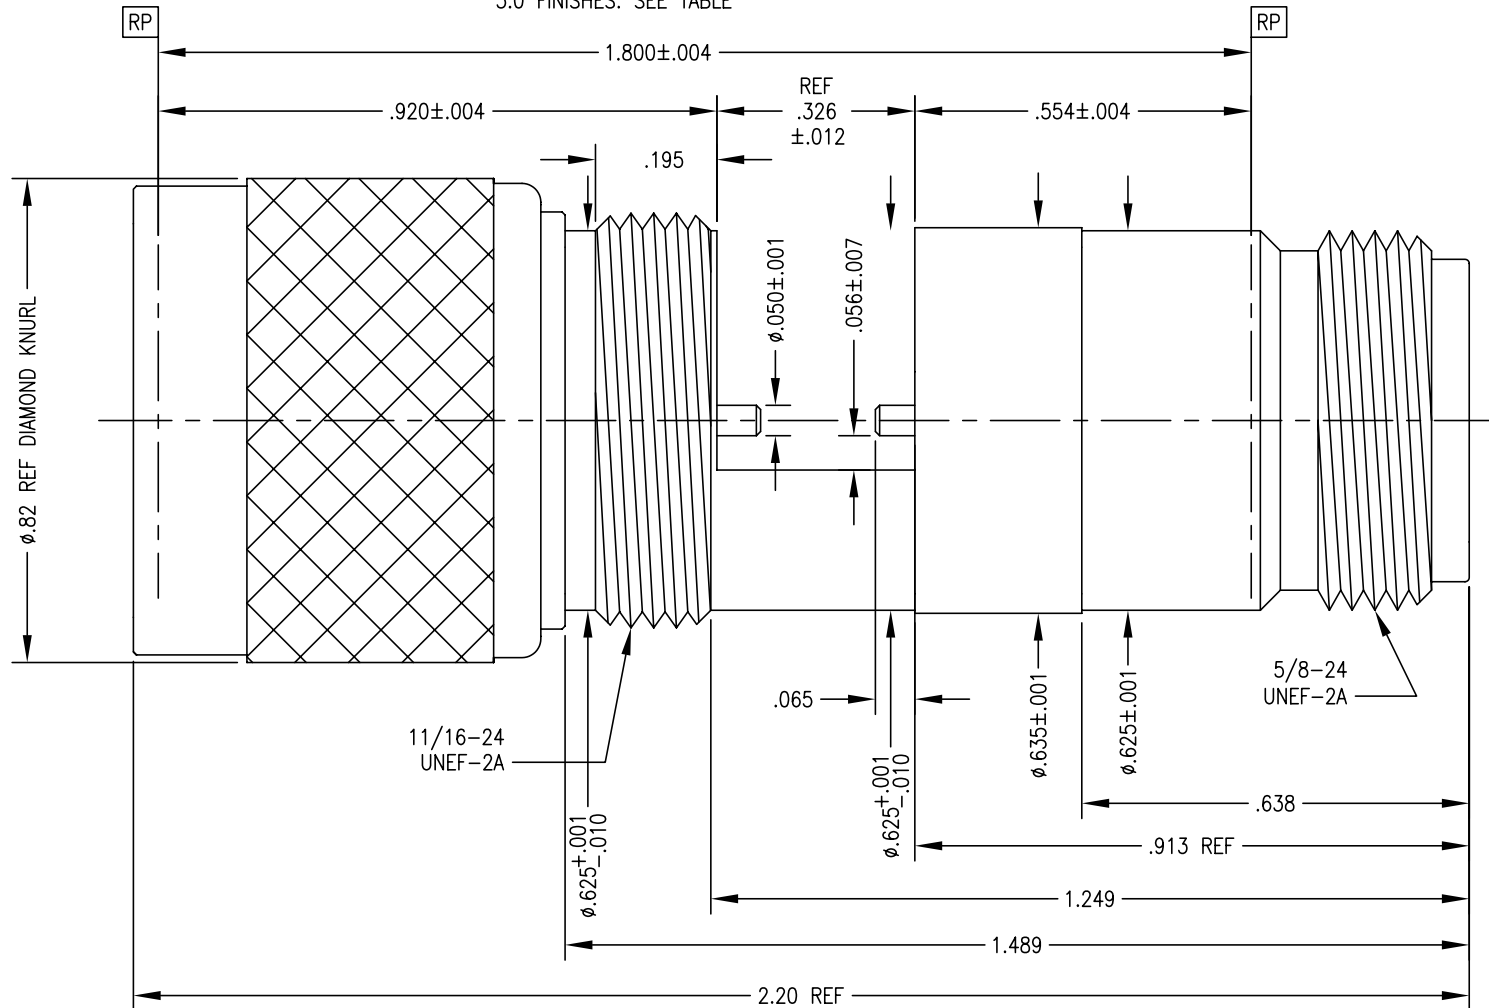

				THIS DRAWING CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO SAN-TRON, INC. IT MUST NOT BE REPRODUCED OR DISCLOSED TO OTHERS OR USED IN ANY OTHER WAY, IN WHOLE OR PART EXCEPT AS AUTHORIZED IN WRITING BY SAN-TRON, INC.				 SAN-TRON, INC. 4 NEWBURYPORT TPK. IPSWICH MA USA 01938 TEL: 978 - 356 -1585 FAX: 978 - 356 -1573 WWW.santron.com E MAIL: santron@santron.com			
				UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS ARE IN INCHES. ALL DIMENSIONS ARE AFTER PLATING. .XXX= ±.005 ALL MACHINED SURFACES $\sqrt{3}$ MAX. .XX= ±.01 ANG. ±1/2° FRACTIONAL= ±1/64 ◎.004 MAX. TIR. ⊥ AXIS .001				TITLE N, ATTENUATOR HOUSING N-A-S			
A ORIGINAL				NEW 3/9/06				MATERIAL:			
Rev. Revisions				Disp. Date Dwn. Appd.				FINISH: SEE TABLE- ALLOW FOR .0002/.0004 PLATING			
Ref.: SK-050505-1				REMOVE ALL BURRS AND SHARP EDGES .005 MAX.				CAGE CODE: 50896			
				INTERPRET PER ASME Y14.5M-1994				DWG NO. OL-0410-41-1			
				THIRD ANGLE PROJECTION				SCALE X:X			
				DWN FSH 3/2/06				REV. A			
				CHKD SJS 3/8/06							
				APPR FSH 3/9/06							