
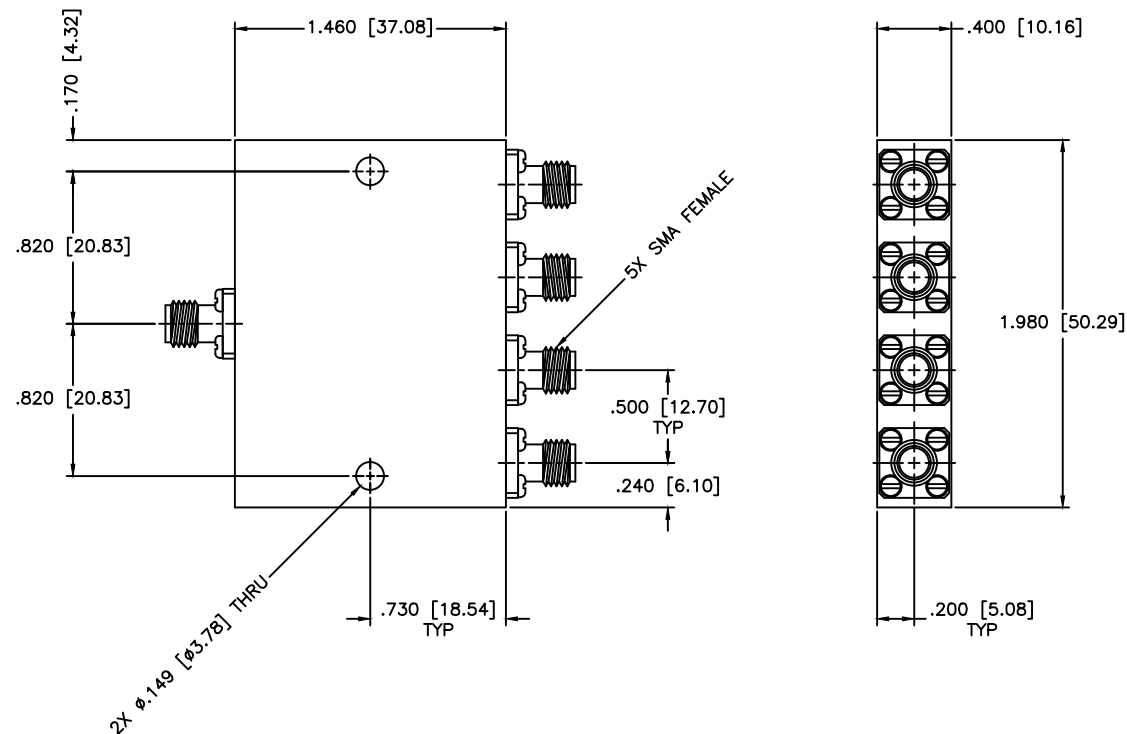


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED



SPECIFICATIONS

Frequency Range: 10–15 GHz
 Insertion Loss: 1.6dB Max.
 Isolation: 15dB Min.
 VSWR: 1.50:1 Max.
 Amplitude Balance: ± 0.35 dB Max.
 Phase Balance: ± 6 Deg. Max.
 Power: 30W (vswr@1.2)

MATERIAL:		 MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
				SHEET: N/A	
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE:	
				4-WAY POWER DIVIDER	
				PART NO.	
				PS4-88	
DRAWN:	DATE:	PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR REPRODUCED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		CAGE CODE:	SIZE:
Paiboon Luekhamhan	06-16-1999				A
APPROVED:	DATE:	THIRD ANGLE PROJECTION			REV:
T. Nguyen	06-16-1999			OD2L5	N/A
				DO NOT SCALE THE DRAWING	
				DWG NO. 81317	