



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

1230 MHz Ceramic Bandpass Filter

Part Number: AM1230B1264



Electrical specifications

Center Frequency: 1230 MHz

Bandwidth: F0 $\pm$ 60 MHz

VSWR: 1.5 : 1

Input / Output Impedance: 50 Ohms

Passband Insertion Loss: 1.0 dB max

Passband Ripple: 1.0 dB max

Rejection: 20dBc min @ 1060 MHz

Rejection 2: 20dBc min @ 1400 MHz

Power Handling: 1 W max

Mechanical

Mounting Method: SMT

Dimensions: 13.5 x 10 x 4.5 mm


Environmental

Operating Temperature: -30°C to +70°C

Storage Temperature: -50°C to +90°C

This product is RoHs compliant.

Outline Drawing:

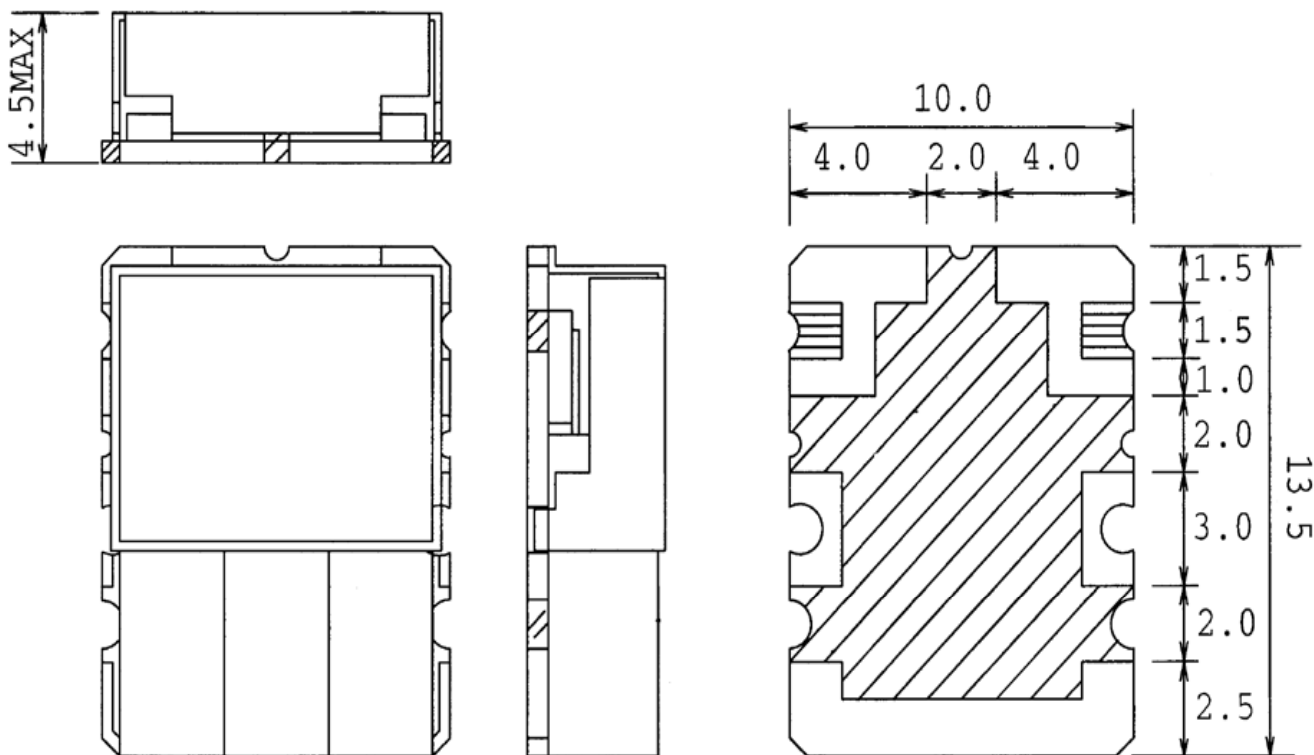

TOLERANCE UNLESS SPECIFIED: ± 0.3



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

1230 MHz Ceramic Bandpass Filter

Part Number: AM1230B1264



Response Plot:

