


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

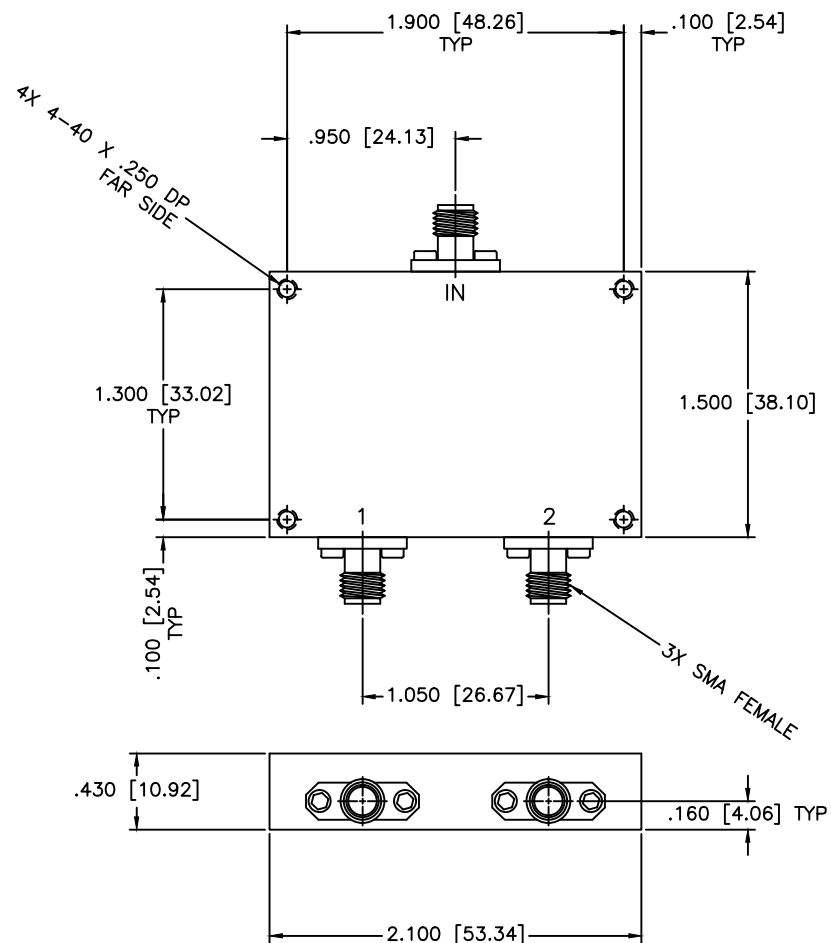

SPECIFICATIONS

Frequency Range: 1020–1040 MHz
 Insertion Loss: 0.25dB Max.
 Isolation: 18dB Min.
 Phase Balance: ± 5 Deg. Max.
 Amplitude Balance: ± 0.1 dB Max.
 VSWR: 1.25:1 Max.
 Input Power: 200 W CW

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: ± 0.01 ± 0.005 ANGLE: $\pm 1/2^\circ$		SHEET: N/A
DRAWING TITLE:		2-WAY POWER DIVIDER		
PART NO.		PLH2-45		
DRAWN: Paiboon Luekhamhan	DATE: 02-02-2011	PROPERTY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		
APPROVED: T. Nguyen	DATE: 02-02-2011	CAGE CODE: OD2L5	SIZE: A	REV: N/A
		DO NOT SCALE THE DRAWING		
		DWG NO. 85307		