


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

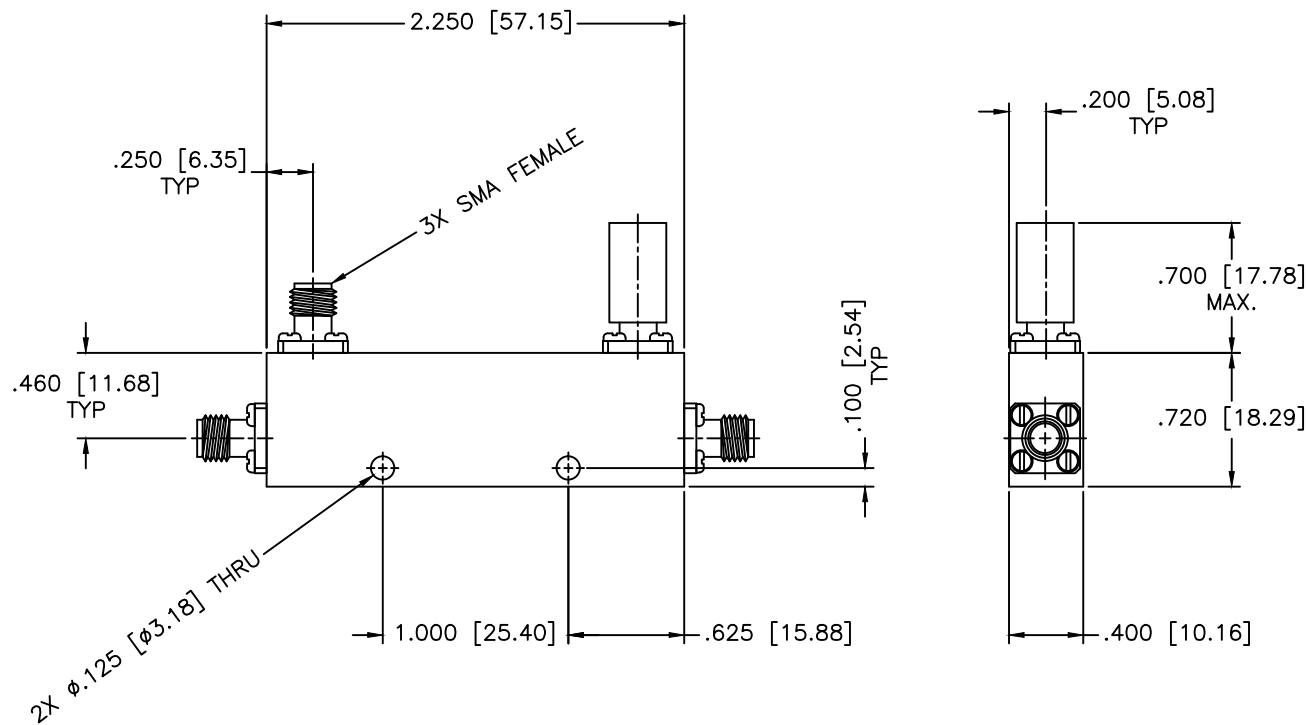

SPECIFICATIONS

Frequency Range: 2–26.5 GHz
Coupling: 16±1.0dB
Frequency Sensitivity: ±0.6dB
Insertion Loss: 1.0dB Max.
Directivity: 14dB Min.
VSWR: 1.45:1 Max.
Power Incident, Reflected: 50W, 10W, 3kW Peak

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: DIRECTIONAL COUPLER		SHEET: N/A
DRAWN: Paitoon Luethamhan		DATE: 08-04-2009		PART NO. CB43-16
APPROVED: T. Nguyen		DATE: 08-04-2009		
THIRD ANGLE PROJECTION		CAGE CODE: OD2L5	SIZE: A	REV: N/A
		DO NOT SCALE THE DRAWING		DWG NO. 84572