

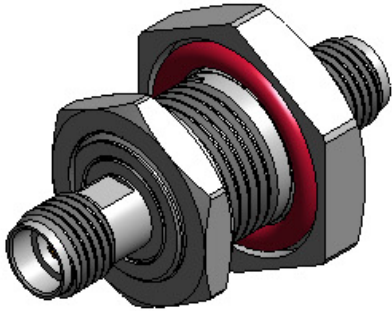


MECHANICAL CHARACTERISTICS	
INTERFACE	IEC 60169-23
IN ACCORDANCE WITH THE INTENT OF SLANT SHEET	N/A
RECOMMENDED MATING TORQUE (CONNECTORS)	9 IN-LBS. NOM.
PANEL MOUNTING TORQUE	20 IN-LBS. MAX.
FORCE TO ENGAGE	2 IN-LBS. MAX.
FORCE TO DISENGAGE	2 IN-LBS. MIN.
DURABILITY	500 CYCLES MIN.
AXIAL CONTACT RETENTION (FROM INTERFACE)	6 LBS. MAX.
MASS	MASS= 16.60 GRAMS
ELECTRICAL CHARACTERISTICS	
IMPEDANCE	50 Ohms NOM.
MAXIMUM FREQUENCY	34 GHz
VSWR DC - 26.5 GHz	1.16:1 MAX.
26.5 GHz - 34 GHz	1.30:1 MAX.
INSERTION LOSS	0.045 √F (GHz) dB MAX.
DIELECTRIC WITHSTANDING VOLTAGE	1100 Vrms MIN.
INSULATION RESISTANCE	5000 MegaOhms MIN.
RF LEAKAGE DC - 18 GHz	-90 dB MIN.
CORONA	280 Vrms MIN. @ 70,000 FEET
RF HIGH POTENTIAL	725 Vrms MIN.
CONTACT RESISTANCE (INNER)	6.0 MilliOhms MAX.
CONTACT RESISTANCE (OUTER)	2.0 MilliOhms MAX.
ENVIRONMENTAL CHARACTERISTICS	
OPERATING TEMPERATURE	-65°C TO 165°C
VIBRATION	MIL-STD-202, METHOD 204, CONDITION D 20 Gs
MECHANICAL SHOCK	MIL-STD-202, METHOD 213, CONDITION I 10 Gs
THERMAL SHOCK	MIL-STD-202, METHOD 107, CONDITION B
MOISTURE RESISTANCE	MIL-STD-202, METHOD 106, CONDITION (NO VIBRATION)
CORROSION	MIL-STD-202, METHOD 101, CONDITION B, 5%
MATERIALS AND FINISH	
CONTACT(S) & BULLET	BERYLLIUM COPPER PER ASTM-B-196, GOLD PLATE PER MIL-DTL- 45204, OVER NICKEL PLATE PER AMS-QQ-N-290.
MAIN BODY & FORWARD BODIES	STEEL, CORROSION RESISTANT, PER ASTM-A-582, UNS NO. S30300, GOLD PLATE PER MIL-DTL-45204 OVER NICKEL PLATE PER AMS-QQ-N-290
BEAD(S)	POLYETHERIMIDE THERMOPLASTIC, PER ASTM-D-5205
LOCK NUT	STEEL, CORROSION RESISTANT, PER ASTM-A-582, UNS NO. S30300, PASSIVATE PER ASTM-A-967
LOCK WASHER	410 STAINLESS STEEL, PASSIVATE PER ASTM-A-967
O-RING	SILICONE RUBBER PER ZZ-R-765
APPLICATION	
CABLE(S)	N/A
INSTALLATION	N/A

THIS DRAWING IS PROPRIETARY AND CONFIDENTIAL.

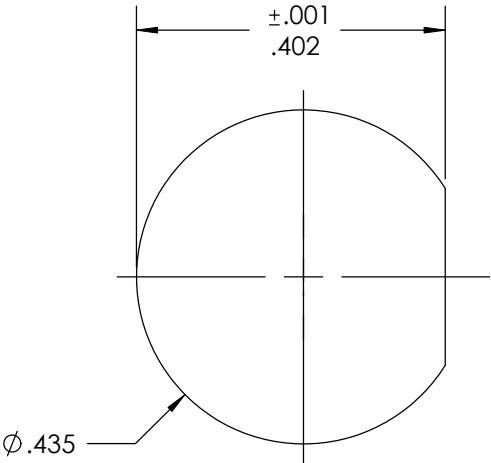

ISOMETRIC VIEW
SCALE 2:1

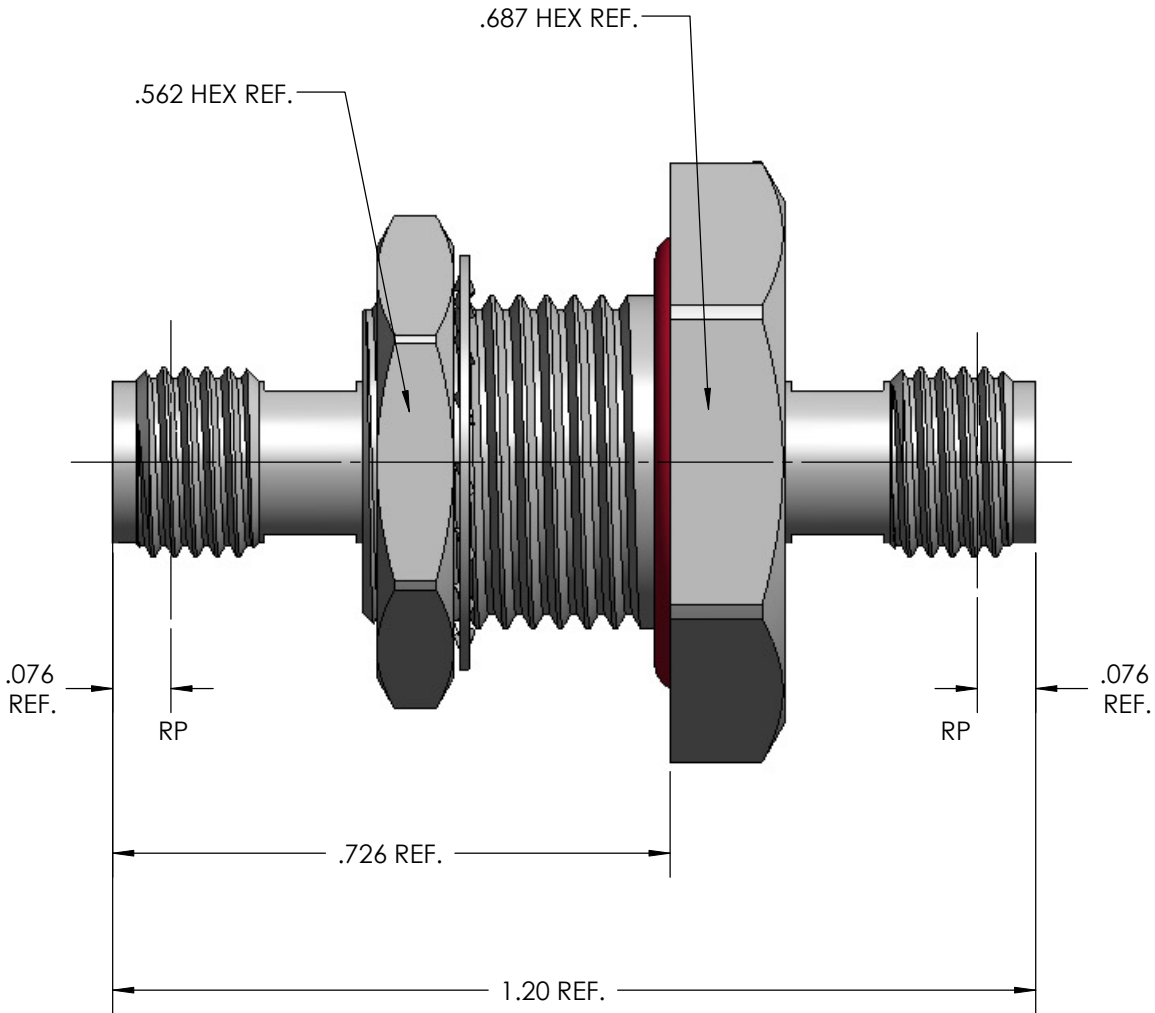

RECOMMENDED
MOUNTING HOLE

REV.	DESCRIPTION	DATE	BY	APPVD
A	INITIAL RELEASE, RDCR 107009	10/25/2010	PLM	RS
A1	ECO 115533	09/08/2011	PLM	RS
B	ECO 125494	9/13/2012	MJM	RS

SPECIFICATION DRAWING

THIS SPECIFICATION IS THE PROPERTY OF MICRO-COAX, INC. AND MAY NOT BE USED OR COPIED WITHOUT THE EXPRESS WRITTEN PERMISSION OF MICRO-COAX, INC.		INITIALS		DATE		MICRO-COAX[®] Leading the way in transmission line solutions. Copyright Micro-Coax, Inc.					
		DWN.	SRS	07/21/05							
		CHKD.	CCF	09/12/11							
		APPVD.									
TOLERANCES UNLESS OTHERWISE SPECIFIED		TITLE									
		3.5mm, FEEDTHRU ADAPTER, SHORT, JACK-JACK									
.XX	± .02	ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED. SCREW THDS. TO BE IN ACCORD WITH ANSI B1.1-1989.				FSCM NO.	SIZE	SCALE	SHEET NO.	DRAWING NO.	REV
.XXX	± .005					64639	B	4:1	1 OF 1	SD904410	B
.XXXX	± .0010										
ANGLES	± 2°										