

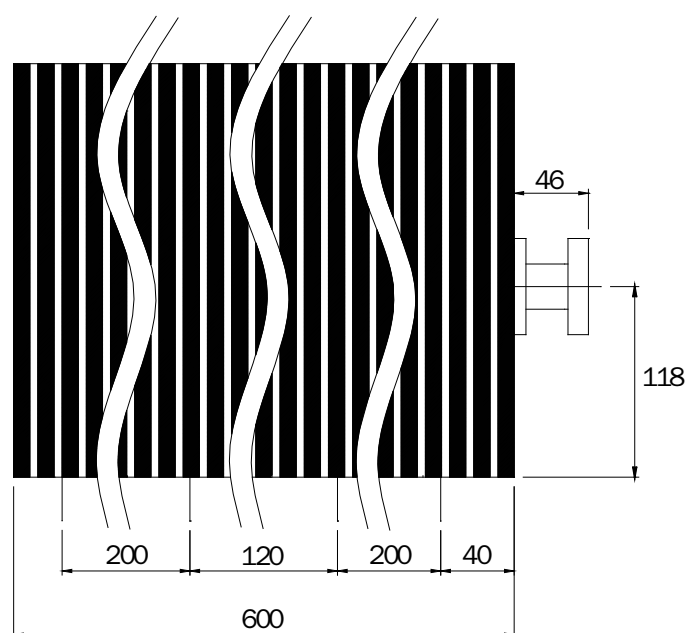


Standards
NF C 96-315
MIL-DTL-39030

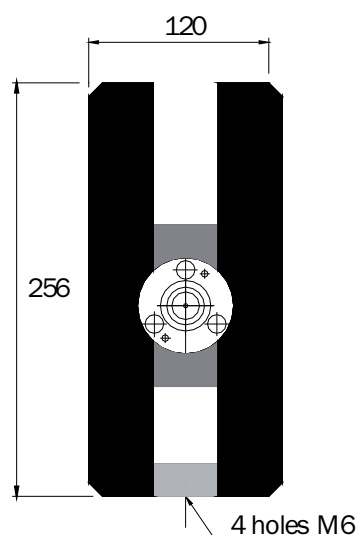

Impedance	$50 \Omega \pm 5\%$
Frequency	DC - 1 GHz
Max VSWR	≤ 1.10 at 1 GHz
Temperature range	-55 to +125°C
Average power @ 25°C	1.5 kW
Peak power	40 kW
Weight	24 kg

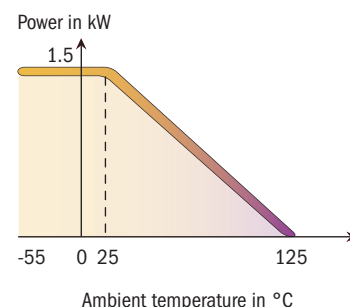

Dimensions in mm

P/N	Connector
17-0262	EIA 7/8 "
17-0511*	EIA 7/8 "

* with thermoswitch 130°C