

RBPf₃₃G02G04

Summary:


- SSS Filter - Suspended Substrate Stripline Filter
- Flat frequency response and low insertion loss..
 - Covers the 1 GHz to 18 GHz Frequency Range
- Wide bandwidth and 3 dB BW Available from 5-50% (f_0)
 - Designs that Cover up to 40 GHz Also Available
 - MIL-E-5400 standard

Pass Band	1dB Pass Band(GHz)	VSWR	Stop Band (GHz)	Rejection (dB)	Connector	Power (W)
2-4GHz	2.1-3.8	1.80	DC-1.7GHz 4.6-7.0GHz	45	SMA-F	15

Environmental Specifications:

Operational Temp. Range: -55°C~+85°C

Storage Temp. Range: -55°C~+100°C

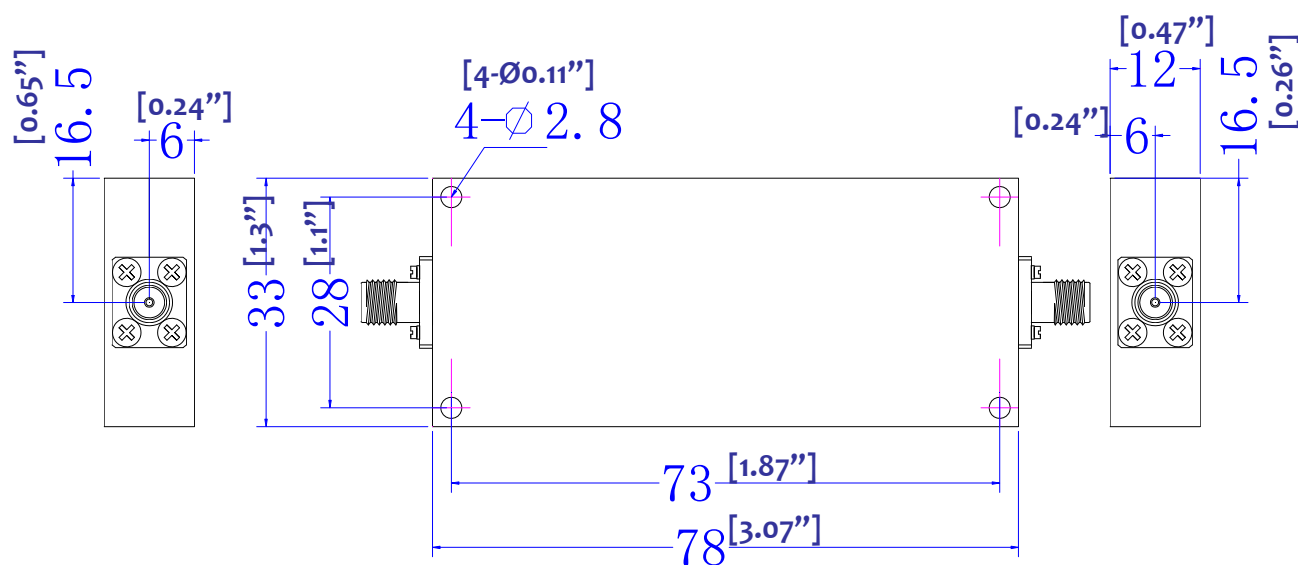

Band Pass Suspended Stripline Filter 2-4GHz

