



Electrical specifications

Center Frequency: 4180 MHz
Bandwidth: 40 MHz
VSWR: 15 dB min
Input / Output Impedance: 50 Ohms
Passband: 4160-4200 MHz
Passband Insertion Loss: 3.0 dB max
Passband Ripple: 1.0 dB max
Rejection: 50 dB min at 3890 MHz
Power Handling: 3 watt max

Mechanical


Mounting Method: SMT
Dimensions: 26.4 x 14 x 4.65 mm

Environmental

Operating Temperature: -40°C to +85°C
Storage Temperature: -50°C to +90°C

This product is RoHs compliant.

Outline Drawing:

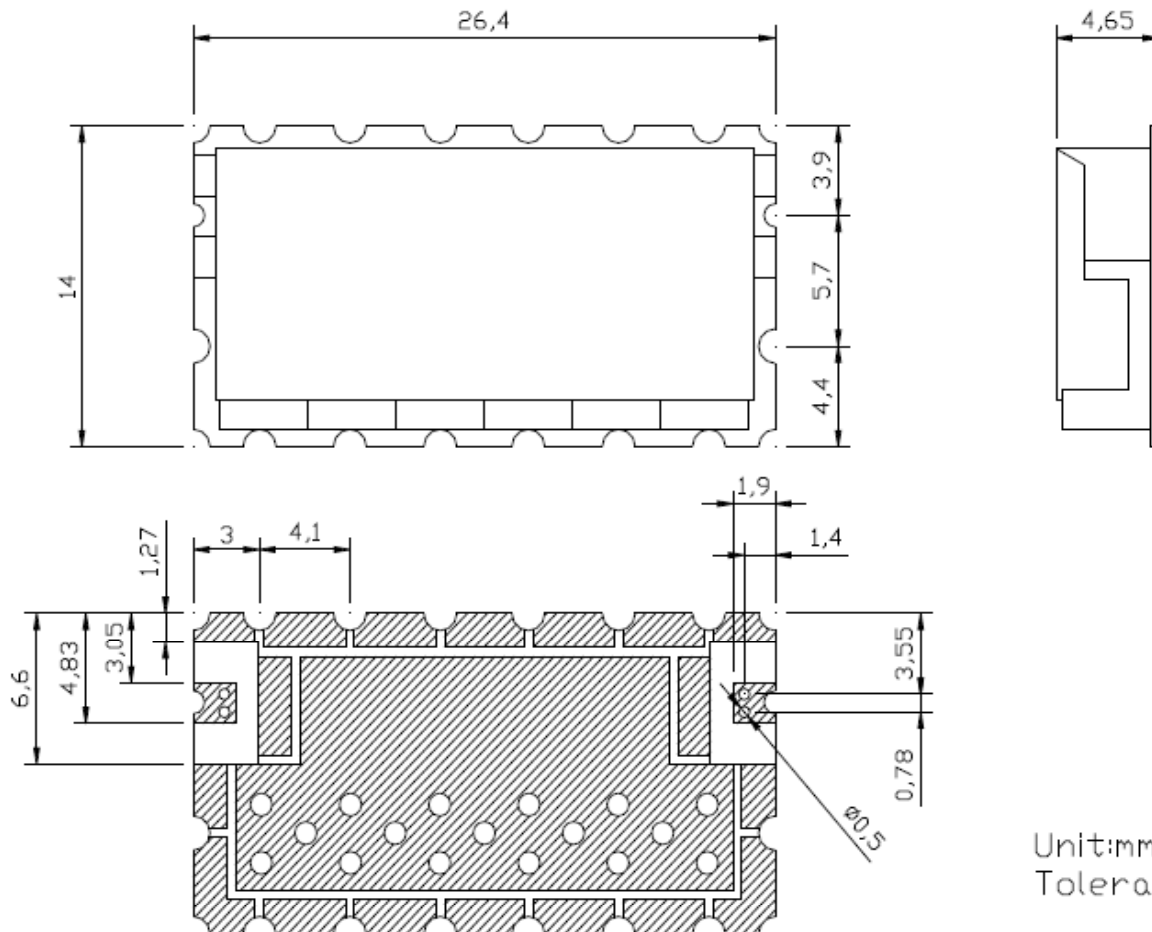

Unit:mm
Tolerance:±0.3