

DESCRIPTION:

PMI MODEL NUMBER PVVAN-0510-60-MP IS AN ANALOG CONTROLLED 60 DB PIN DIODE ATTENUATOR OPERATING OVER THE FREQUENCY RANGE OF 0.5 GHz TO 1.0 GHz.

SPECIFICATIONS:

- FREQUENCY: 0.5 GHz TO 1.0 GHz
- MEAN ATTENUATION RANGE: 60dB
- INSERTION LOSS: 2.0 dB MAX
- VSWR: 2.0:1 MAX
- POWER RATING: +20dBm (Operating)
+30dBm (Survival)
- ATTENUATION FLATNESS:
 - @ 10 dB ±0.45 dB
 - @ 20dB ±0.8 dB
 - @ 40dB ±1.5 dB
 - @ 60dB ±1.6 dB
- SWITCHING TIME: 500 nsec MAX
- CONTROL: 10dB/Volt Analog Controlled
- POWER SUPPLY: +12V to +15V @ 125mA MAX
-12V to -15V @ 50mA MAX
- PWR/CTL CONNECTORS: 15 PIN Micro-D-Female (MATING CONNECTOR SUPPLIED)
- RF CONNECTORS: SMA - Female
- FINISH: PAINTED GRAY
- SIZE: (L) 2.00" X (W) 1.80" X(H) 0.50"



ENVIRONMENTAL RATINGS:

- TEMPERATURE: -55°C TO +85°C (OPERATING)
-65°C TO +125°C (STORAGE)
- HUMIDITY: MIL-STD-202F, METHOD 103B COND. B
- SHOCK: MIL-STD-202F, METHOD 213B COND. B
- VIBRATION: MIL-STD-202F, METHOD 204D COND. B
- ALTITUDE: MIL-STD-202F, METHOD 105C COND. B
- TEMPERATURE CYCLE: MIL-STD-202F, METHOD 107

NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A	ORIGINAL RELEASE	11/3/11	

PIN NO:	J3 PIN FUNCTIONS
1	N/C
2	N/C
3	ANALOG INPUT
4	GND
5	N/C
6	N/C
7	N/C
8	N/C
9	N/C
10	N/C
11	N/C
12	N/C
13	+12 or +15VDC
14	-12 or -15VDC
15	N/C

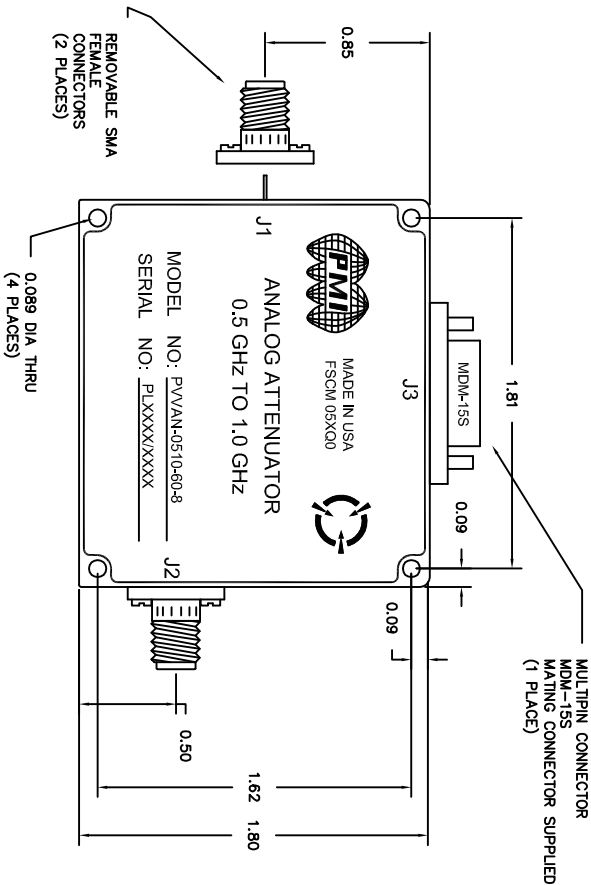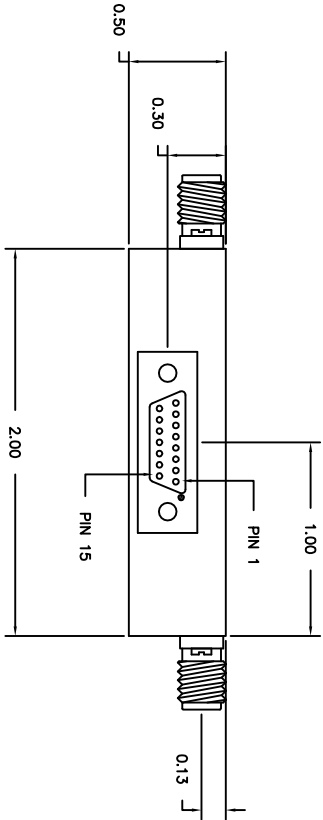

CONFIDENTIAL AND PROPRIETARY

PLANAR MONOLITHICS INDUSTRIES, INC.

7311-F GROVE ROAD
FREDERICK, MARYLAND 21704 USA
TEL: 301-662-5019 FAX: 301-662-1731
WEBSITE: www.pmi-rlf.com
E-MAIL: sales@pmi-rlf.com
ISO 9001:2008 CERTIFIED



PRODUCT FEATURE

PVVAN-0510-60-MP

		TITLE			
APPROVALS	DATE	PRODUCT FEATURE PVAN-0510-60-MP			
DRAWN	11/3/11				
CHECKED					
ISSUED					
SIZE	FSCM NO.	DWG NO.			REV.
A	05XQ0	270XXXXX			-
SCALE	N:S		SHEET	1	OF 1