


Tolerances
 1-20=+/-0.2
 20-30=+/-0.3
 30-40=+/-0.4
 40-50=+/-0.5
 50-100=+/-0.75
 100-300=+/-1.5
 Angles=+/-1
Dimensions are in Millimeters

Revisions Description/Approved/Date	Approved M.H.	Date
	Checked M.H.	Date
	Drawn K.R.E.	Date 01/05/07
NOTES (plating thickness in micro-inches): 1. Per QQ-B-626 2. Per QQ-S-764 3. Per QQ-C-530 4. Per QQ-B-750 5. Per MIL-P-19468 6. Per ZZ-R-765 7. Per WW-T-799 8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike 9. Nickel pl. 100 min. over copper strike 10. Per QQ-P-35 11. Gold pl. 5 min. over nickel pl. 50 min. over copper strike		

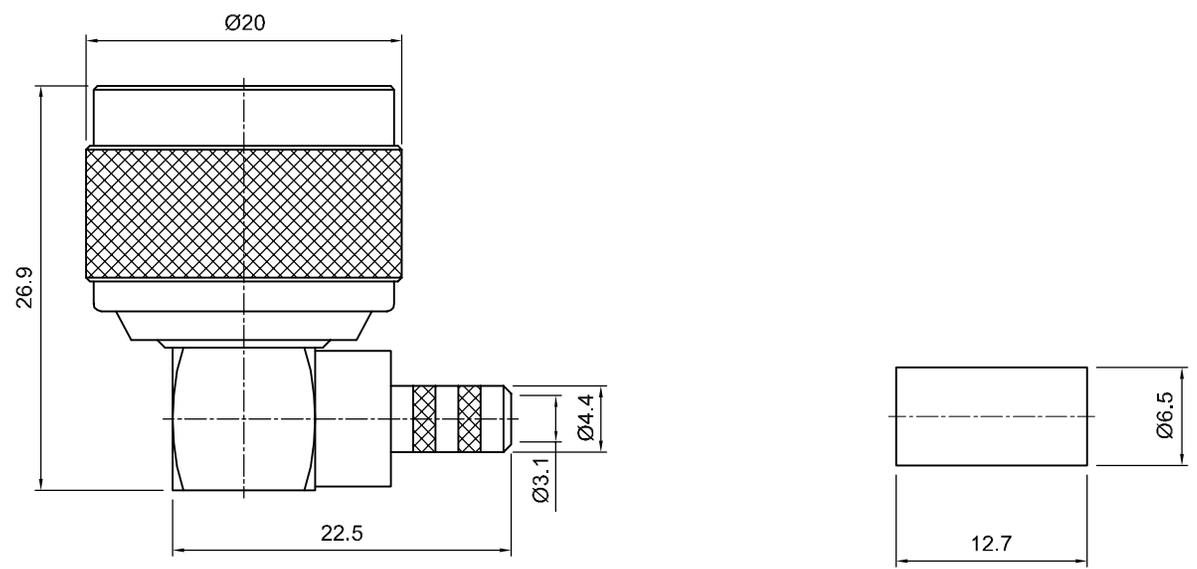

ITEM	MATERIAL	FINISH	 Lighthouse Technologies, Inc. 5640 Kearny Mesa Road, Suite N San Diego, CA 92111 Part Number: LTI-NLM11NT-58
Connector Body	Brass, Note 1	Nickel, Note 9	
Center Contact: Male	Brass, Note 1	Gold, Note 11	
Insulation	Teflon, Note 5	None	
Ferrule	Annealed Copper, Note 7	--	
Gasket	--	--	
Hex Nut	--	--	
Lock Washer	--	--	
Description			N type right angle crimp plug for RG-58 cable.
Description			Nickel plated brass body, Teflon dielectric.
Scale	Drawing No.	File Name	
2:1	LTI-NLM11NT-58	LTI-NLM11NT-58	