




REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

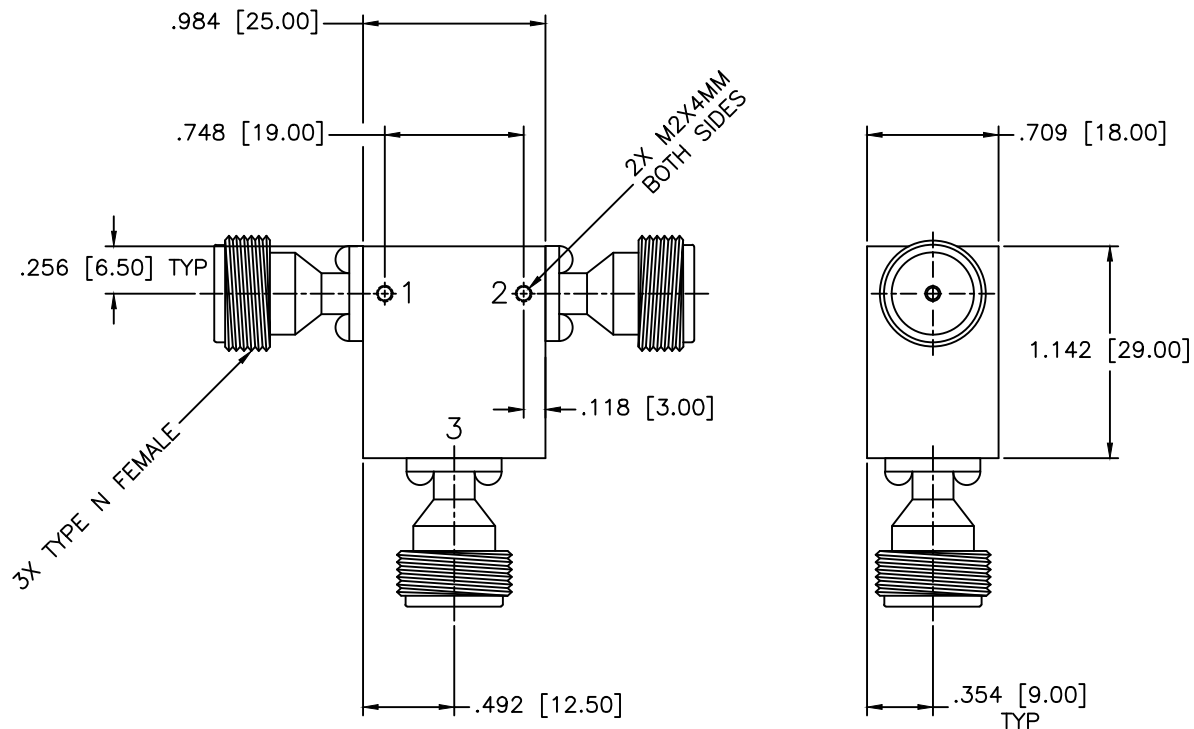

SPECIFICATIONS

Frequency Range: 4–8 GHz
Isolation: 18dB Min.
Insertion loss: 0.5dB Max.
VSWR: 1.35:1 Max.
Power: 25W Avg, 250W Peak.
Operating Temperature: –30°C to +70°C

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.mcli.com		SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: ± 0.01 ANGLE: $\pm 1/2^\circ$		SHEET: N/A
DRAWN: Paiboon Luekhamhan		DRAWING TITLE: COAXIAL CIRCULATOR		
DATE: 01-28-2008		PART NO. CS-19/NF		
APPROVED: T. Nguyen		DATE: 01-28-2008		
		CAGE CODE: 0D2L5		SIZE: A
		REV: N/A		DWG NO. 83047
		DO NOT SCALE THE DRAWING		

