


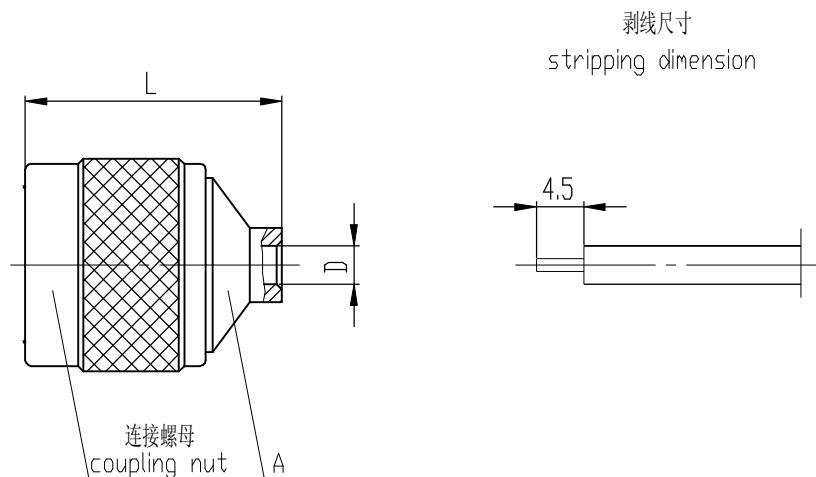

产品型号 type	L	D	零件A part A	连接螺母 coupling nut	电缆型号 cable type
N-JB3	24.0	Ø3.6	黄铜, 镀银 brass, silver plated	黄铜, 镀镍 brass, nickel plated	SFT-50-3-1、RG402/U
N-JB3G				不锈钢, 钝化 stainless steel, passivation	
N-JB5A	26.4	Ø6.4	黄铜, 镀金 brass, gold plated	黄铜, 镀镍 brass, nickel plated	670-250、SMT680-250

Electrical Characteristics:

- Characteristic Impedance: $50\ \Omega$
 - Frequency range: DC~11Ghz
 - Contact resistance
Center conductor: $\leq 1.0\ m\ \Omega$
Out conductor: $\leq 0.2\ m\ \Omega$
 - Insulation resistance: $\geq 5000M\ \Omega$
 - Insulator withstanding: 1500V
 - VSWR: ≤ 1.4
 - Durability: 500cycles
- Application: MIL-C-39012/1E

Material&Finishing

- Center contact :
Male: brass, gold plated
- Bodies: see the table above
- Insulators: PTFE
- Gasket: silicone rubber

主要性能指标:

- 特性阻抗: $50\ \Omega$
- 频率范围: DC~11Ghz
- 接触电阻:
中心导体: $\leq 1.0\ m\ \Omega$
外导体: $\leq 0.2\ m\ \Omega$
- 绝缘电阻: $\geq 5000M\ \Omega$
- 介质耐压: 1500V
- 电压驻波比: ≤ 1.4
- 插拔次数: 500次

执行标准: MIL-C-39012/1E

材料和镀层

- 中心接触件:
插针: 黄铜, 镀金
- 壳体: 见上面的表格
- 绝缘子: 聚四氟乙烯
- 密封圈: 硅橡胶

				SCALE	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE FRACTIONS DECIMALS ANGLES .X± .15 ±1° .XX± .05 .XXX±
				1.5:1	
NAME		DATE			
DRAWN				N-JB3 RF COAXIAL CONNECTOR	
CHECKED					
APPROVED					

西安富士达科技股份有限公司
XI'AN FORSTAR S&T CO.,LTD.