


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

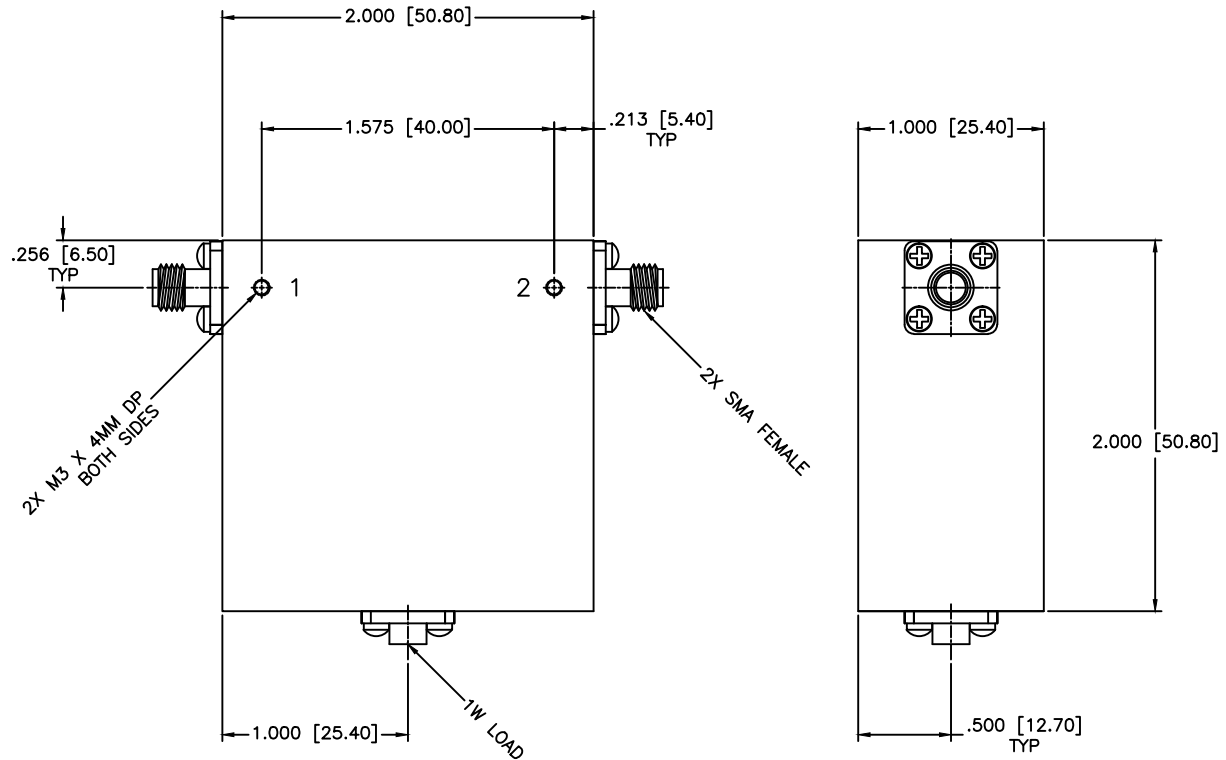

SPECIFICATIONS

Frequency Range: 815–1015 MHz

Isolation: 20dB Min.

Insertion loss: 0.40dB Max.

VSWR: 1.30:1 Max.

Operating Temperature: –54°C to +85°C

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:		N/A							
				SHEET:		N/A							
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.02 ±.008 ANGLE: ±1/2°		DRAWING TITLE:									
				COAXIAL ISOLATOR									
				PART NO.									
DRAWN:		DATE:		IS-50									
Paiboon Luekhamhan		11-22-2013											
APPROVED:		DATE:		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		CAGE CODE:		SIZE:		REV:		DWG NO.	
						OD2L5		A		N/A		86446	
						DO NOT SCALE THE DRAWING							
				THIRD ANGLE PROJECTION									