




This document contains proprietary information and such information may not be disclosed to others for any purposes, nor used for sales/marketing/procurement purposes without written permission

本文件包含专有信息，没有书面许可，该信息不能以任何形式披露给第三方，也不能用于任何目的购买、销售及采购。

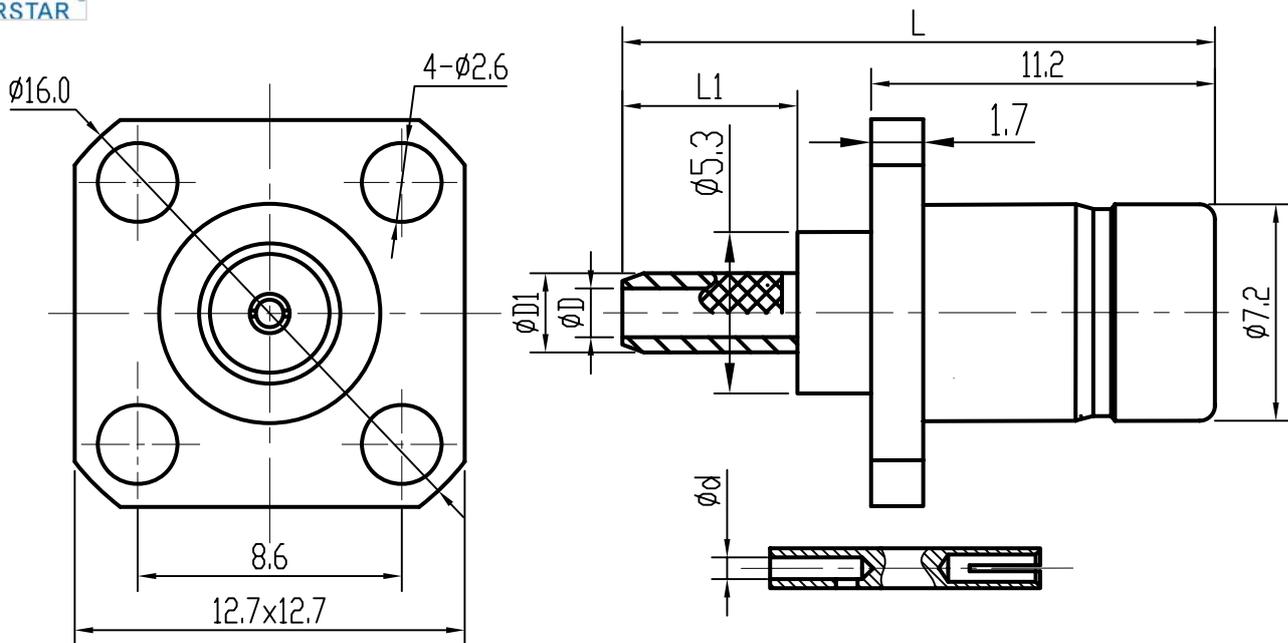

产品型号	ϕd	ϕD	$\phi D1$	L1	L	线夹长度	配接电缆 (cable)
CQA-KF3	0.7	1.6	2.1	5.7	19.3	8.0	SFF-50-1.5-1 RG316/U
CQA-KF4	1.0	2.3	3.4	8.0	21.6	10.0	SFF-50-2-1
CQA-KF5	1.0	3.1	4.4	10	23.6	15.0	SFF-50-3-1 RG141/U

Electrical Characteristics

- Characteristic Impedance: 50 Ω
- Frequency range: DC~18.0GHz
- Contact resistance
Center conductor: $\leq 3.0 \text{ m}\Omega$
Out conductor: $\leq 2.0 \text{ m}\Omega$
- Insulation resistance: $\geq 5000 \text{ M}\Omega$
- Insulator withstanding: 1000V
- Durability: 200cycles

主要性能指标

- 特性阻抗: 50 Ω
- 频率范围: DC~18.0GHz
- 接触电阻:
中心导体: $\leq 3.0 \text{ m}\Omega$
外导体: $\leq 2.0 \text{ m}\Omega$
- 绝缘电阻: $\geq 5000 \text{ M}\Omega$
- 介质耐压: 1000V
- 插拔次数: 200次

Application: MIL-C-39012/55D

Material&Finishing

- Center contact :
beryllium coper, gold plated
- Body: brass, gold plated
- Insulators: PTFE

执行标准: MIL-C-39012/55D

材料和镀层

- 中心接触件:
铍青铜, 镀金
- 壳体: 黄铜, 镀金
- 绝缘子: 聚四氟乙烯

 	SCALE	RF COAXIAL CONNECTOR	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE FRACTIONS DECIMALS ANGLES .X± .15 ±1° .XX± .05 .XXX±
	5:1		
NAME	DATE		
DRAWN			
CHECKED			
APPROVED			

西安富士达科技股份有限公司
XI'AN FORSTAR S&T CO.,LTD.