


DWG. NO.

REV



RoHS 2002/95/EC	

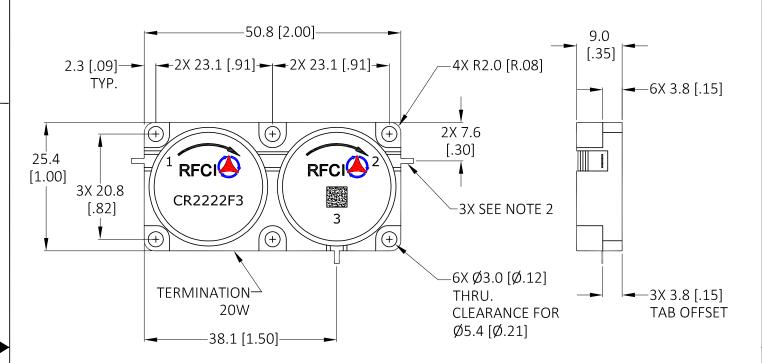

Specifications

Parameter		Minimum	Typical	Maximum
Frequency Range (MHz)		860		960
Insertion Loss (dB)	P1-P2 P2-P3		< .50 < .25	0.60 0.30
Isolation (dB)	P2-P1 P3-P2	40 20	> 48 > 23	
Return Loss (dB)		20	> 23	
FWD IMD: 2T at 37W per T 5MHz Spacing (dBc)			75	

Power & Temperature Ratings

Maximum
1000/200 Watts
200 Watts
-40 to +85° C
-40 to +95° C

NOTES:

- 1. Typical Values Represent Mid-Band Performance @ +23 °C.
- 2. Tab Dims: 1.00[.039]Width x 2.5[.10]Length x .20[.008]Thick.

CW DUAL CIRCULATOR MODEL: CR2222F3

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS (INCHES): TOLERANCES ARE:	THIRD ANGLE PROJECTION]			-01				
1 PLACE DECIMAL ±.2 (±.01) ANGULAR: ±1.0° SURFACE ROUGHNESS 16/	APPROVALS	DATE		R	-(
REMOVE ALL BURRS AND BREAK SHARP EDGES. SURFACE TEXTURE TO BE IN ACCORDANCE WITH LATEST ANSI B46.1	DRAWN BY: HV	04/19/13							
DIMENSIONING & TOLERANCING IN ACCORDANCE WITH LATEST ANSI Y14.5	CHECKED BY: P.T	04/20/13							
PROPRIETARY NOTE: "THE INFORMATION CONTAINED ON THIS DOCUMENT IS CONSIDERED TO BE CONFIDENTIAL MATERIAL PROPRIETARY TO RE	DESIGN BY: P.T	04/01/13							
CIRCULATOR ISOLATOR Inc. (RFCI) AND IS PROVIDED SOLELY FOR INFORMATION PURPOSES.	ENGINEER BY: P.T	04/01/13		OU) I LIIN⊏/	TLINE/SPECS			
THIS INFORMATION SHALL NOT BE USED BY ANYONE OTHER THAN RFCI TO	MFG. ENGR. L.T	4/21/13	SIZE C	AGE NO.	DWG NO.			REV.	
DESIGN OR CONSTRUCT ANY OF THE ITEMS DEPICTED, NOR SHALL IT BE DISCLOSED, DUPLICATED, OR COPIED FOR ANY PURPOSE, NOR MADE	Q.A.		Δ	AGE NO.		0050 0	_	1 4	
AVAILABLE TO ANY THIRD PARTY WITHOUT THE PRIOR WRITTEN CONSENT OF A RFCI OFFICIAL."	PROG. MGMT/MKT		A		UR22	22F3-0	>	'	
DO NOT SCALE DRAWING			SCALE:	FULL		SHI	EET 1 OF 1		
		A				•			