

Lorch Microwave's PCS B Band Duplexer provides high transmit to receive selectivity while minimizing insertion loss. The unit is available with temperature compensation and weatherproofing as an option for use in more extreme environmental conditions.




Standard Design Features

Passbands	
Receive	1870-1885 MHz
Transmit	1950-1965 MHz
Passband Insertion Loss	0.5 dB typ, 1.0 dB max
Passband Return Loss	18 dB min
Antenna to Transmit Rejection	
1850-1870 MHz	80 dB min
1870-1885 MHz	100 dB typ, 80 dB min
1885-1910 MHz	60 dB min
Antenna to Receive Rejection	
1930-1950 MHz	60 dB min
1950-1965 MHz	100 dB typ, 80 dB min
1965-1990 MHz	80 dB min
Rx - Tx Isolation	80 dB min
Power Handling	
CW	200 Watts
Peak	1000 Watts
Third Order Intermod	110 dBm min with two +43 dBm tones
Operating Temperature	-20 to +70 deg C
Connectors	Low IM N or 7/16 DIN Female
Size	7.40" x 7.90" x 2.00"*

*Not including connectors

Receive Channel Data

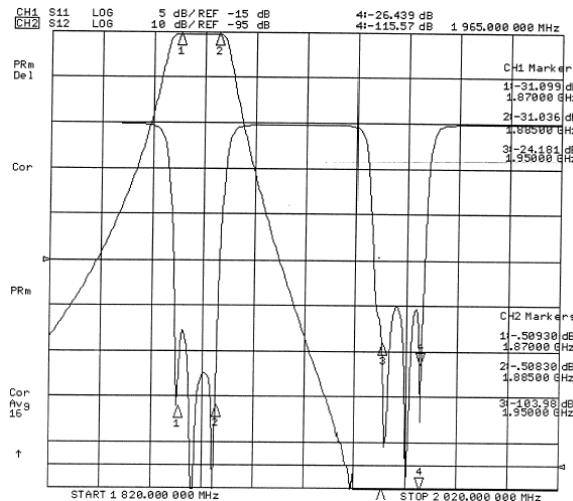

Transmit Channel Data

