



AMP4003P SOLID STATE HIGH POWER PULSE AMPLIFIER

PRELIMINARY

FEATURES

Small form factor rack mounted system
High power advanced GaN pulse devices
Instantaneous bandwidth
Suitable for linear pulse applications
Built-in protection circuits
High efficiency, reliability and ruggedness



ELECTRICAL SPECIFICATIONS

Parameter	Specification	Notes
Operating Frequency Range	2.7 - 3.0 GHz	
Peak Output Power	10 KWatt Mom	Double RF pulse "couple"
Short Pulse Width	10 μ Sec	
Long Pulse Width	100 μ Sec	
Time Between Pulses	100 μ Sec	
Couple Repetition Frequency (PRF)	800 to 1000 Hz	
Rise / Fall Time	<110 nS / <100 nS, >30 nS	10% to 90%
Input Peak Power	17 dBm $\pm$ 1.0dB Nom	
Output power flatness with frequency	$\leq$ 0.5 dB	BW respect to mean power lvl
Harmonics	30 dBc Min	
Spurious	70 dBc Min	
Power flatness	$\leq$ 1.0 dB	Over operating frequency
Pulse Width Variation(Jitter)	<-70 nS	
Pulse Width	10 - 100 μ Sec	
Amplitude Pulse Droop	$\leq$ 0.5 dB for 100 μ Sec Pulse $\leq$ 0.2 dB for 10 μ Sec Pulse	
Amplitude Ripple	$\leq$ 0.3 dB	
Phase change along the pulse	$\leq$ 35°, 0 $\leq$ t $\leq$ 5 μ Sec $\leq$ 50°, 5 $\leq$ t $\leq$ 100 μ Sec	
Phase ripple along the pulse	$\leq$ 1°	
Pulse to pulse phase stability	<0.018°	
Pulse Amplitude Stability	<0.0027 dB	
RF ON-OFF transition time	$\leq$ 1 μ Sec	Including delay and rise time
Acoustic Noise	<70 dBa	
Eave Shape Transmitter	NLFM	
Cooling	Forced air	
Stability	65 dB	
Input / Output VSWR	1.5 : 1 Min	
Duplexer	Solid-State Circulator	
Pulse Phase Noise	$\leq$ 100 dBc/Hz @ 1 KHz from carrier	



AMP4003P SOLID STATE HIGH POWER PULSE AMPLIFIER

PRELIMINARY

POWER SUPPLY

Parameter	Specification	Notes
Main Power	380/220 VAC, 48-64Hz, 3 Phase & Natural	
Static Variation of Nominal Voltage	±15%	
Unbalanced Voltage Between Phases	<3%	
Total Harmonic Distortions	<5%	
Spikes between lines & ground & line to line	<2500 Vp for 4 Sec	
Transients	<700 Vp for 2 mSec	
Power factor	0.8 Min	

ENVIRONMENTAL CHARACTERISTICS

Parameter	Specification	Notes
Operating Ambient Temperature	-20 to +55°C	
Storage Temperature	-40 to +70°C	
Relative Humidity	95% @ 40°C	Non Condensing
Shock & Vibrations	MIL STD 810E	
EMI/EMC	MIL STD 461E	
Cabinet Emittted Radiation	Residual RF radiation < 5mW/cm ³	Continuous 8 hours exposure

MECHANICAL SPECIFICATIONS

Parameter	Specification	Notes
Dimensions W x H x D	R3U + R5U + R3U	Without cabinet
Weight		
RF Connectors In/Out	Type N F / Waveguide WR284	
RF Output Monitoring FWD / REV	Type N F	
AC Power	380/220 VVAC 48 to 64 Hz	3 Phase & neutral
Interface Connector	55 Pin circular female	
Monitor & Control - OPTIONAL Interface	1 Ethernet RJ-45 circular connector TCP/IP 1 RS422/485 D-dub 9S port for redundancy	Remote Bluetooth application
Cooling	Built in forced air	

INTERFACE CONNECTOR

PIN	CONNECTOR	



AMP4003P SOLID STATE HIGH POWER PULSE AMPLIFIER


PRELIMINARY



AMP4003P SOLID STATE HIGH POWER PULSE AMPLIFIER

PRELIMINARY


OUTLINE DRAWING

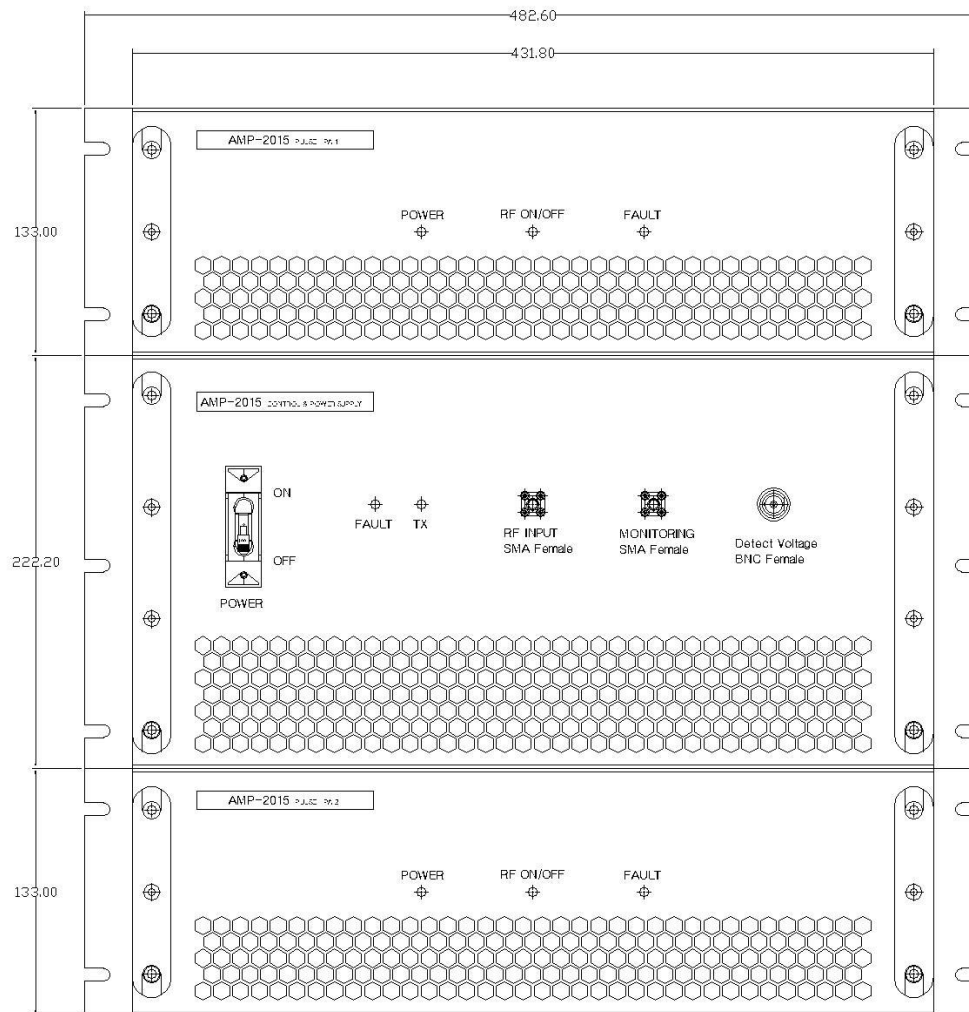



AMP4003P SOLID STATE HIGH POWER PULSE AMPLIFIER

PRELIMINARY

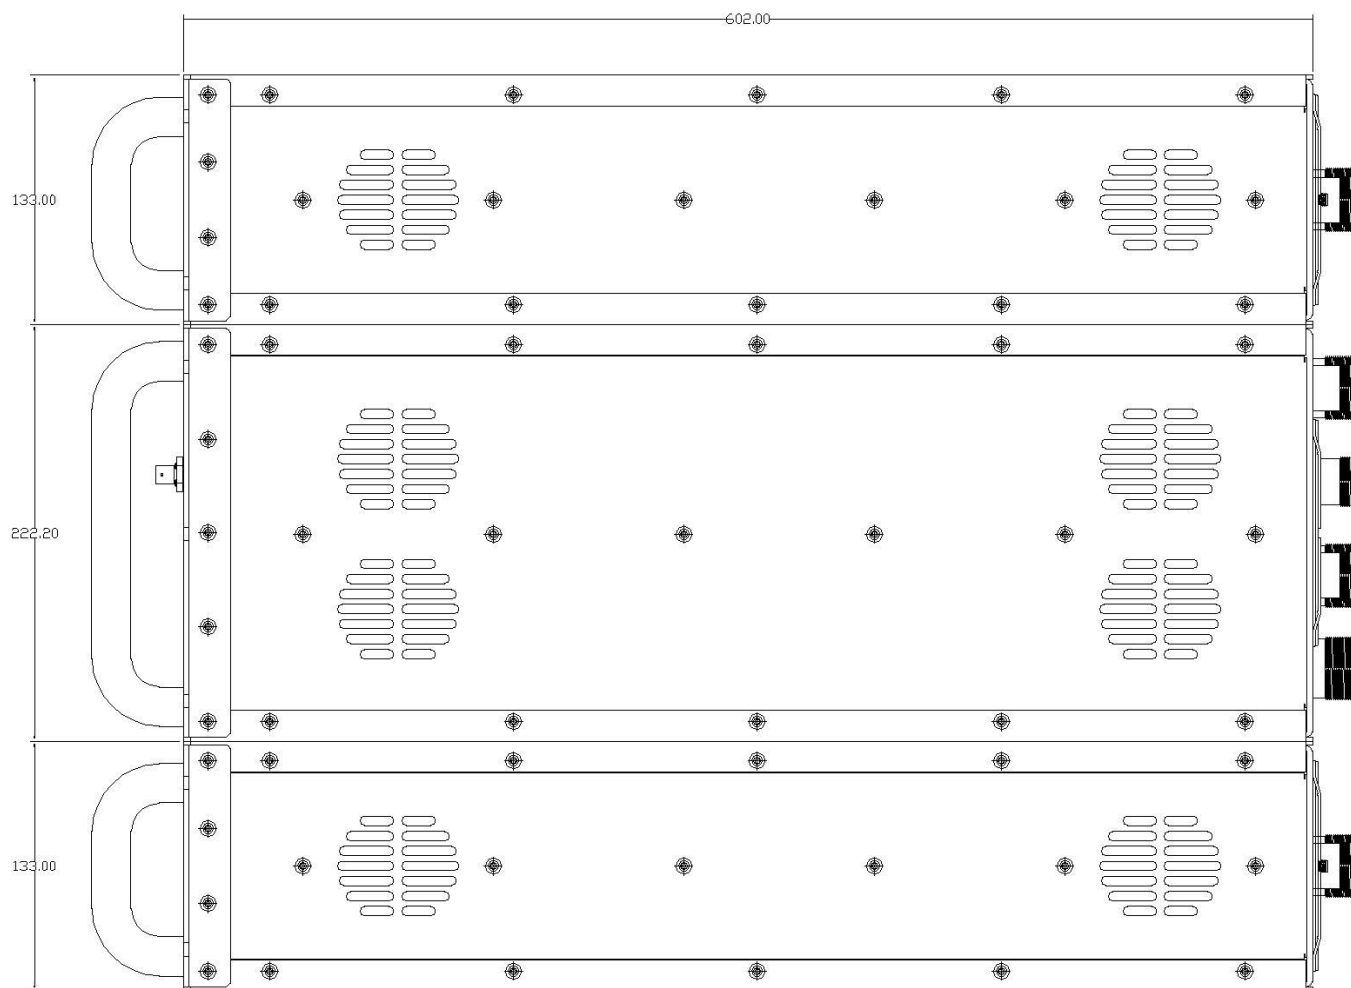

AMP4003P SOLID STATE HIGH POWER PULSE AMPLIFIER

PRELIMINARY

