




6 to 18 GHz Wilkinson Power Divider

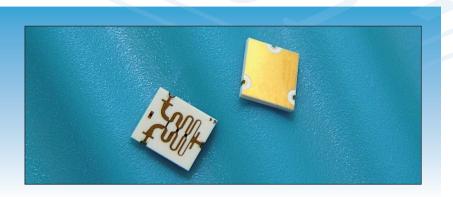

Typical Measured Return Loss

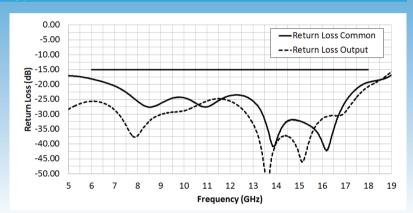

Typical Measured Isolation and Insertion Loss

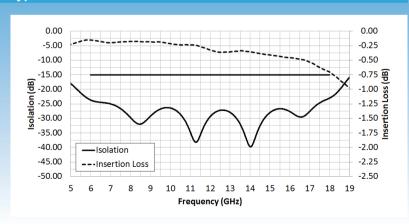

Part number: PDW05758

Description

DLI introduces its new high frequency surface mountable Wilkinson Power Divider. The power divider utilizes DLI's high dielectric ceramic material which provides small size and minimal performance variation over temperature. The compact size, broad band performance and ease of integration make this power divider ideal anywhere board space is of a premium and quality signal splitting or combining is required.

Features

- Broad Band 6 to 18 GHz Performance
- 0.7dB Typical Insertion Loss
- 20dB Typical Isolation and Return Loss
- Excellent Phase and Amplitude Balance
- Compact Solder Surface Mount Package

Specification

Electrical

Frequency Range (GHz)

6 to 18

Nominal Power Splitting (dB)

3.0 (typical)

Nominal Phase Shift (degrees)

0.0 (typical)

Amplitude Balance (dB)

±0.025 max.

Phase Balance (degrees)

±3.0 (max.)

Excess Insertion Loss (dB)

0.7 (typical)

Return Loss (dB)

20 (typical)

Isolation (dB) 20 (typical)

Dissipated Power (W)²


TBD (max.)

- 1) Electrical Specifications at 25C; Over Temperature
- 2) Power Handling and Aging Determination In Progress.



1 knowles

Recommended PCB Layout Dimensions

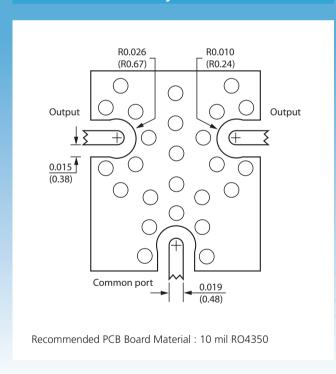

Oualifications









Dielectric Laboratories, Inc 2777 Route 20 East, Cazenovia, NY 13035 USA



Phone: +1 315 655 8710 Fax: +1 315 655 0445 Email: sales@dilabs.com



Novacap 25111 Anza Drive, Valencia, CA 91355 USA



Phone: +1 661 295 5920 Fax: +1 661 295 5928 Email: info@novacap.com



Syfer Technology Limited Old Stoke Road, Arminghall, Norwich, NR14 8SQ UK



Phone: +44 1603 723300 Fax: +44 1603 723301 Email: sales@syfer.co.uk



Voltronics Corporation 2250 Northwood Drive, Salisbury, MD 21801 USA



Phone: +1 410 749 2424 Fax: +1 443 260 2263 Email: info@voltronicscorp.com