



Low PIM N Female to 7/16 DIN Female Adapter Low VSWR

TECHNICAL DATA SHEET

PE91033

Low PIM N Female to 7/16 DIN Female Adapter Low VSWR

- PIM levels <-165 dBc
- Low VSWR levels up to 8GHz
- Tri-metal coating provides a durable surface with good corrosion protection abrasion resistance and superior electrical contact properties.
- Available in various connector combinations including 7/16 DIN in-series, Type N in-series, and 7/16 DIN to Type N and SMA between series
- 4-hole flange and bulkhead mount styles available
- Ideal choice for use in portable PIM testing applications

Configuration

Connector 1	N Female
Impedance 1	50 Ohms
Connector Specification 1	MIL-STD-348
Connector 2	7/16 DIN Female
Impedance 2	50 Ohms
Connector Specification 2	IEC 169-4 (0.232 dia. Enhancement)
Adapter Design	Low PIM
Body Style	Straight

Electrical Specifications

Frequency Range, GHz	DC to 8
Maximum VSWR	1.23:1
Group Delay, ps	225
Dielectric Withstanding Voltage, Vrms	1,000
Maximum Passive Intermodulation (2 x 20 Watts), dBc	-165

Frequency 1

Frequency, MHz	DC to 1,000
VSWR	1.04:1
Return Loss, dB	36

Frequency 2

Frequency, GHz	1 to 4
VSWR	1.12:1
Return Loss, dB	25

Frequency 3

Frequency, GHz	4 to 8
VSWR	1.23:1
Return Loss, dB	20

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Low PIM N Female to 7/16 DIN Female Adapter Low VSWR PE91033](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



Low PIM N Female to 7/16 DIN Female Adapter Low VSWR

TECHNICAL DATA SHEET

PE91033

Mechanical Specifications

Temperature

Operating Range, deg C -55 to +155

Size

Length, in [mm] 1.95 [49.53]
Width/Dia., in [mm] 1.142 [29.01]
Weight, lbs [g] 0.19 [86.18]

Connector 1

Type N Female
Mating Cycles 500
Inner Conductor Material and Plating Beryllium Copper, Silver
Inner Conductor Plating Specification 200 [5] μ in. [μ m] minimum
Body Material and Plating Brass, Tri-Metal
Body Plating Specification 100 [2.54] μ in. [μ m] minimum
Dielectric Type PTFE

Connector 2

Type 7/16 DIN Female
Mating Cycles 500
Inner Conductor Material and Plating Beryllium Copper, Silver
Inner Conductor Plating Specification 200 [5] μ in. [μ m] minimum
Body Material and Plating Brass, Tri-Metal
Body Plating Specification 100 [2.54] μ in. [μ m] minimum
Dielectric Type PTFE

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant Yes

Plotted and Other Data

Notes: Values at 25 °C, sea level

Low PIM N Female to 7/16 DIN Female Adapter Low VSWR from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Low PIM N Female to 7/16 DIN Female Adapter Low VSWR PE91033](http://www.pasternack.com/n-female-7-16-female-straight-adapter-pe91033-p.aspx)

URL: <http://www.pasternack.com/n-female-7-16-female-straight-adapter-pe91033-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE91033 CAD Drawing

Low PIM N Female to 7/16 DIN Female Adapter Low VSWR

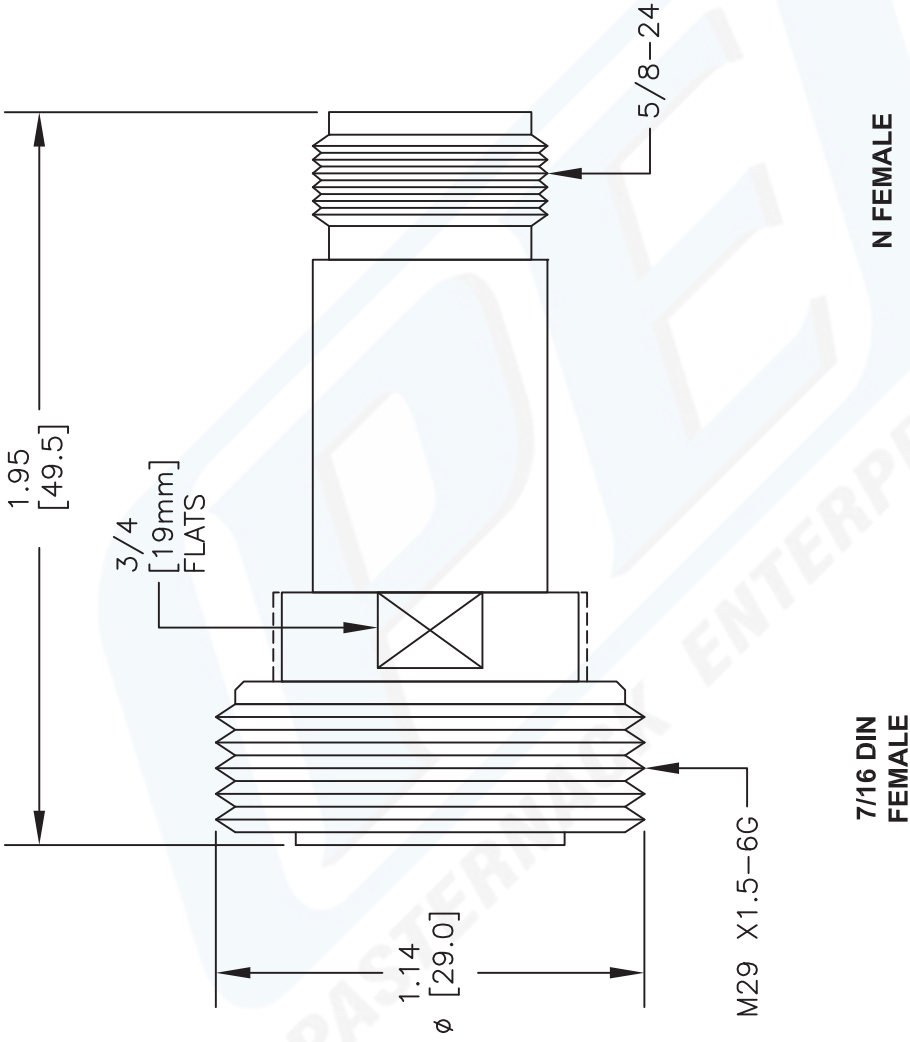

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE
PE91033

PASTERNAK ENTERPRISES, INC.
P.O. BOX 16759, IRVINE, CA 92623
PHONE (949) 261-1920 FAX (949) 261-7451
WEB ADDRESS: www.pasternack.com
E-MAIL ADDRESS: sales@pasternack.com
COAXIAL & FIBER OPTICS



REV. -	FSCM NO. 53919	CAD FILE 050312	SCALE N/A	SIZE A	2233
--------	----------------	-----------------	-----------	--------	------