

POWER DIVIDER N 800-2200MHZ DC BLOCK

SMP8752

SPECIFICATIONS

ELECTRICAL


1 PATH IS DC BLOCKED

FREQUENCY: 800-2200 MHZ
ISOLATION: 22 DB MIN
POWER: 10 W AVG
IMPEDANCE: 50 OHMS
VSWR: 1.25:1 MAX IN, 1.2 MAX OUT
LOSS: 3.4 DB MAX (3+.4)


MECHANICAL

MATERIALS BODY: PASSIVATED ALUMINUM
CONNECTORS: N-FEMALE, NICKEL PLATING
CONNECTOR CONTACTS: BeCu, Au PLATING
CONNECTOR DIELECTRIC: TEFLON
CONNECTOR INTERFACE: MIL-STD-348A
PAINT: GRAY

ROHS COMPLIANT

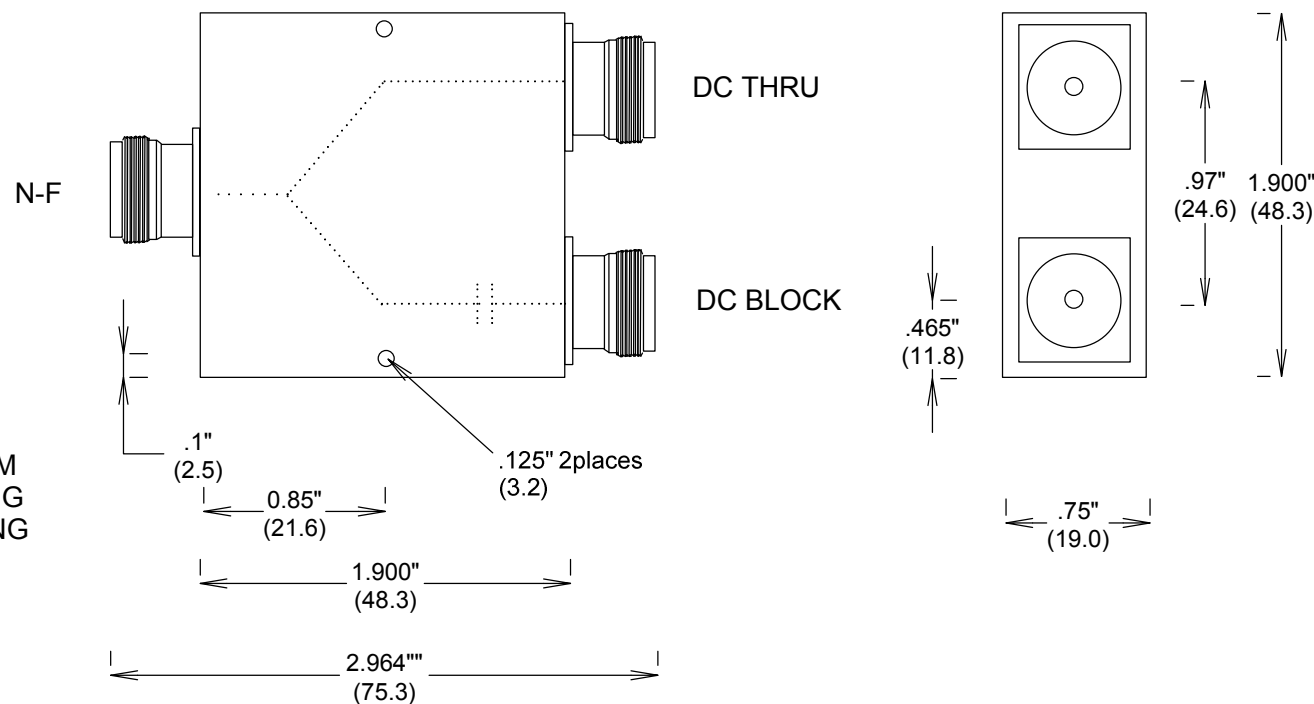

MEASUREMENTS BELOW ARE TYPICAL

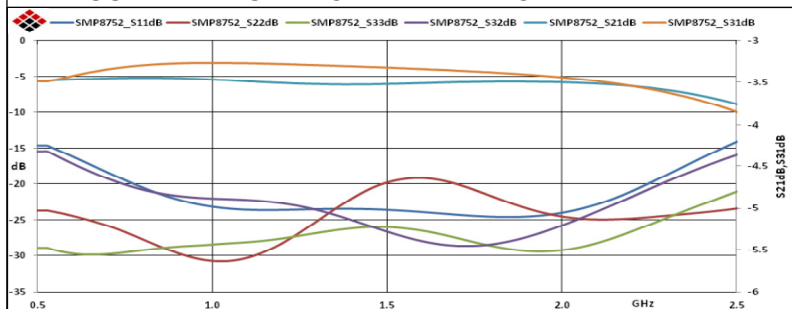

ALL DIMENSIONS IN inches(MM) Typical

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

POWER DIVIDER N 800-2200MHZ DC BLOCK

SIZE

A

CAGE CODE

3FKR5

DWG NO

SMP8752

REV

A

SCALE

SHEET