

SMA PCB THROUGH HOLE


SC8026

SPECIFICATIONS


ELECTRICAL
50 OHMS
VSWR 1.25:1 MAX @ 12 GHZ
FREQUENCY: 0-12 GHZ

MECHANICAL
MATERIAL BODY: AU PLATED BRASS
MATERICAL CONTACTS: BeCu
CONTACT PLATING: Au MIL-G-45204
INTERFACE MIL-STD-348
INSULATION: TEFLON
ROHS COMPLIANT

ENVIRONMENTAL
-65°C TO +165°C

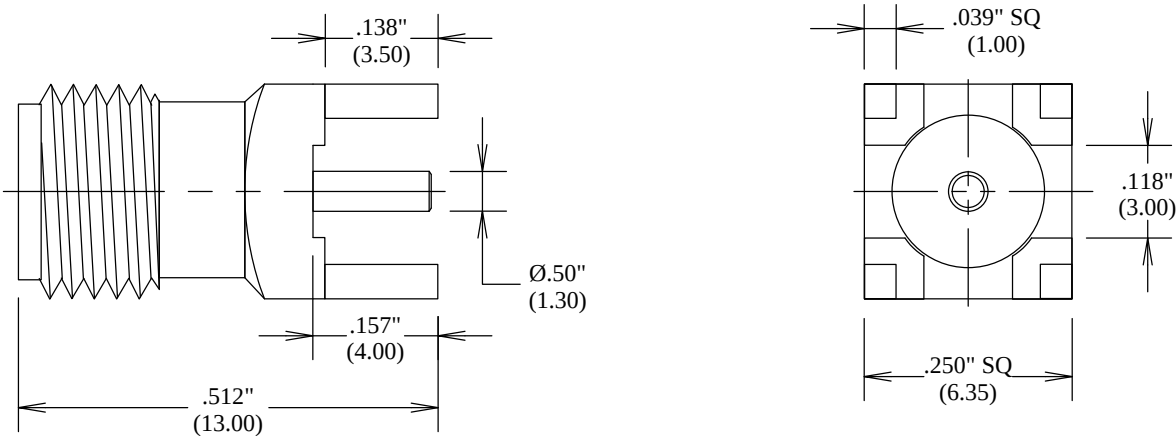

RECOMMENDED MOUNTING HOLE

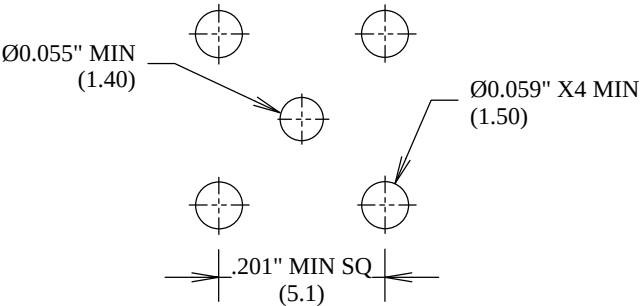

					FAIRVIEW MICROWAVE INC.	
					ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	
					TITLE	
					SMA PCB THROUGH HOLE	
ALL DIMENSIONS IN inches(MM) Typical					SIZE	REV
					A	A
					CAGE CODE	
					3FKR5	
					DWG NO	
					SC8026	
					SCALE	SHEET