



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

Approval Sheet For Product Specification

Issued Date:

Product Name: SAW Filter 413.9MHz F11

TST Parts No.:TA0396A

Customer Parts No.:_____

Company:_____

Division:_____

Approved by :_____

Date:_____

Checked by:_____Elvis Chiu

Approval by:_____Francis Chen

Date:_____2005/02/16



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

SAW Filter 413.9 MHz

MODEL NO.: TA0396A

REV. NO.:2

A. MAXIMUM RATING:

1. Input Power Level: 10 dB_m
2. DC voltage: 5 V
3. Operating Temperature: -20°C to +75°C
4. Storage Temperature: -40°C to +85°C




B. ELECTRICAL CHARACTERISTICS:


Item		Min.	Typical	Max.
Center frequency	F _c (dB)	-	413.9	-
Insertion loss (F _c ±0.5 MHz)	IL (dB)	-	2.5	3.8
Amplitude ripple (F _c ±0.5 MHz)	(dB)	-	0.6	1.7
Attenuation (Reference level from 0 dB)				
F _c - 100 ~ F _c - 40.8 MHz	(dB)	40	50	-
F _c + 40 ~ F _c + 100 MHz	(dB)	40	46	-
Source impedance	Z _s (Ω)	-	50Ω//0pF	-
Load impedance	Z _L (Ω)	-	50Ω//0pF	-

Note1. The standard definitions is in JIS C 6703


Note2.

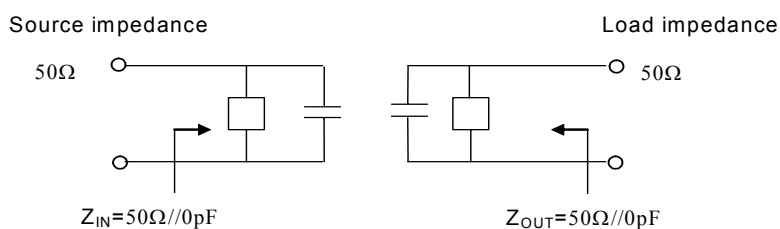

C. Frequency Characteristics :

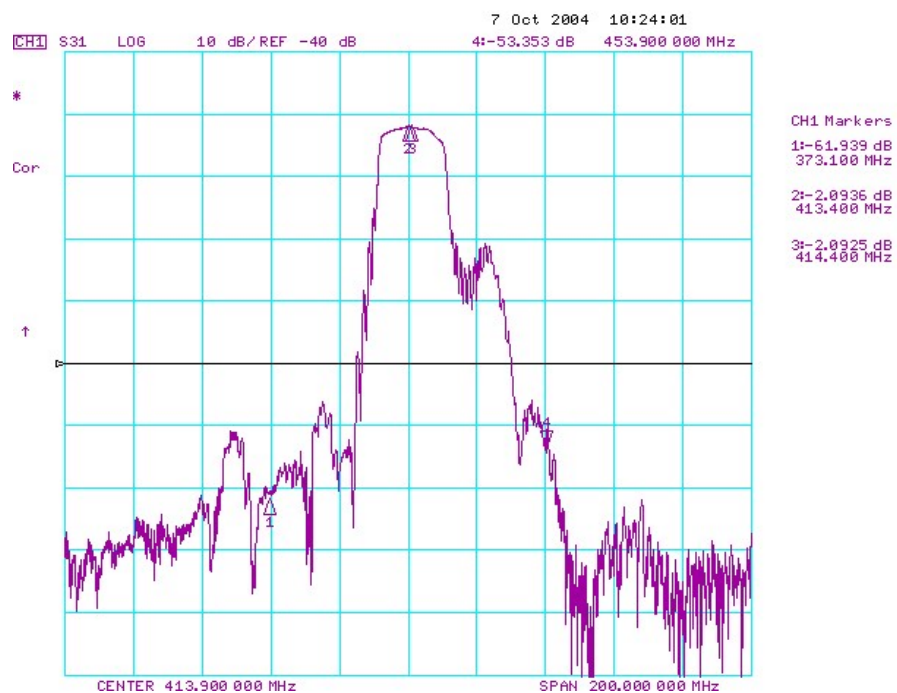

D. MEASUREMENT CIRCUIT:

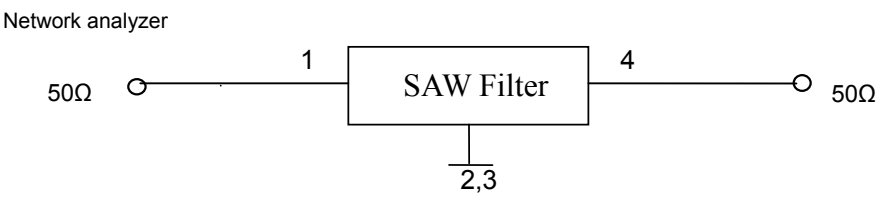

E.OUTLINE DRAWING:

