




This document contains proprietary information and such information may not be disclosed to others for any purposes, nor used for sales/marketing/procurement purposes without written permission

本文件包含专有信息，没有书面许可，该信息不能以任何形式披露给第三方，也不能用于任何目的的买卖、销售及采购。

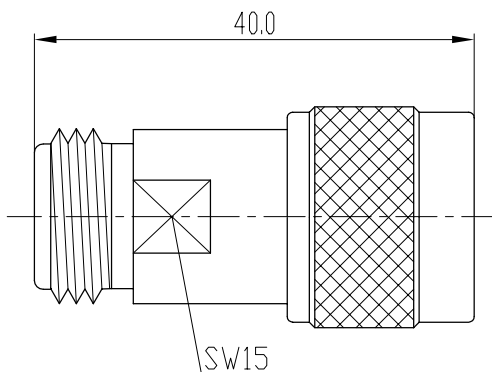

Electrical Characteristics:

1. Characteristic Impedance: $50\ \Omega$
2. Frequency range: DC~11GHz
3. Contact resistance
Center conductor: $\leq 1.0\ m\Omega$
Out conductor: $\leq 0.2\ m\Omega$
4. Insulation resistance: $\geq 5000M\Omega$
5. Insulator withstanding: 1500V
6. Durability: 500cycles

主要性能指标:

1. 特性阻抗: $50\ \Omega$
2. 频率范围: DC~11GHz
3. 接触电阻:
中心导体: $\leq 1.0\ m\Omega$
外导体: $\leq 0.2\ m\Omega$
4. 绝缘电阻: $\geq 5000M\Omega$
5. 介质耐压: 1500V
6. 插拔次数: 500次

Application: MIL-C-39012/1E

执行标准: MIL-C-39012/1E

Material & Finishing

1. Center contact :
Female: phosphor bronze, gold plated
2. Bodies and other metal parts:
brass, nickel plated
3. Insulators: PTFE
4. Gasket: silicone rubber

材料和镀层

1. 中心接触件:
插孔: 锡磷青铜, 镀金
2. 壳体和其它金属零件:
黄铜, 镀镍
3. 绝缘子: 聚四氟乙烯
4. 密封圈: 硅橡胶

	SCALE	
	1.5:1	
	NAME	DATE
DRAWN		
CHECKED		
APPROVED		

N-50JK
RF COAXIAL CONNECTOR

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE mm, TOLERANCES ARE
FRACTIONS DECIMALS ANGLES
.X $\pm$.15 $\pm 1^\circ$
.XX $\pm$.05
.XXX $\pm$

西安富士达科技股份有限公司
XI'AN FORSTAR S&T CO., LTD.