


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

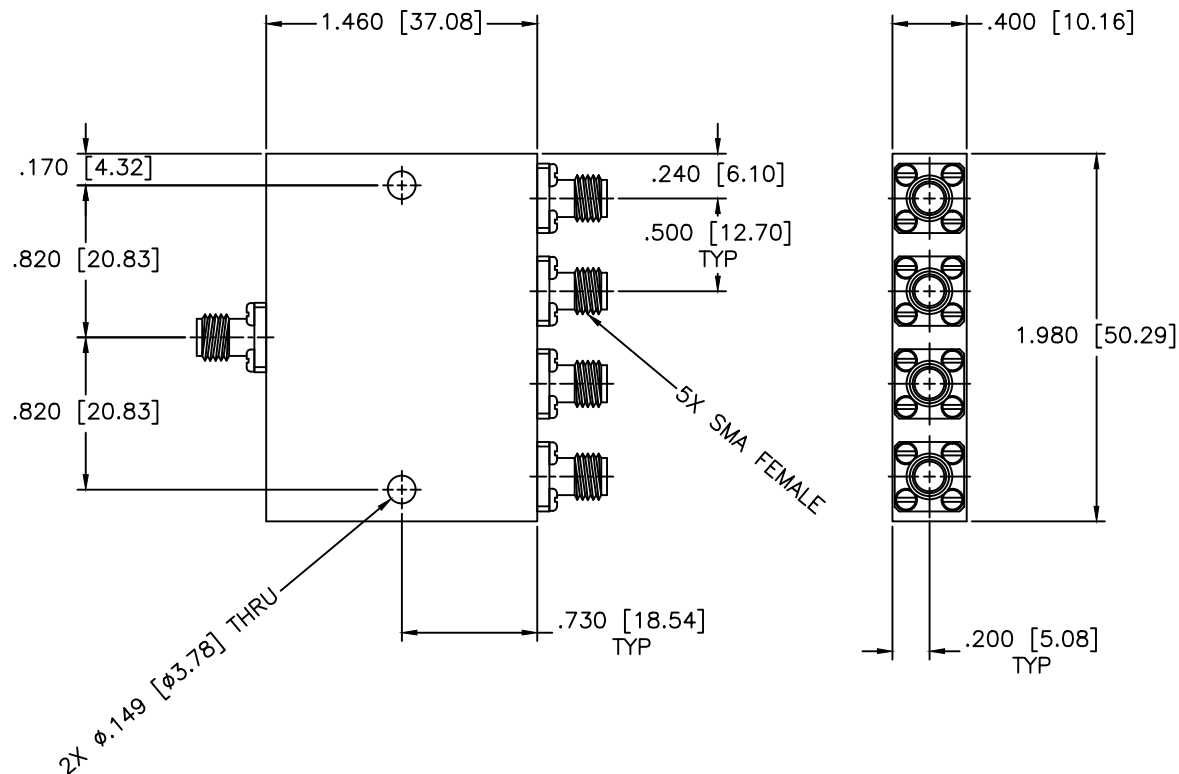

SPECIFICATIONS

Frequency Range: 9–10.1 GHz
 VSWR In/Out: 1.45:1/1.45:1 Max.
 Amplitude Balance: ± 0.3 dB Max.
 Phase Balance: ± 3 Deg. Max.
 Insertion Loss: 1.2 dB Max.
 Isolation: 18 dB Min.
 Power Rating: 30W (Load VSWR @ 1.2)

MATERIAL:  MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
		SHEET: N/A	
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: ± 0.01 ± 0.005 ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: 4-WAY POWER DIVIDER	
		PART NO. PS4-103	
DRAWN: Paiboon Luekhamhan	DATE: 06-16-1999	CAGE CODE: OD2L5	SIZE: A DO NOT SCALE THE DRAWING
APPROVED: T. Nguyen	DATE: 06-16-1999	REV: N/A	DWG NO. 81007