

POWER DIVIDER N 350-6000 MHZ

SMP3560

SPECIFICATIONS


ELECTRICAL

FREQUENCY: 350-6000 MHZ
ISOLATION: 20 DB MIN TO 5GHZ
ISOLATION: 16DB MIN 5-6 GHZ
POWER: 10 W AVG
IMPEDANCE: 50 OHMS
VSWRin: 1.4:1 MAX
VSWRout: 1.3MAX TO 5GHZ, 1.4 TO 6GHZ
LOSS: 3.9 DB MAX (3+.9)


MECHANICAL

MATERIALS BODY: PASSIVATED ALUMINUM
CONNECTORS: N-FEMALE, Si OR TRIPLATE
CONNECTOR CONTACTS: BeCu, Au PLATING
CONNECTOR DIELECTRIC: TEFLON
CONNECTOR INTERFACE: MIL-STD-348A

ROHS COMPLIANT

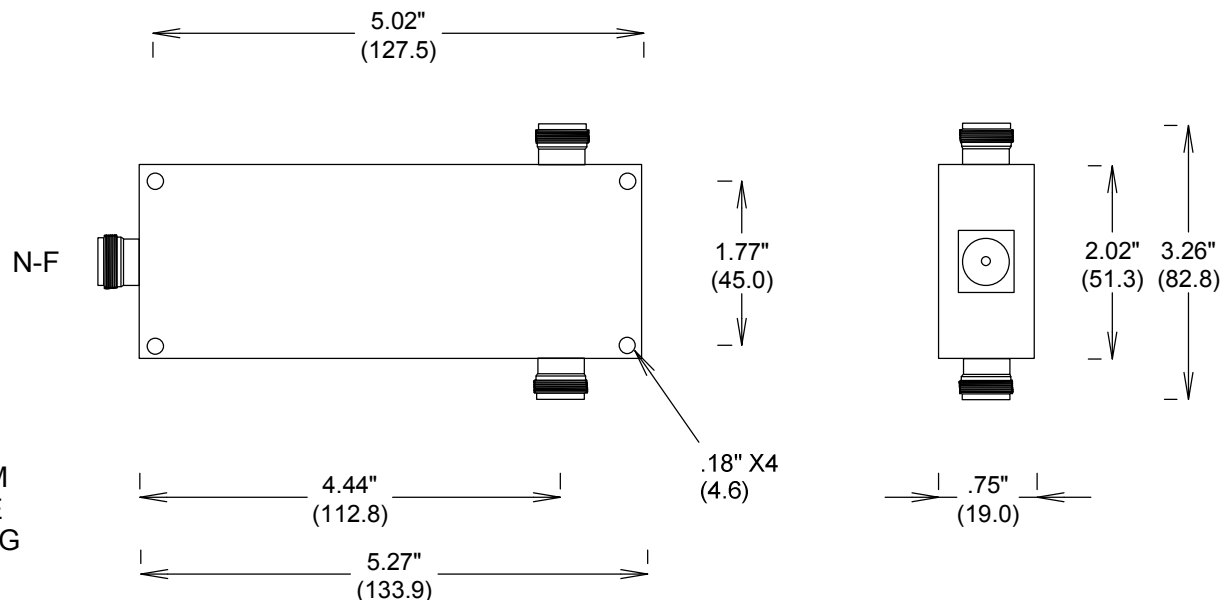

MEASUREMENTS BELOW ARE TYPICAL

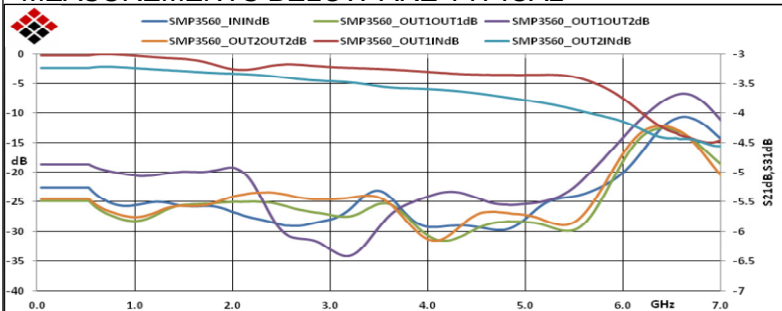

ALL DIMENSIONS IN inches(MM) Typical

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

POWER DIVIDER N 350-6000 MHZ

SIZE

A

CAGE CODE

3FKR5

DWG NO

SMP3560

REV

A

SCALE

SHEET